



APPARENT RESISTIVITY ( $\rho_{DC}$ )  
IN UNITS OF OHM FEET  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 cps

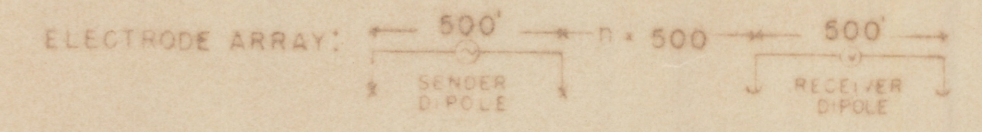

RELATIVE ANOMALY STRENGTH

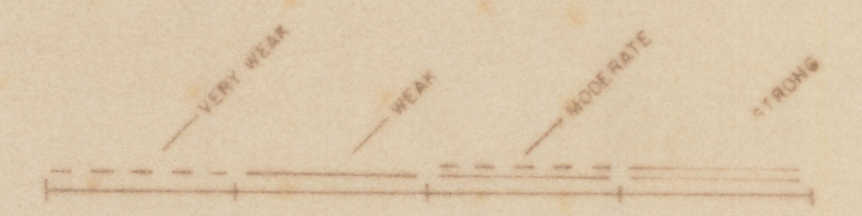


HEINRICHS GEOEXPLORATION COMPANY

INDUCED POLARIZATION TRAVERSE

SECTIONAL DATA SHEET



PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 3.0 cps

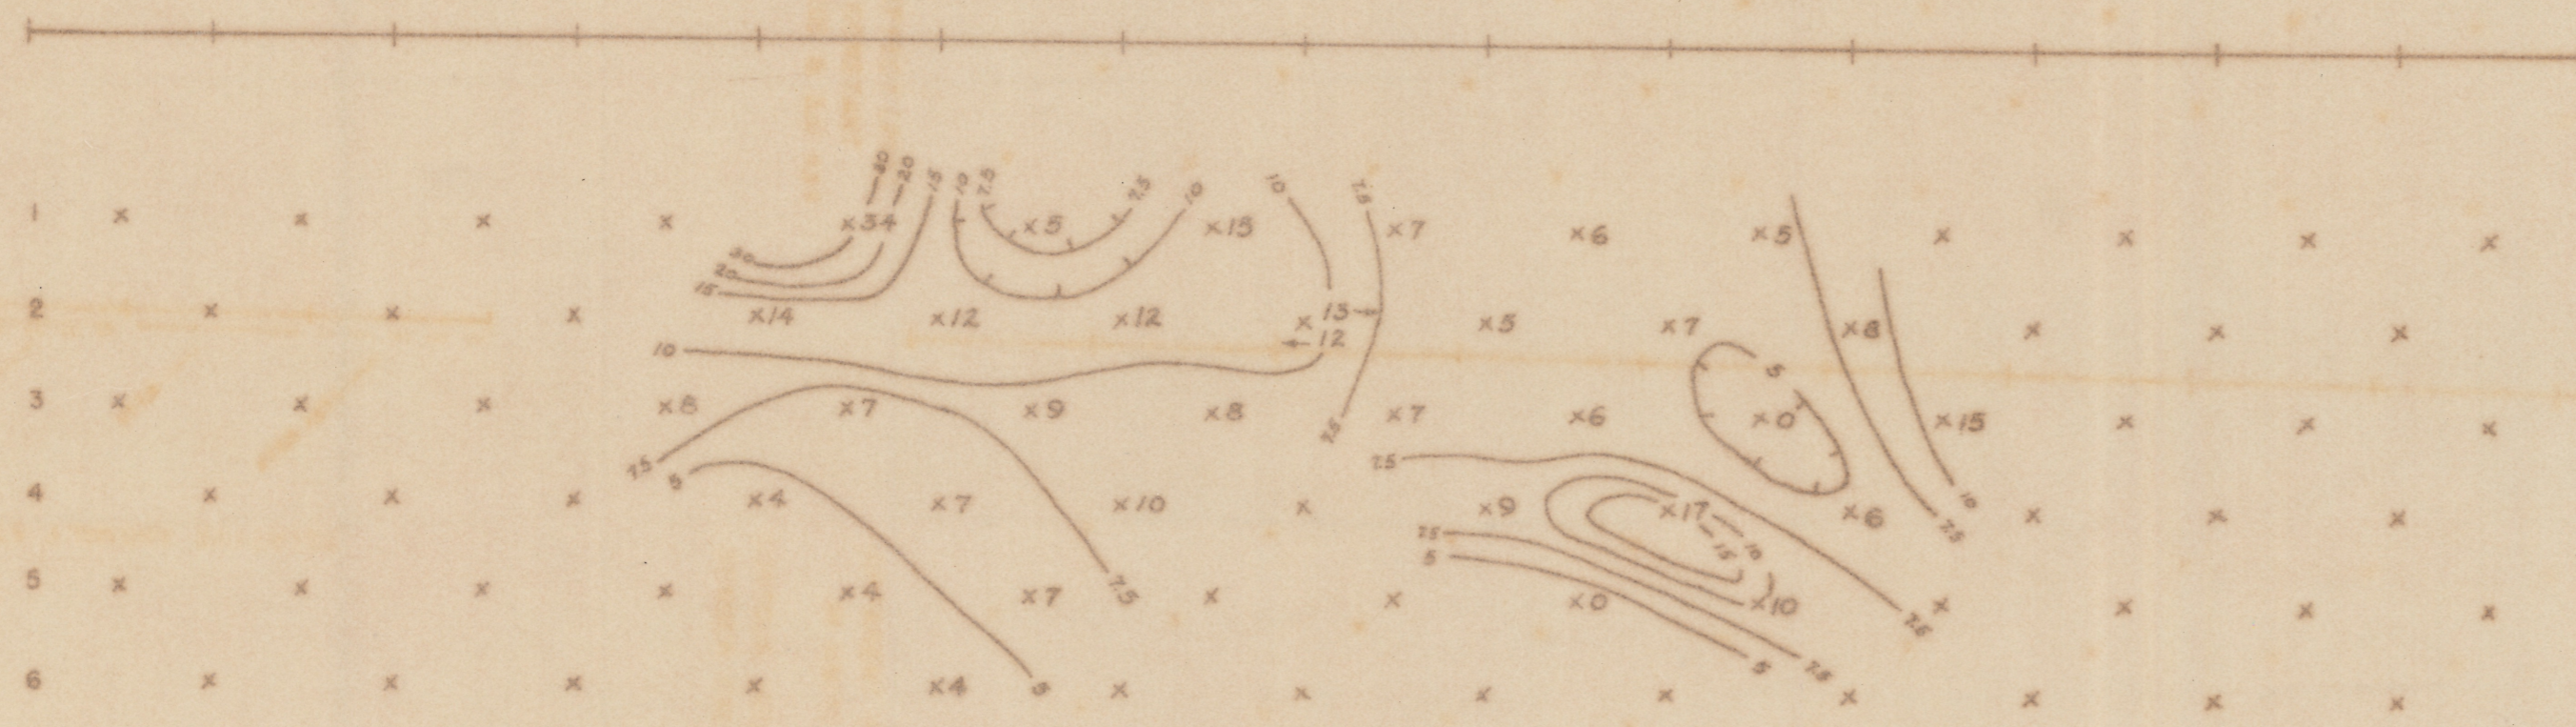

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
(MCF =  $\frac{PFE \times 1,000}{\rho_{DC}}$ )  
CONTOUR INTERVAL LOGARITHMIC

SECTIONAL DATA SHEET  
LINE No. 1  
INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY  
SCALE: 1"=500' DATE: MARCH 1964

FOR  
THE  
SUPERIOR OIL COMPANY  
MINERALS DIVISION

S.G. CLAIMS AREA  
PATAGONIA DISTRICT  
SANTA CRUZ COUNTY  
ARIZONA