



EXPLANATION

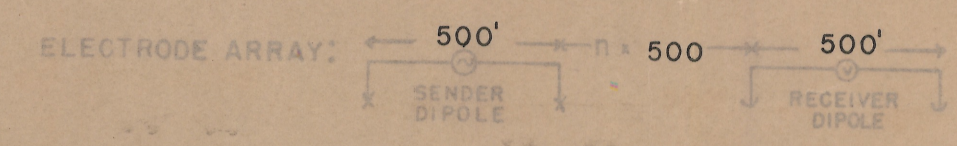

RELATIVE ANOMALY STRENGTH

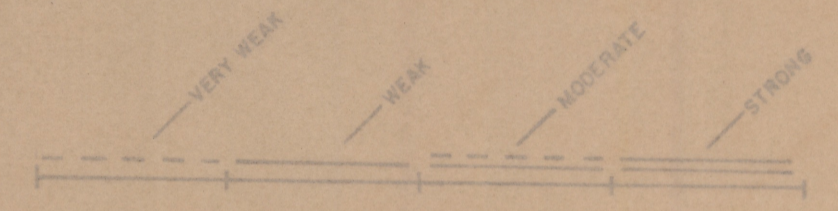

APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 cps

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 cps

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
($MCF = \frac{PFE \times 1000}{\rho_{DC}}$)
CONTOUR INTERVAL LOGARITHMIC

SECTIONAL DATA SHEET

LINE No. 1

INDUCED POLARIZATION TRAVERSE

HEINRICH'S GEOEXPLORATION COMPANY
SCALE: 1" = 500' DATE: MARCH 1964

FOR
THE
SUPERIOR OIL COMPANY
MINERALS DIVISION

S.G. CLAIMS AREA
PATAGONIA DISTRICT
SANTA CRUZ COUNTY
ARIZONA