



APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.10 c.p.s.



EXPLANATION

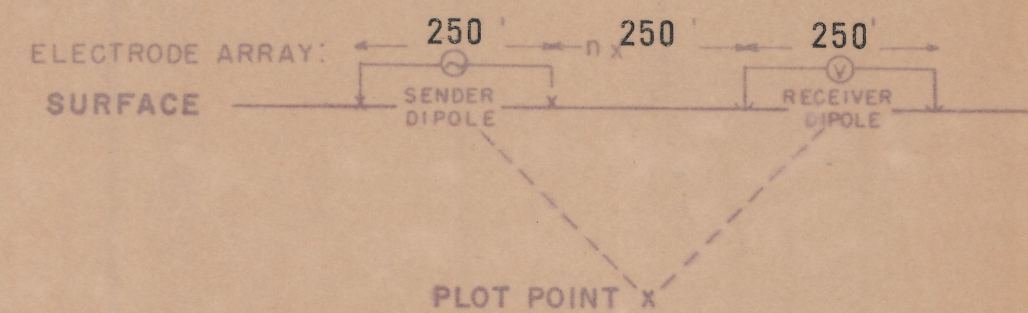


RELATIVE ANOMALY STRENGTH

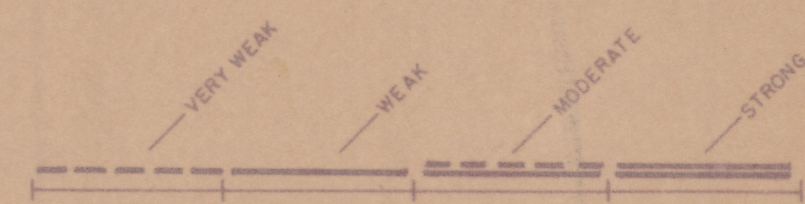

LOOKING WEST

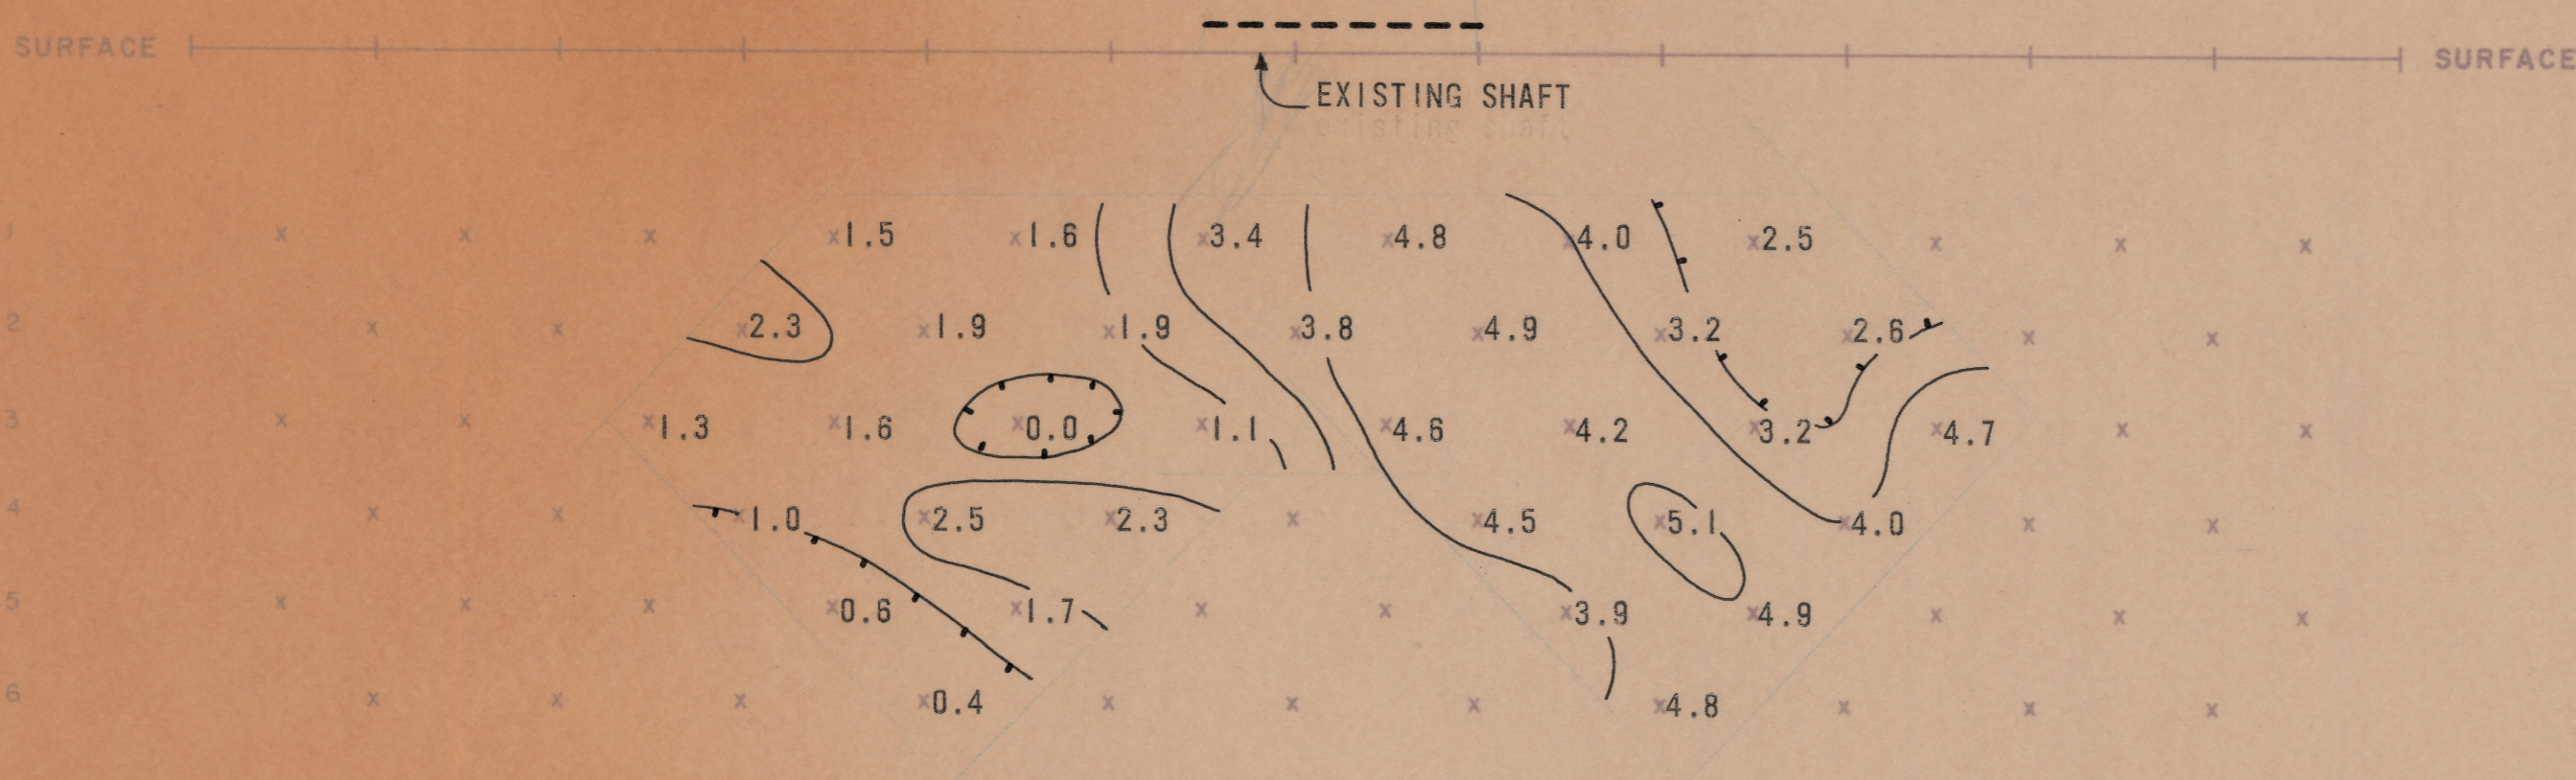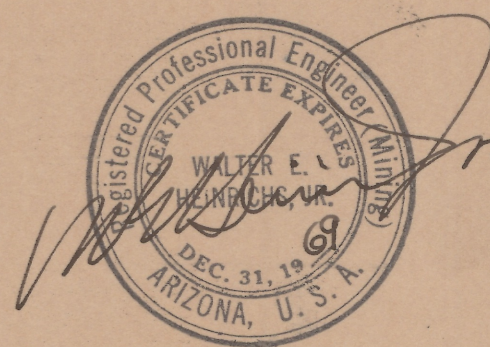


PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.10 & 3.0 c.p.s.

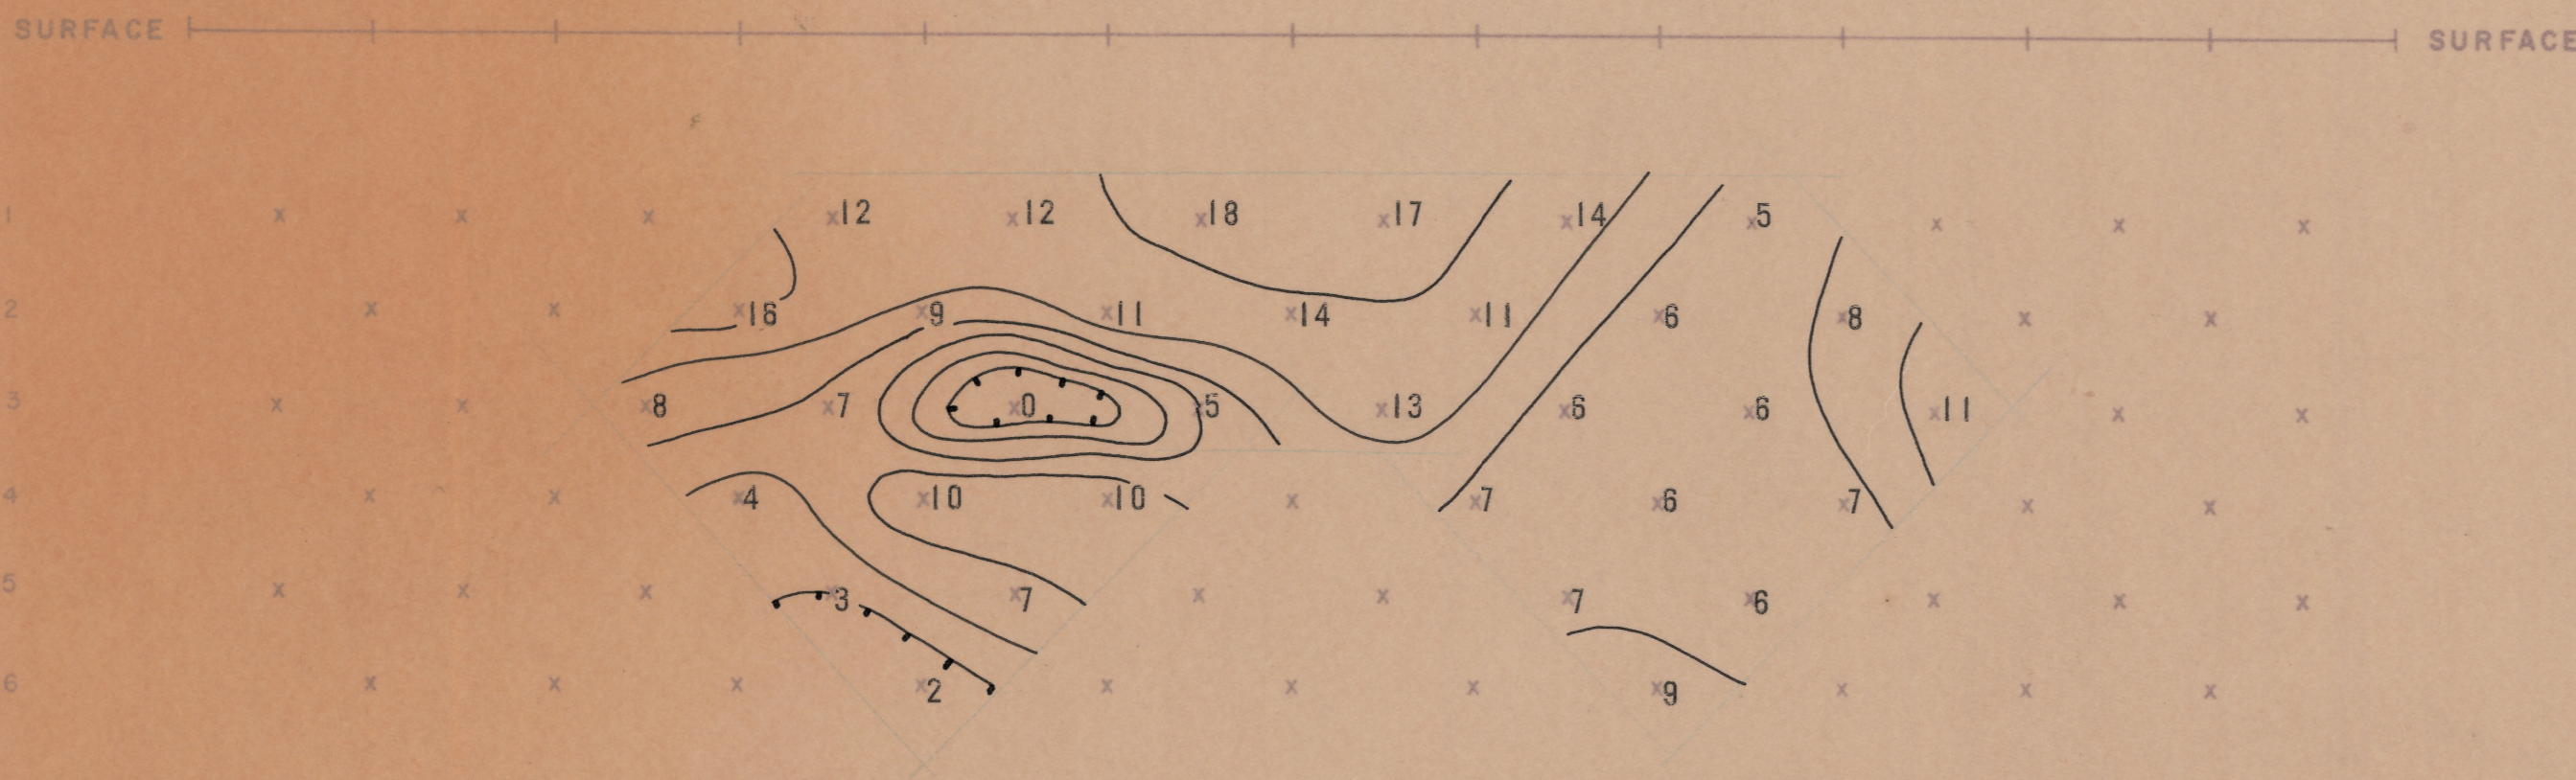

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
($MCF = \frac{\rho_{DC}}{PFE \times 1000}$)
CONTOUR INTERVAL LOGARITHMIC

DIXIE MINE AREA
SECTIONAL DATA SHEET
LINE NO. 1 (SPREAD 1)
INDUCED POLARIZATION TRAVERSE
HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 250' DATE: JAN 1969
FOR
NORTH AMERICAN MINES INC.

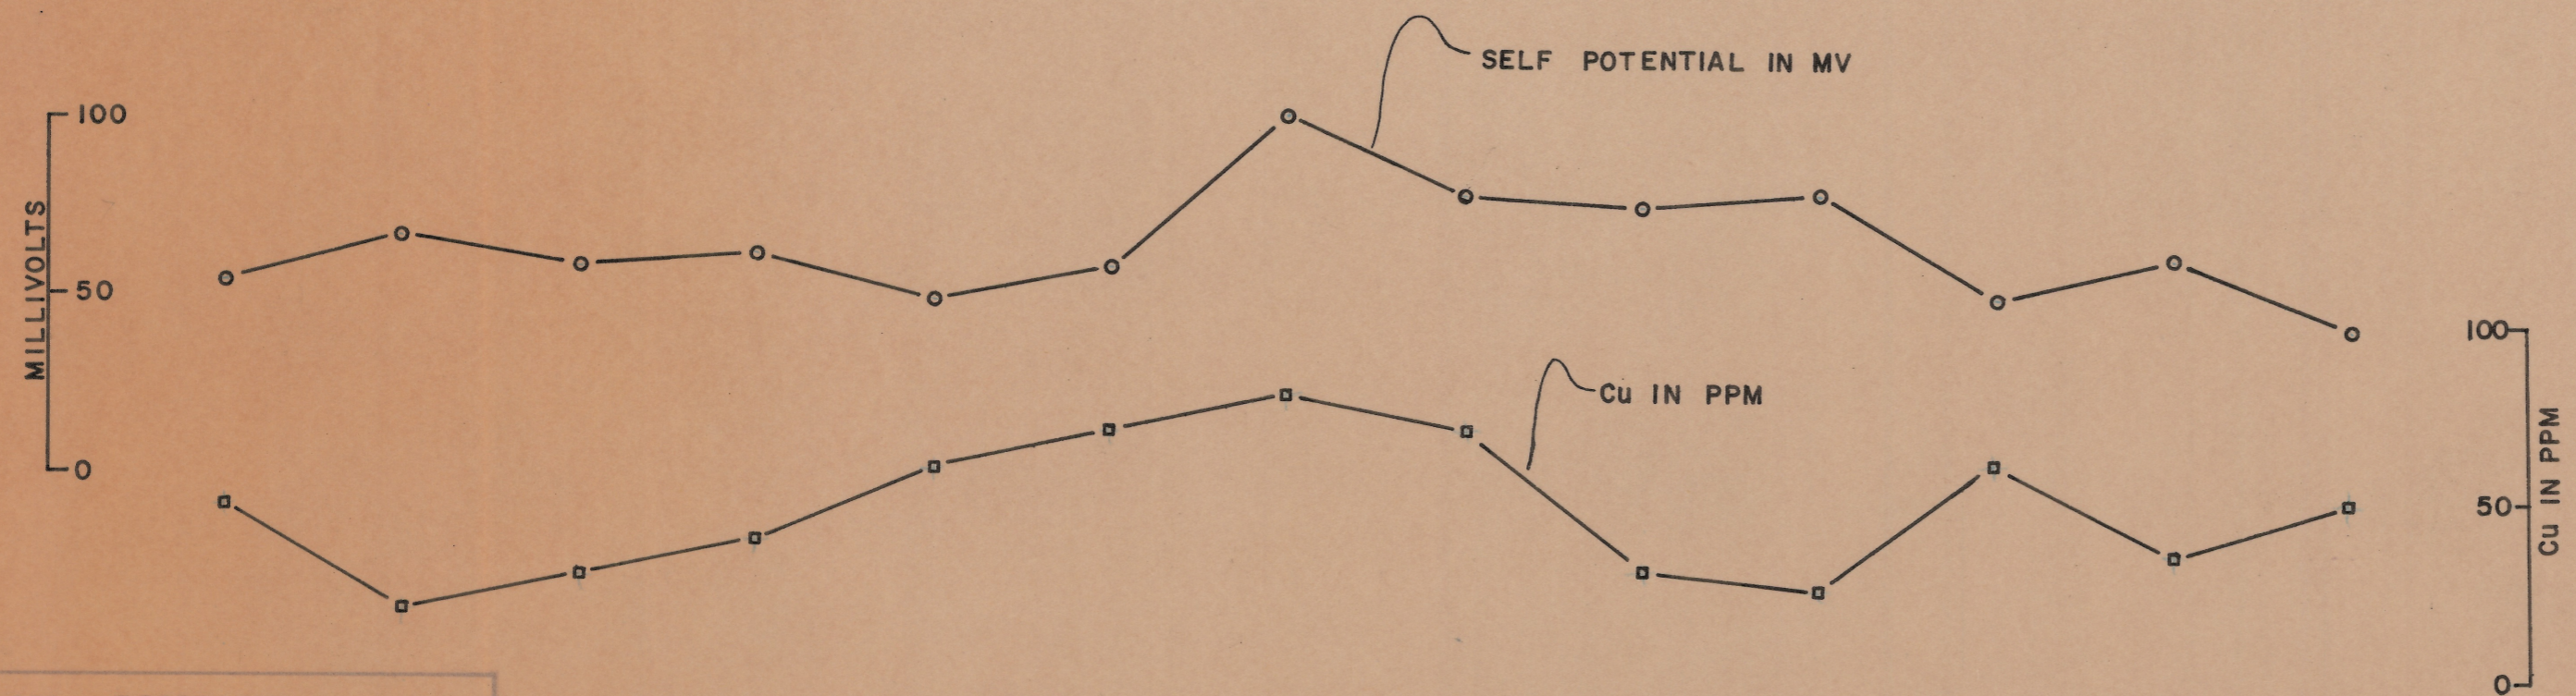

4510-110-80-507 MP 30 damaged