



APPARENT RESISTIVITY ( $\rho_{DC}$ )  
IN UNITS OF OHM FEET (2T)  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 C.P.S.


EXPLANATION

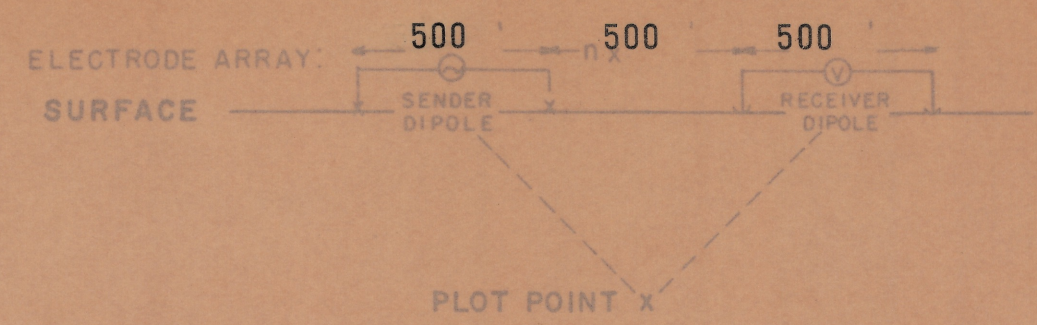

RELATIVE ANOMALY STRENGTH

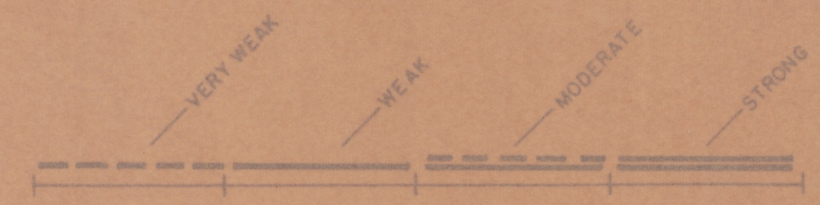

LOOKING NORTH

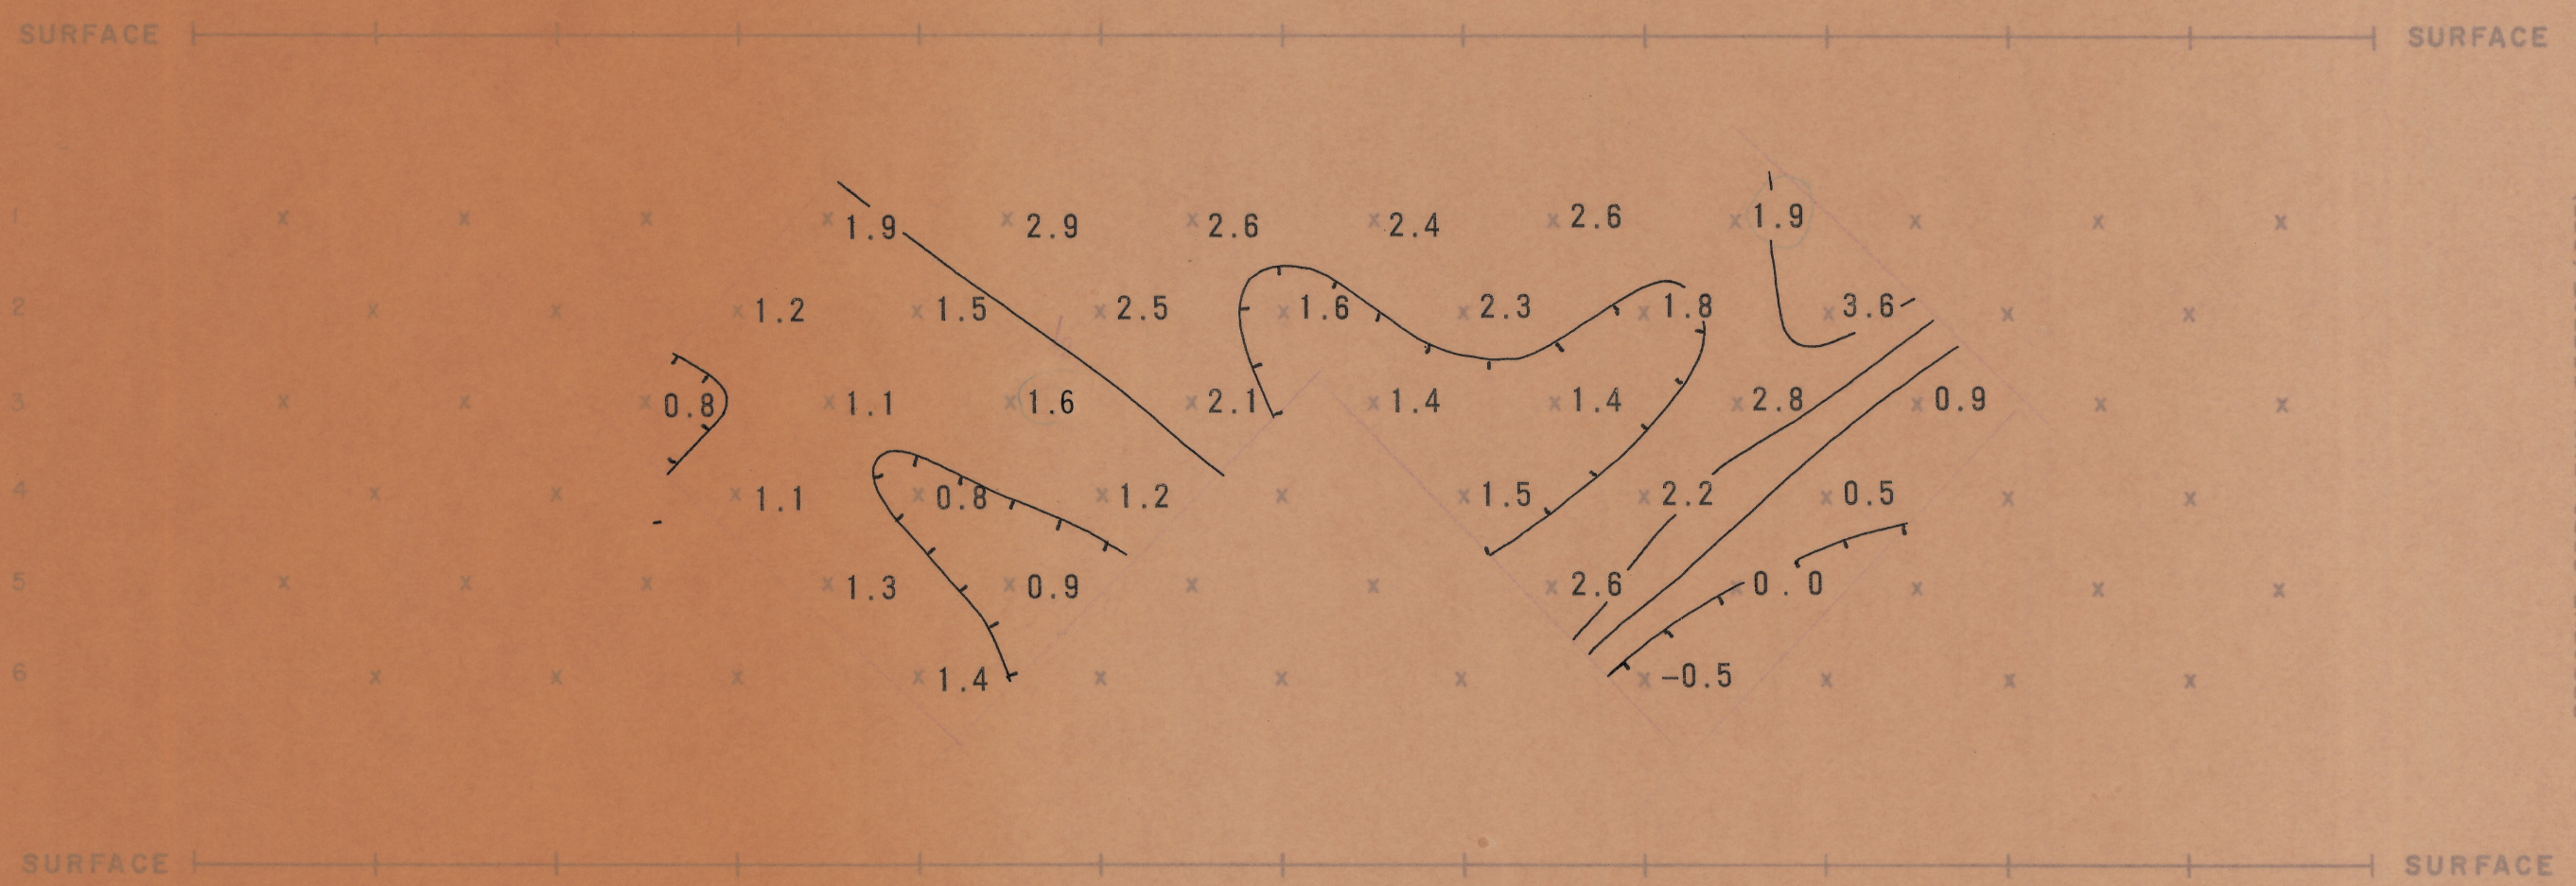

PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 3.0 C.P.S.

RECUERDO CLAIM GROUP AREA

SECTIONAL DATA SHEET

LINE NO. 1

INDUCED POLARIZATION TRAVERSE


HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 500'

DATE: NOV 1967


FOR

NORTH AMERICAN MINES, INC.

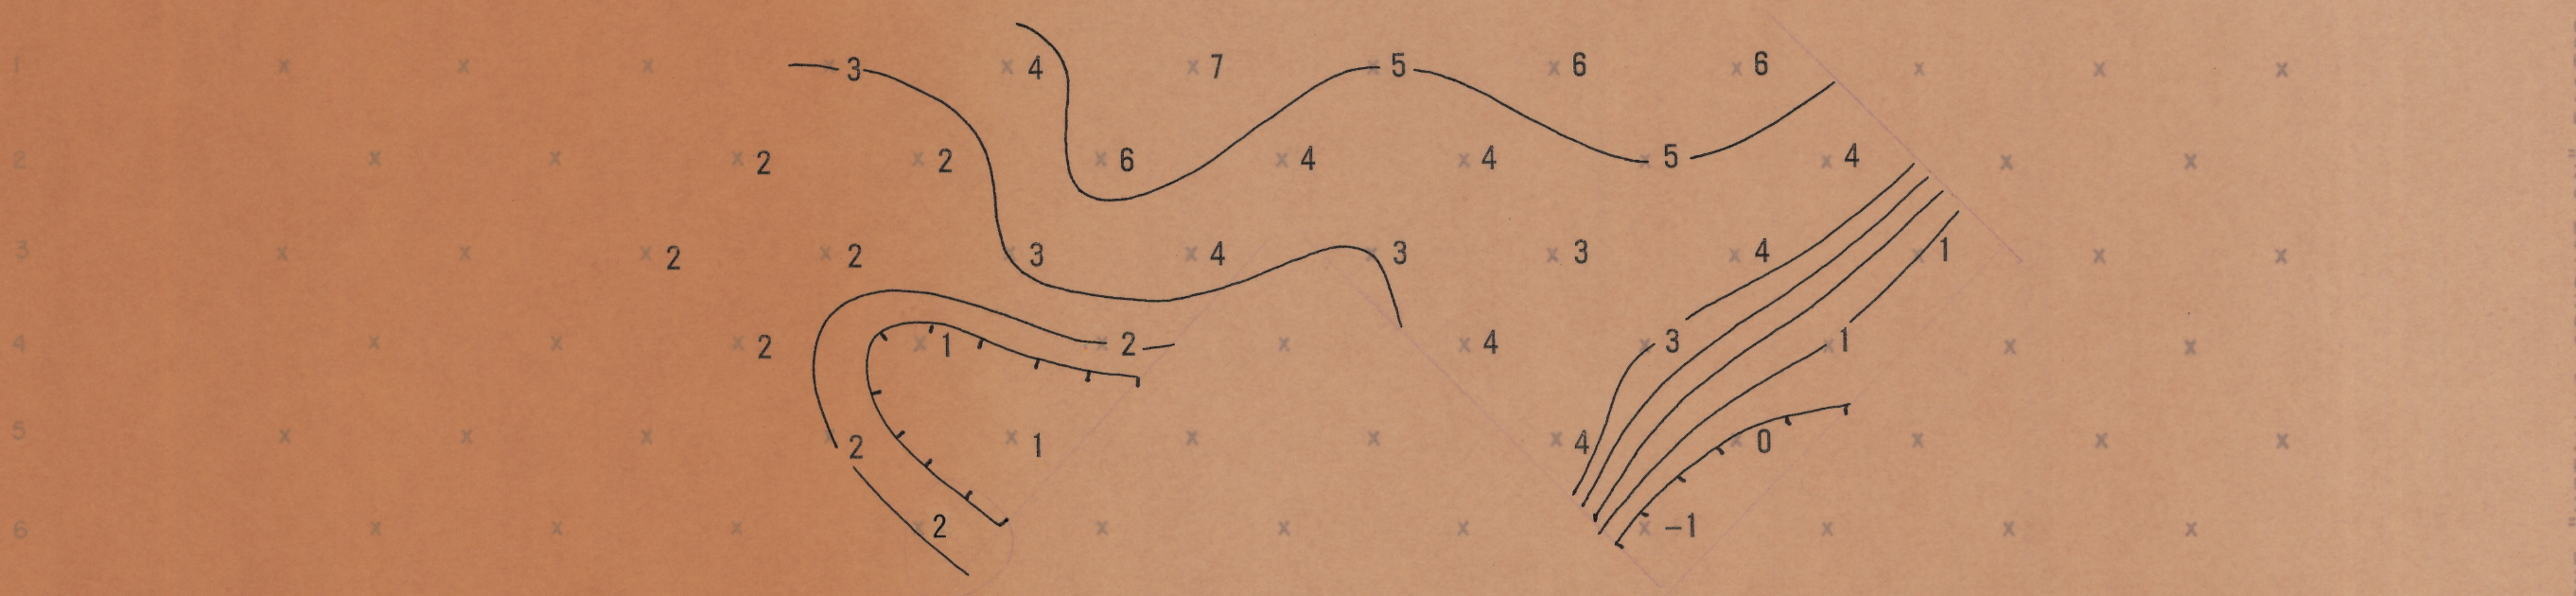

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
( $MCF = \frac{PFE \times 1000}{\rho_{DC} \times 2T}$ )  
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

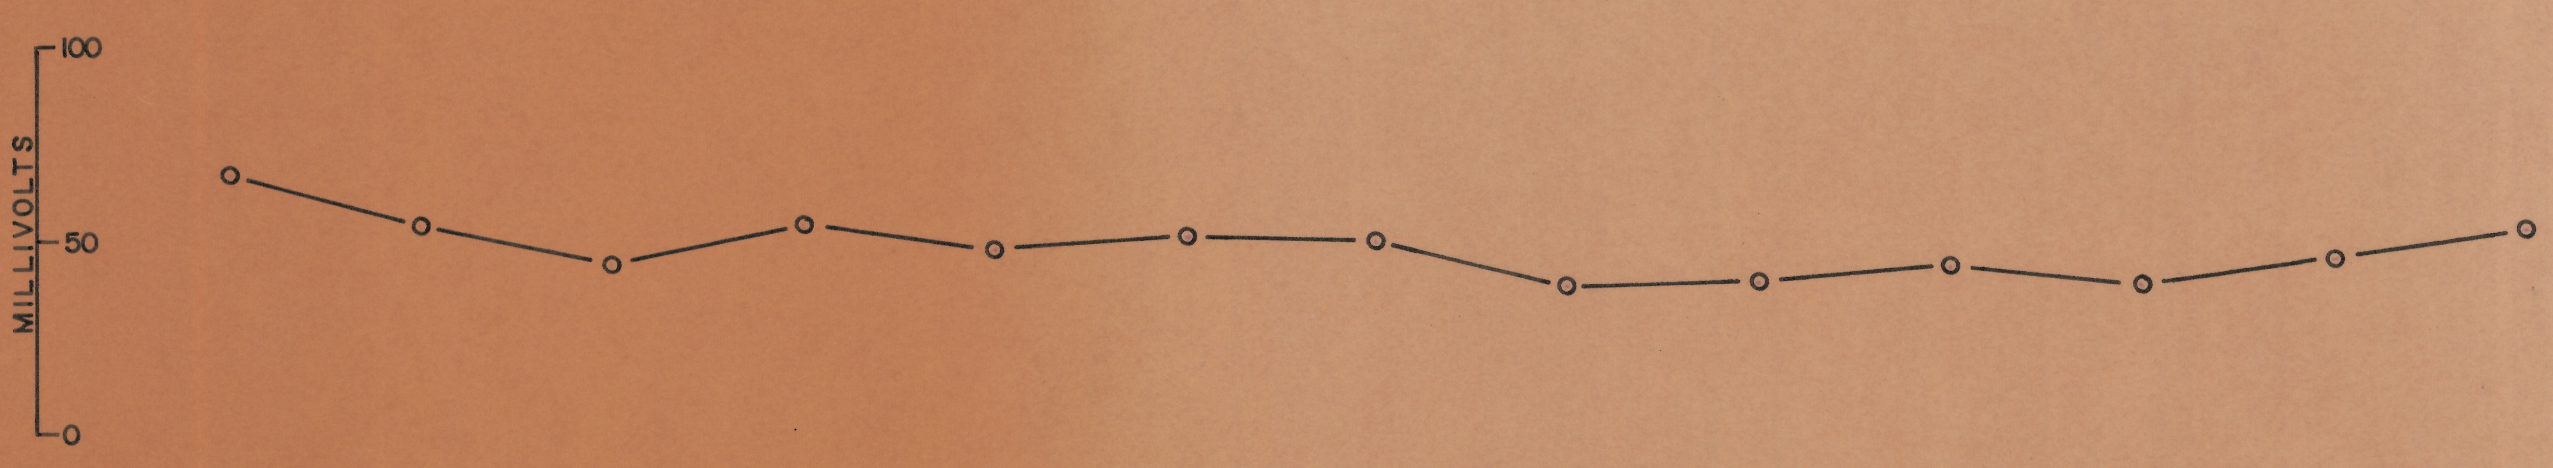

0210-10-08-50 475 50 4250007