



APPARENT RESISTIVITY (ρ_a)
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY 0.05 CDS

EXPLANATION

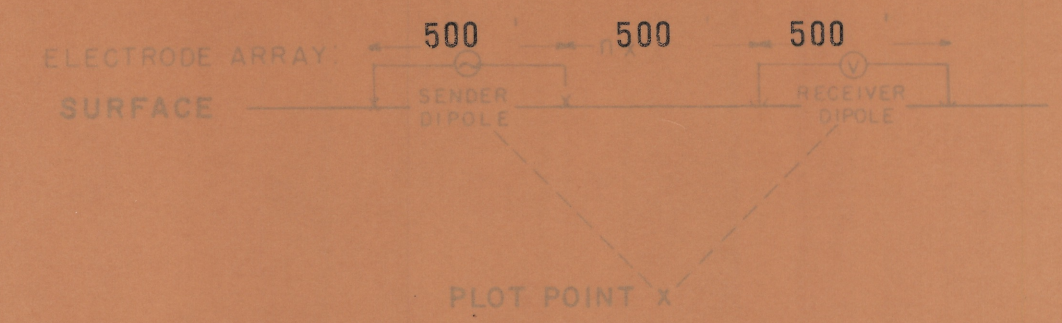

RELATIVE ANOMALY STRENGTH

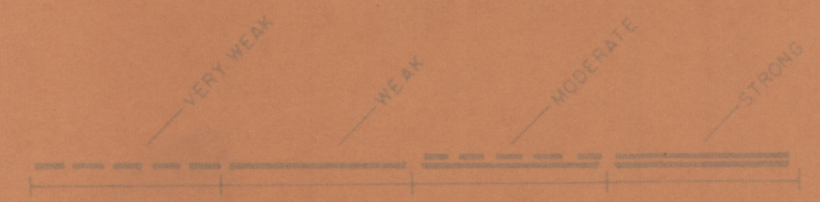

LOOKING N48°E

LAZY 3 AREA.

SECTIONAL DATA SHEET

LINE NO. 2


INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY


SCALE: 1" = 500' DATE: NOV 1967

FOR

NORTH AMERICAN MINES, INC

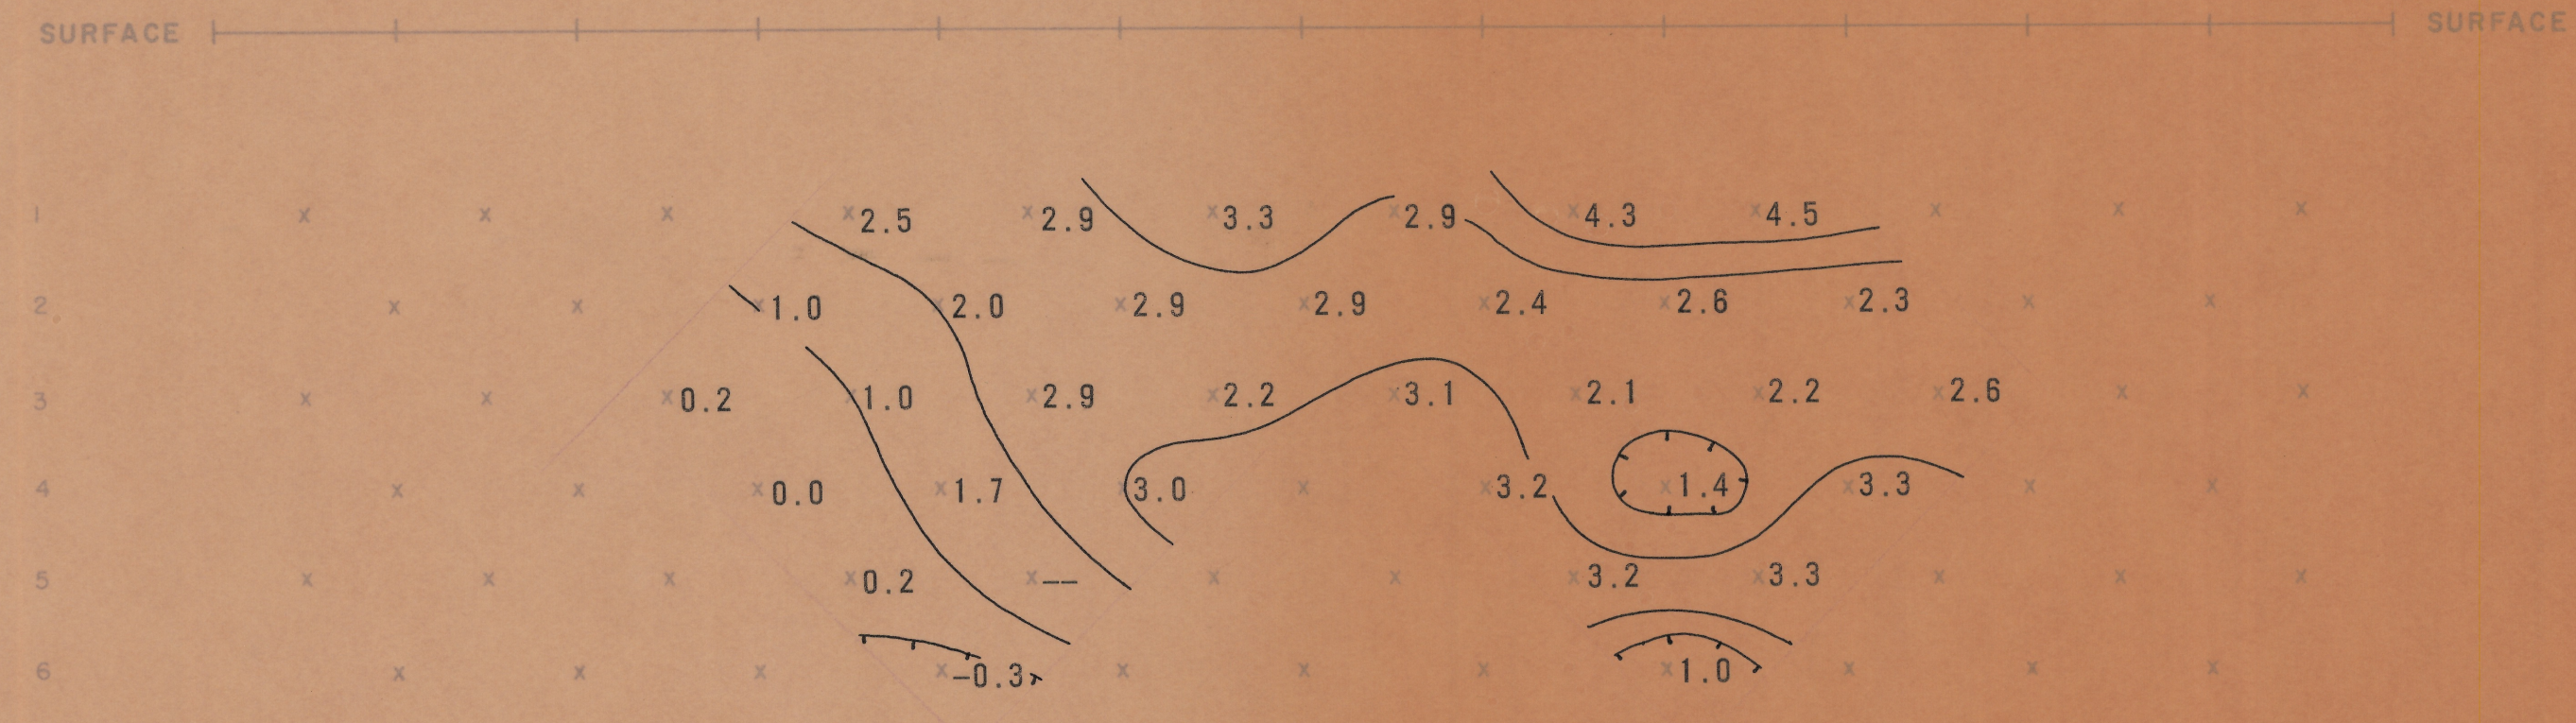


PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES 0.05 & 3.0 CDS

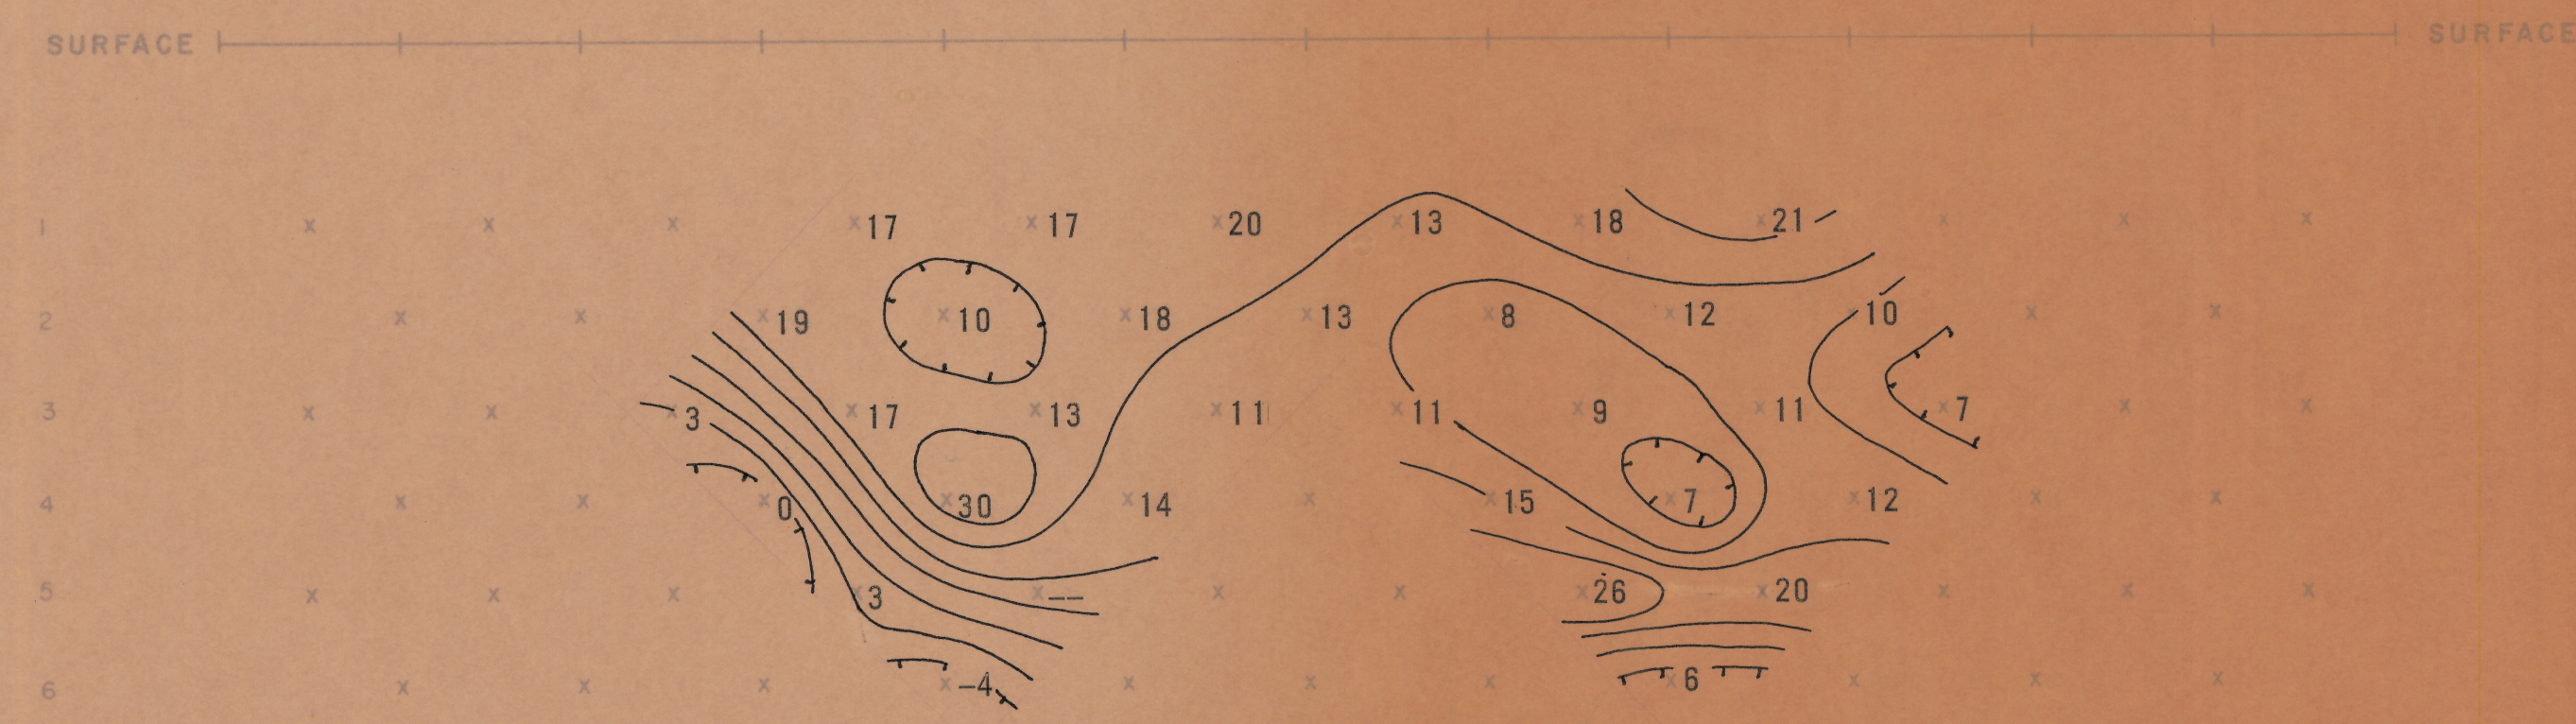

APPARENT METALLIC CONDUCTIVITY FACTOR (MCF)
IN UNITS OF 1000
(MCF = $\frac{1000}{\rho_a}$)
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

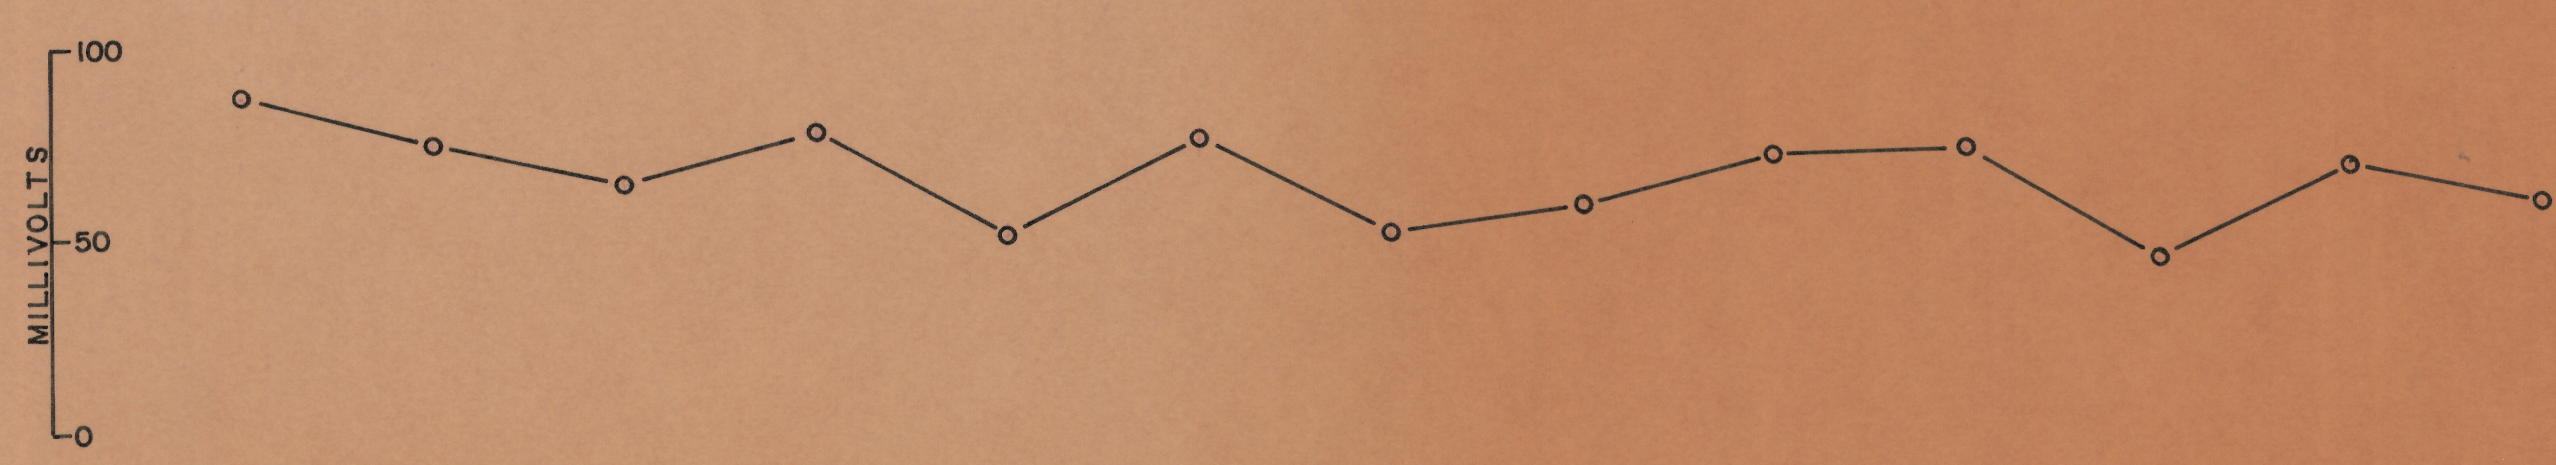

Scanned by City of Tucson - 11/11/2017