



ELECTRODE SURFACE STATIONS 30S 25 20 15 10 5 0-N/S 5 10 15 20 25 30N SURFACE

Δ INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

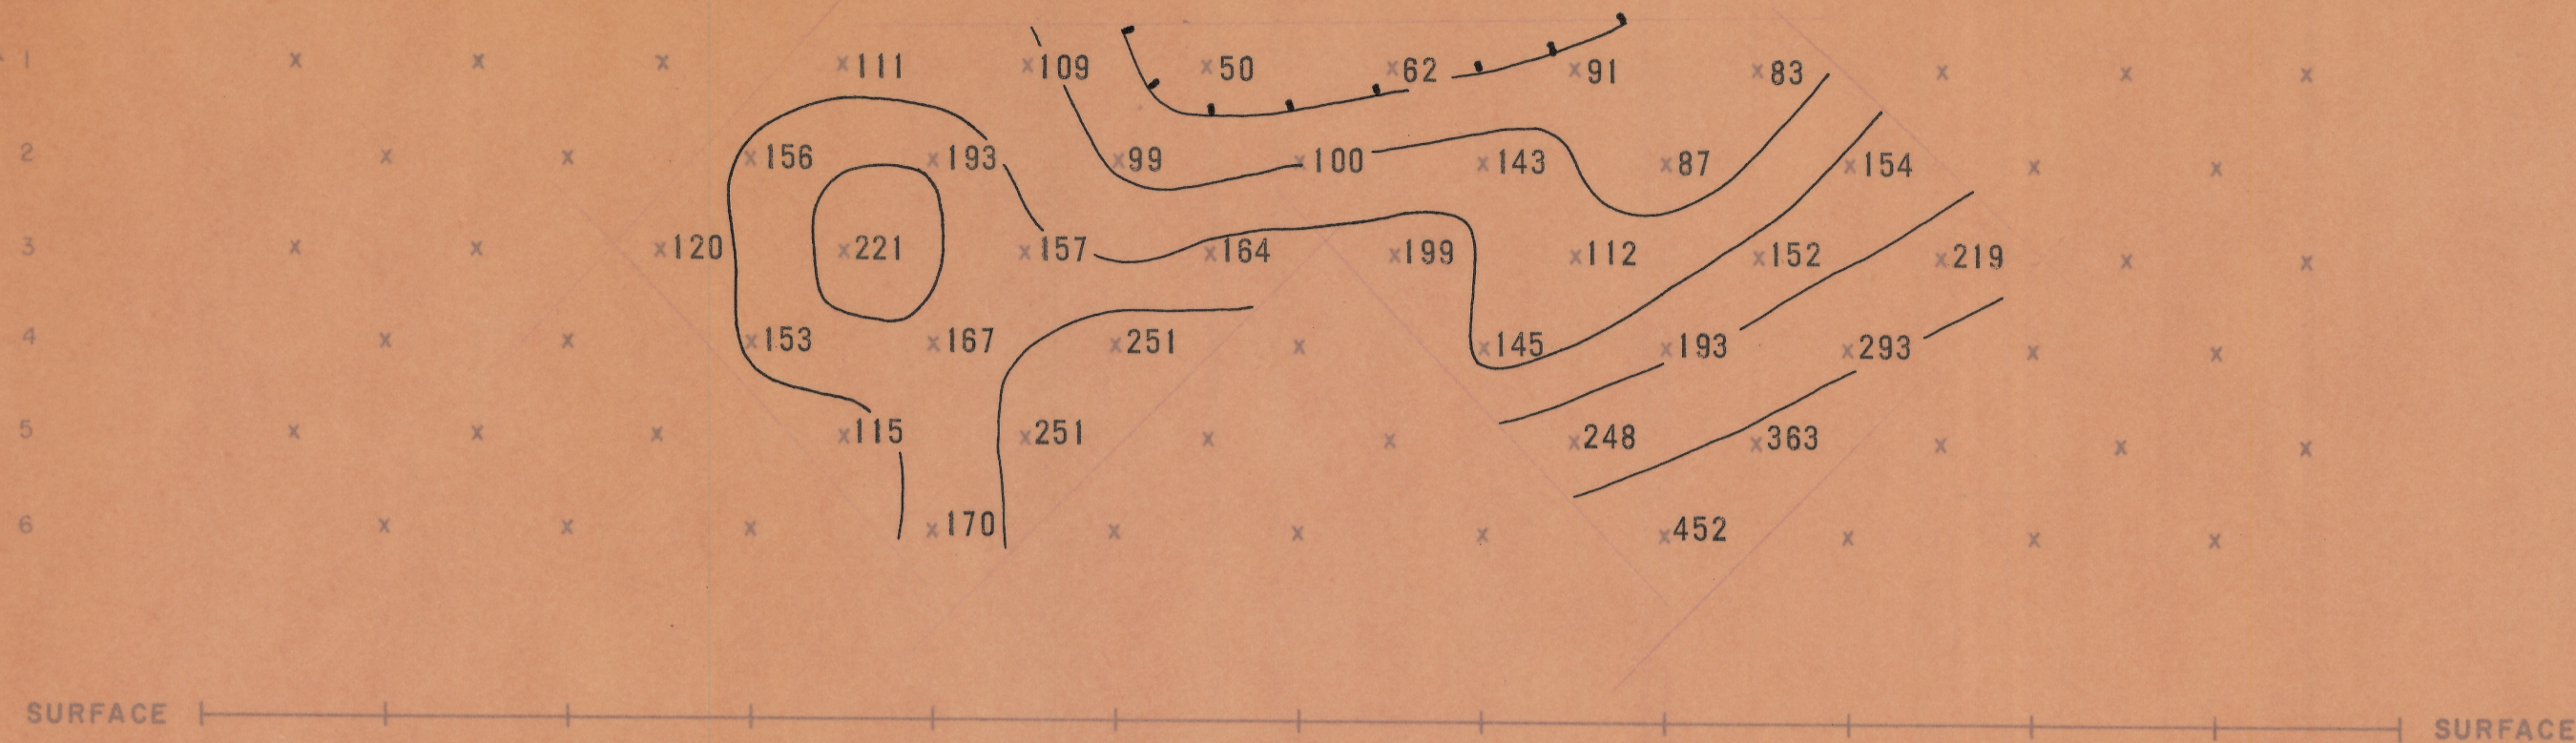


APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 C.P.S.

EXPLANATION




PLOT POINT X

RELATIVE ANOMALY STRENGTH

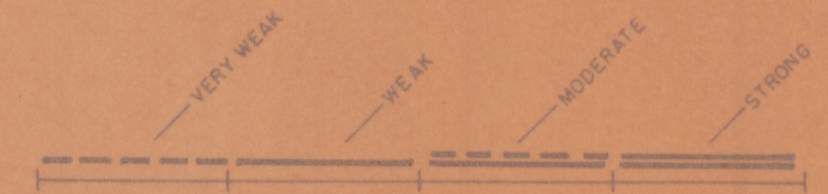

LOOKING WEST

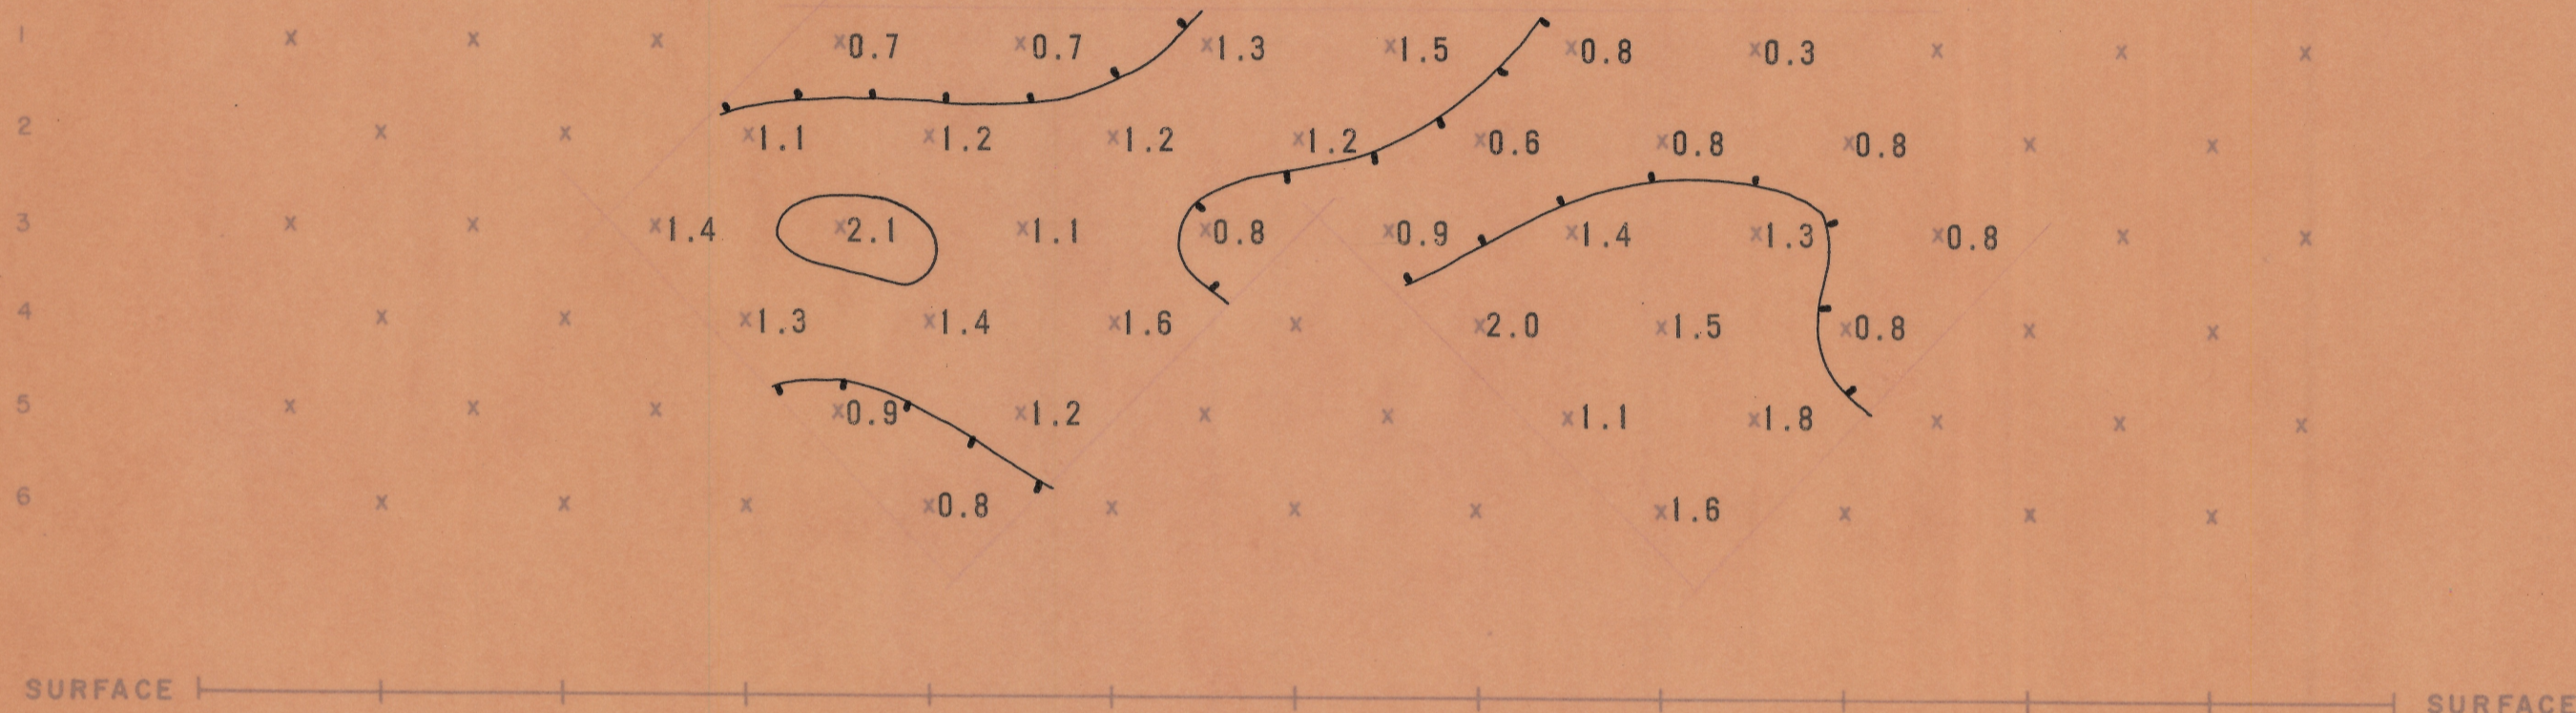

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 C.P.S.

OLD GRAND DAD MINE

SECTIONAL DATA SHEET

LINE NO. 2


INDUCED POLARIZATION TRAVERSE

HEINRICH'S GEOEXPLORATION COMPANY

SCALE: 1" = 500' DATE: APR 1968


FOR

OLD GRAND DAD MINING CO.

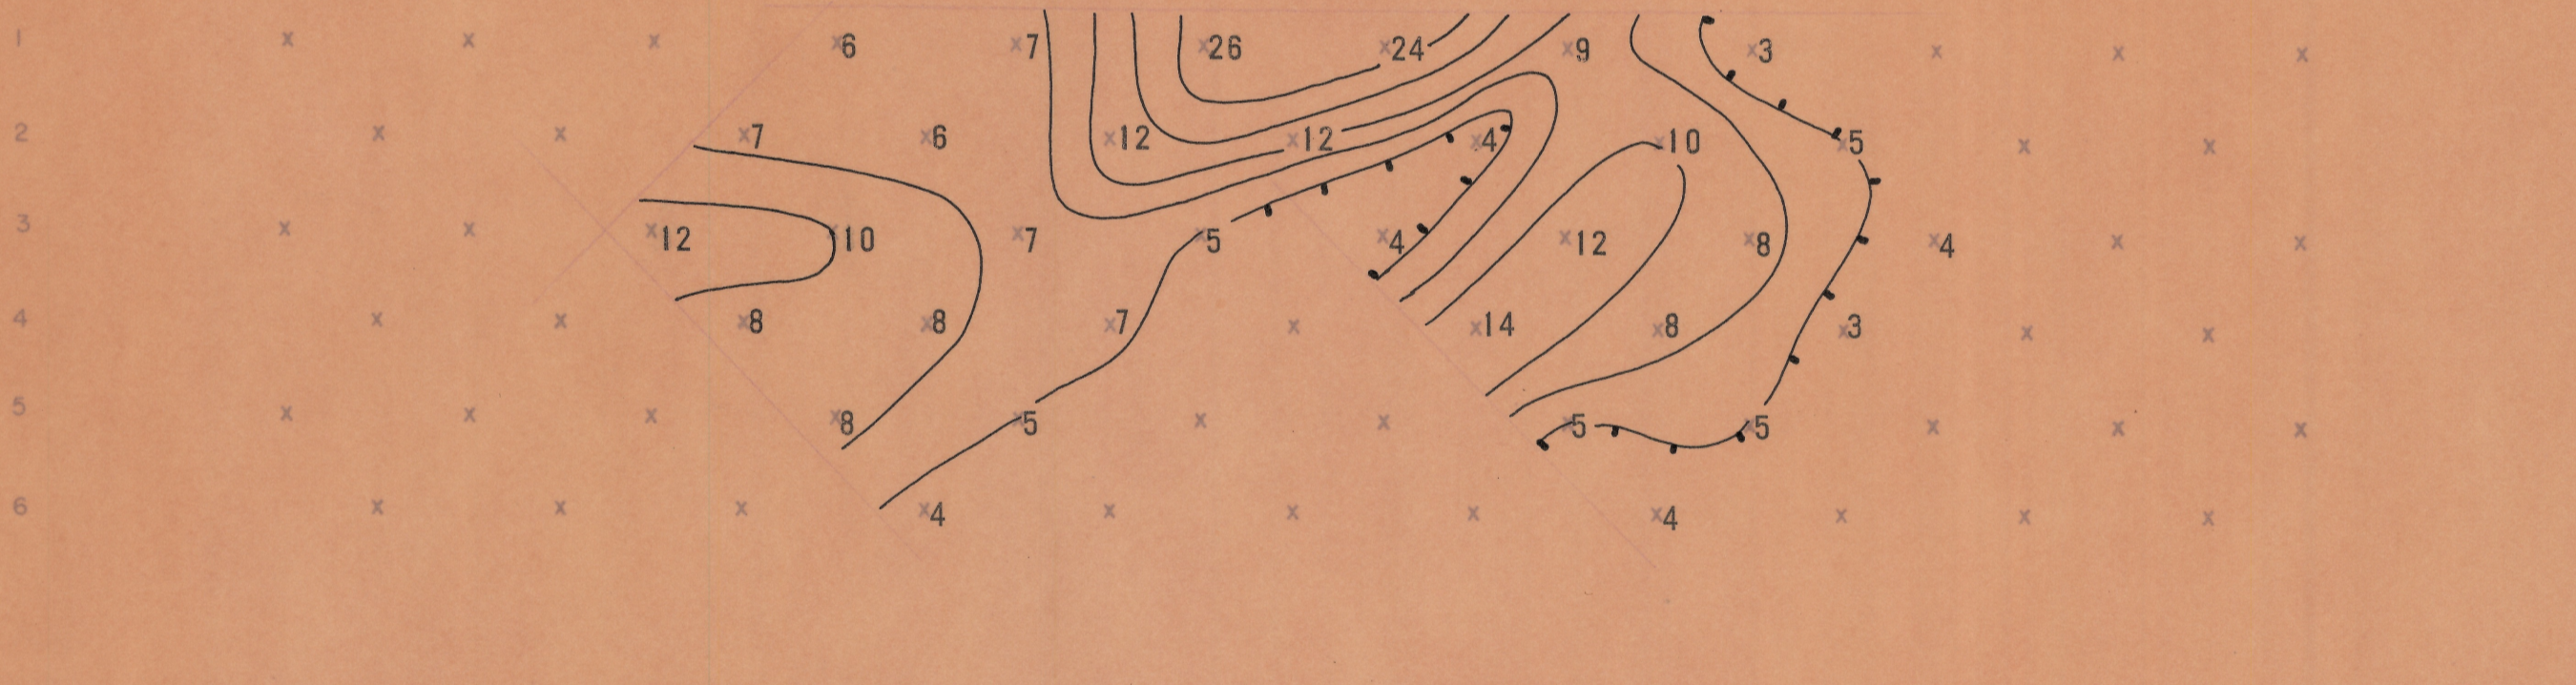

APPARENT "METALLIC CONDUCTION" FACTOR (MCF) $(MCF = \frac{PFE \times 1000}{\rho_{DC}})$ CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

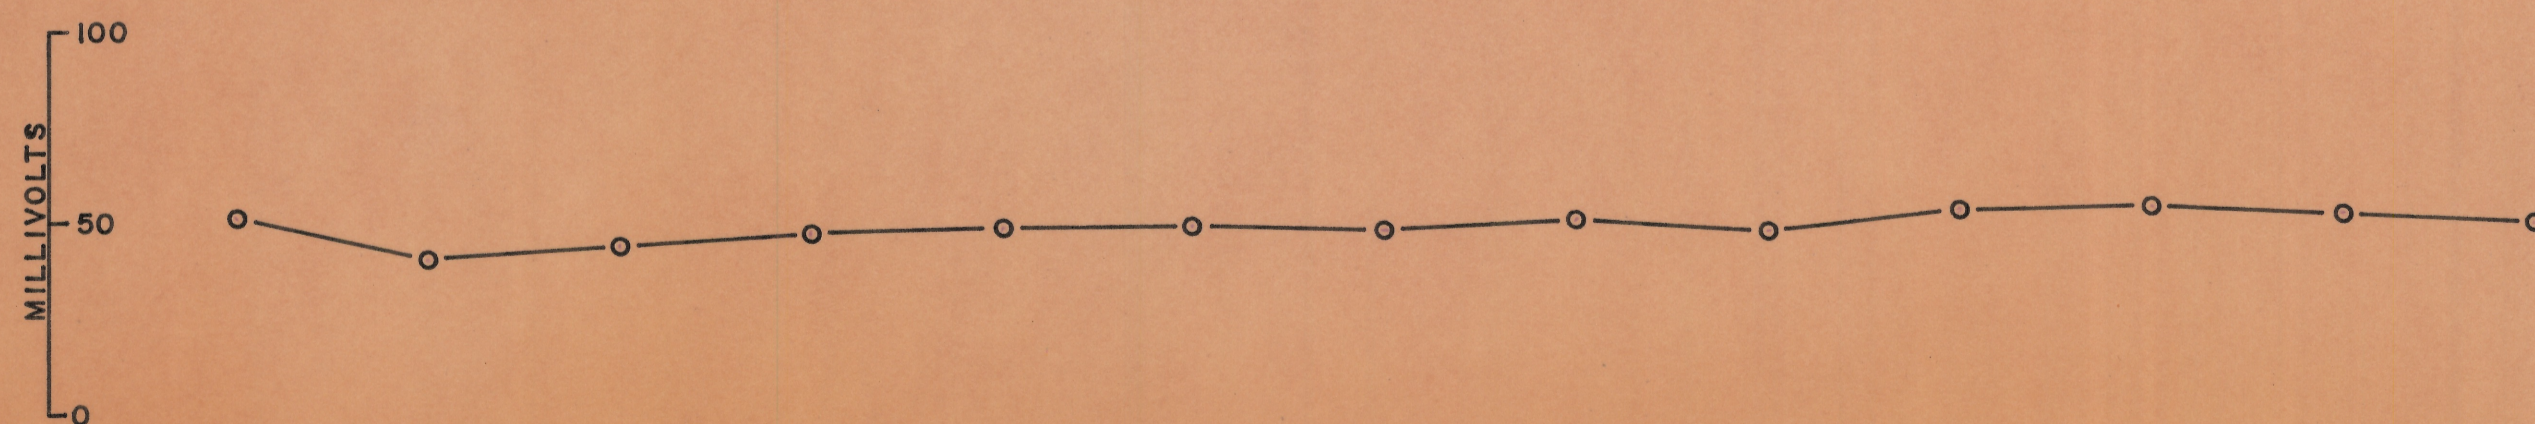

Checked by B.S. 2/14 705-08-01-0145