
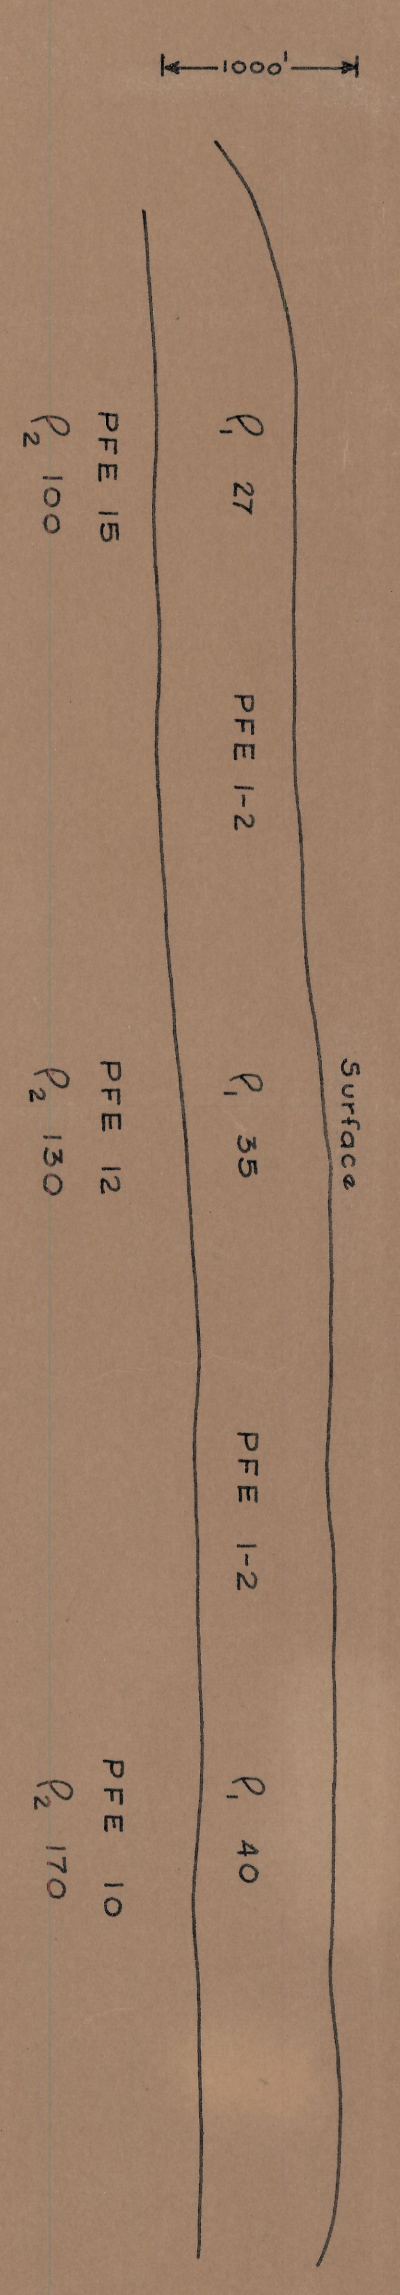
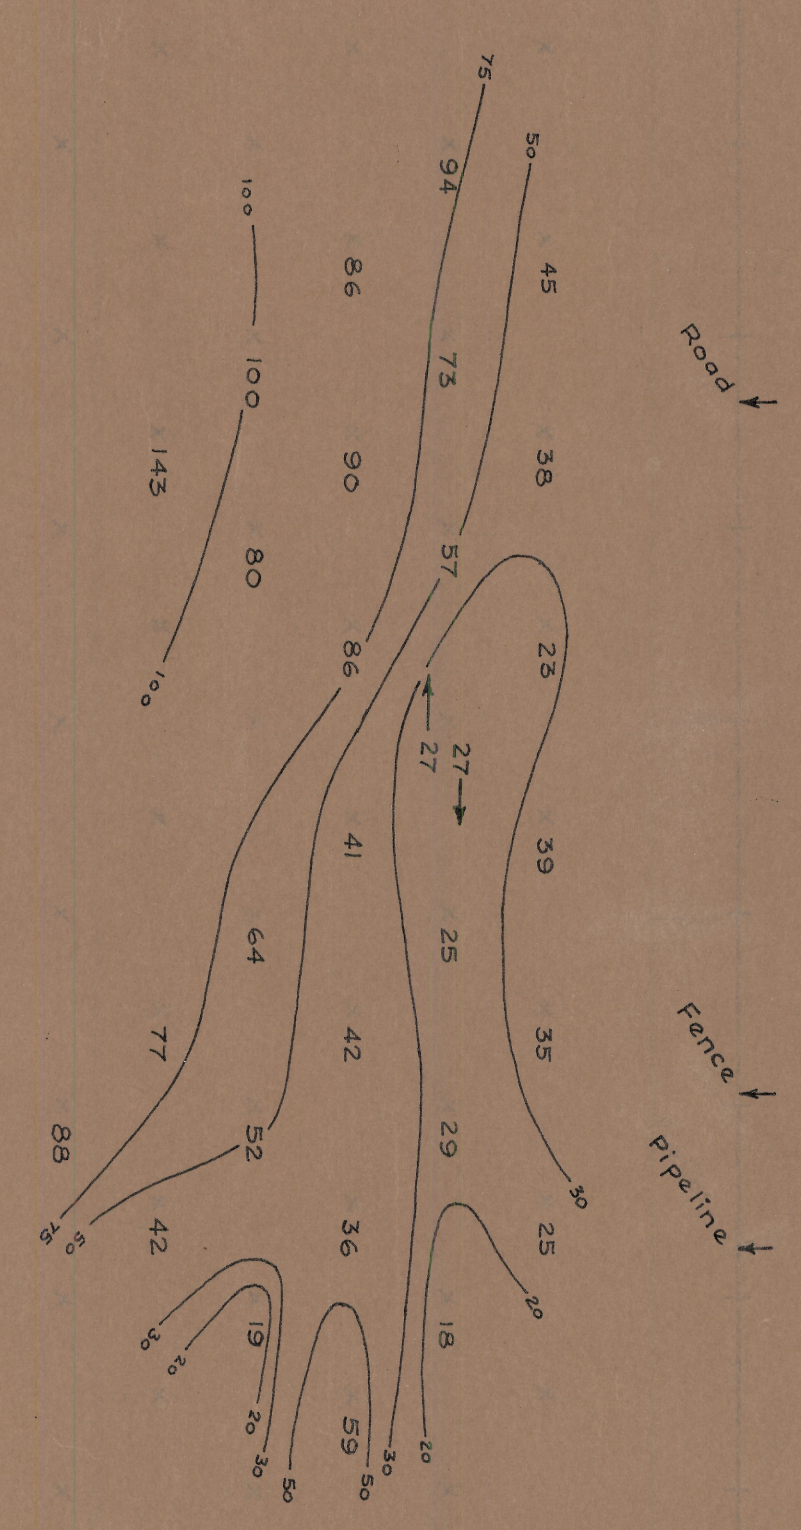
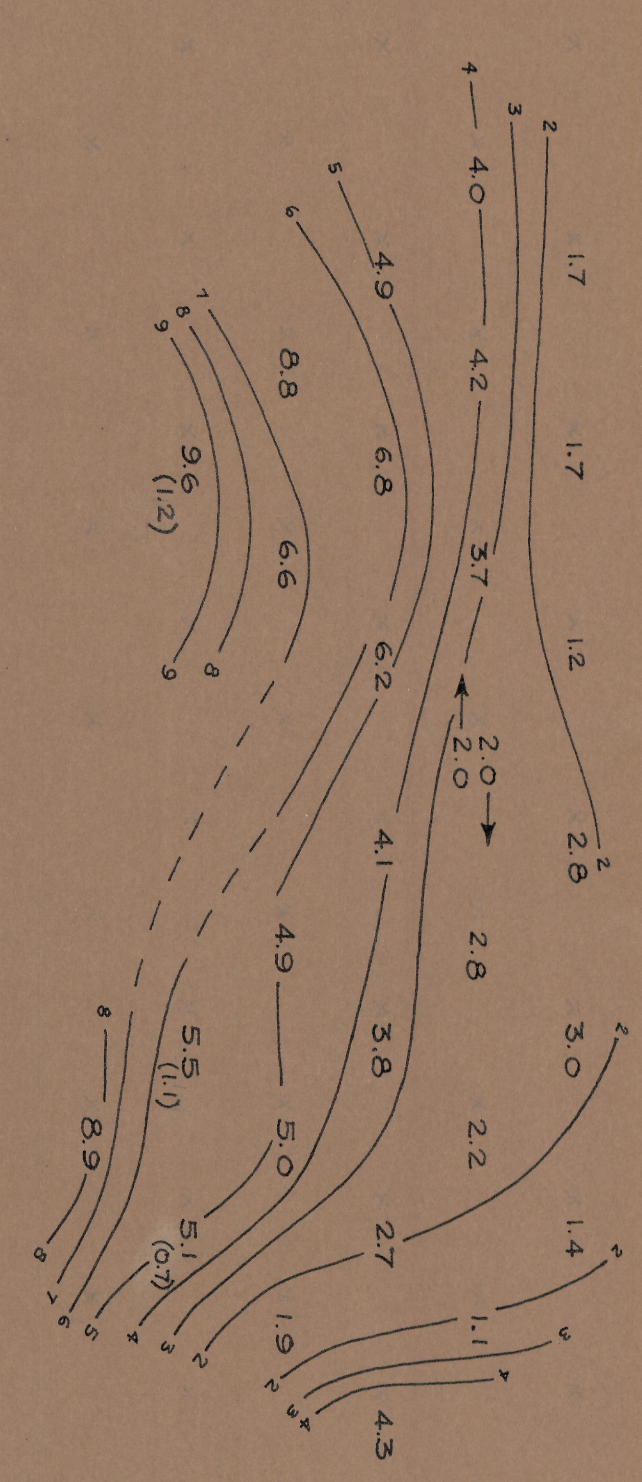


ELECTRODES  
STATIONS  
CONTOUR INTERVAL BETWEEN  
SENDER & RECEIVER DIAPHS

5 OW 4 OW 3 OW 2 OW 1 OW 0 1 OE 2 OE 3 OE 4 OE 5 OE 6 OE

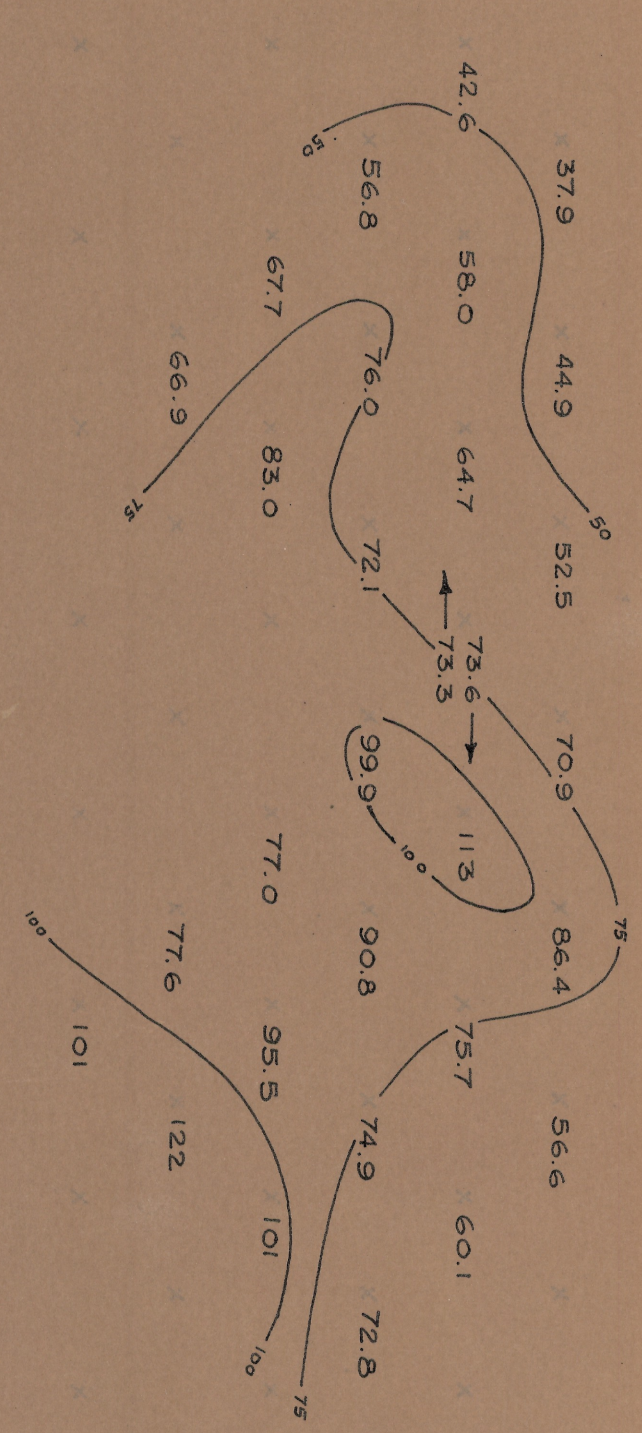


APPARENT RESISTIVITY  $\sqrt{DC}$   
IN UNITS OF OHM FEET  $\sqrt{2\pi}$

SENDER FREQUENCY: 1005 cps  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 1005 cps

APPARENT METALLIC CONDUCTION FACTOR (MCF)  
CONTOUR INTERVAL LOGARITHMIC

EXPLANATION

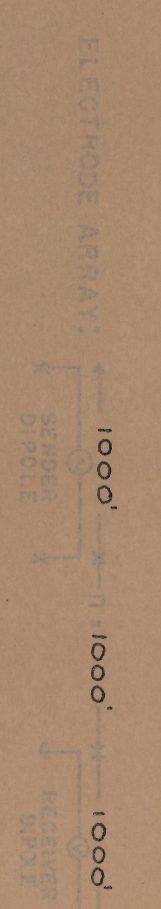

Subscripts on 5n PFE's refer to the Inductive coupling frequency effect (computation based on homogeneity).

BAGDAD EXTENSION PROJECT

SECTIONAL DATA SHEET

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE 1" = 1000'

DATE JULY 1964

FDX

NEWMONT EXPLORATION LTD.

Looking Northerly