
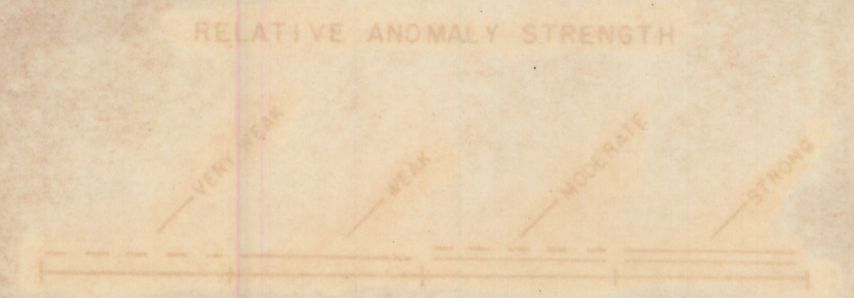


APPARENT RESISTIVITY (ρ_{DC} / 2π)
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 cps

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 cps

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
(MCF = PFE × 1000 / ρ_{DC} / 2π)
CONTOUR INTERVAL LOGARITHMIC

EXPLANATION

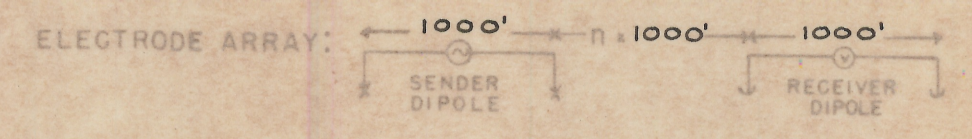

Subscripts on 5n PFE's refer to the inductive coupling frequency effect (computation based on homogeneity)

BAGDAD EXTENSION PROJECT

SECTIONAL DATA SHEET

LINE No. 2


INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000' DATE: JULY 1964

FOR

NEWMONT EXPLORATION LTD.

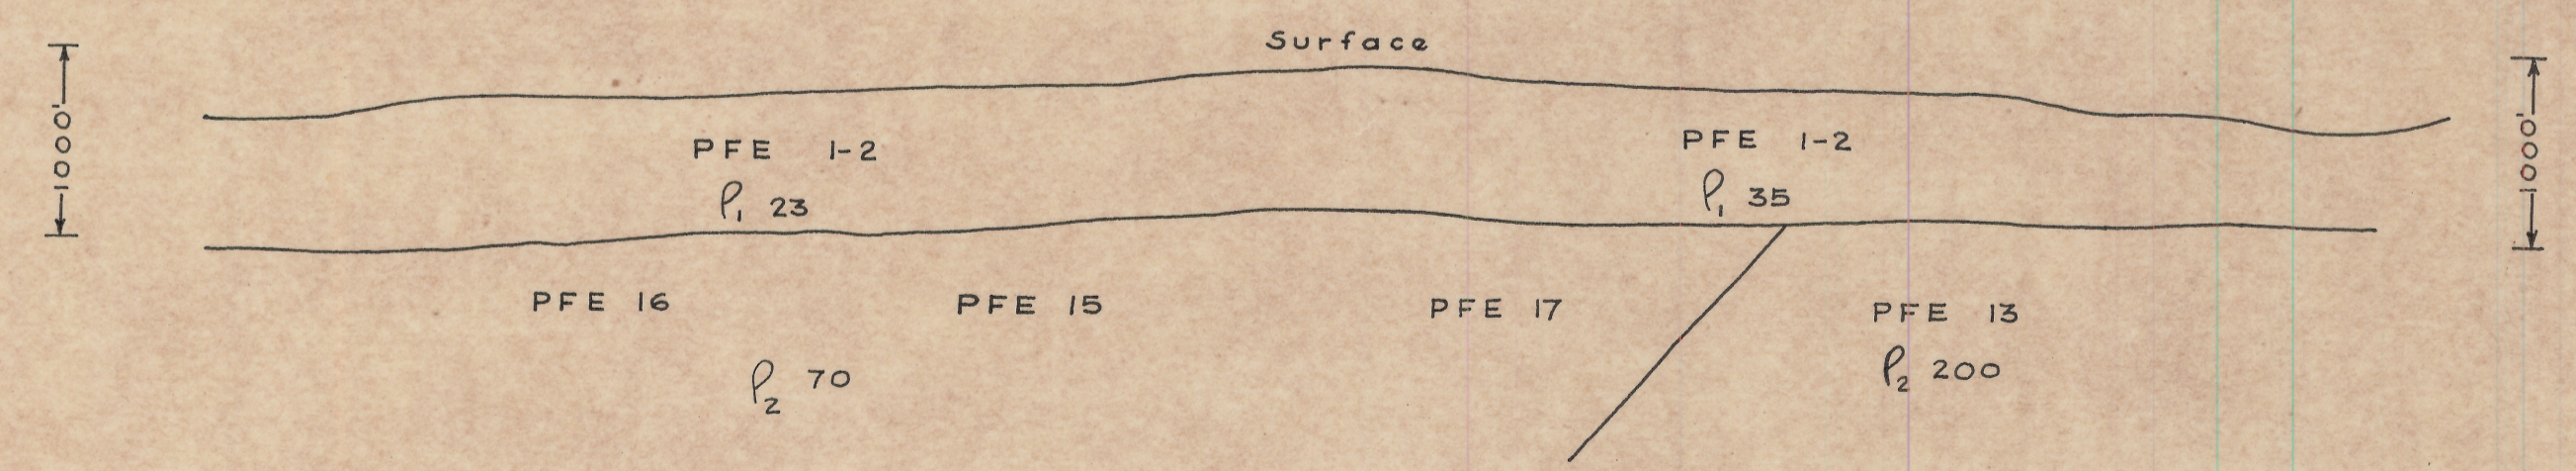

INTERPRETATION

Looking Northerly

SELF-POTENTIAL
SURFACE PROFILE
GEOLOGY, ETC.