



ELECTRODES STATIONS
 5.0S 4.0S 3.0S 2.0S 1.0S 0 1.0N 2.0N 3.0N 4.0N 5.0N

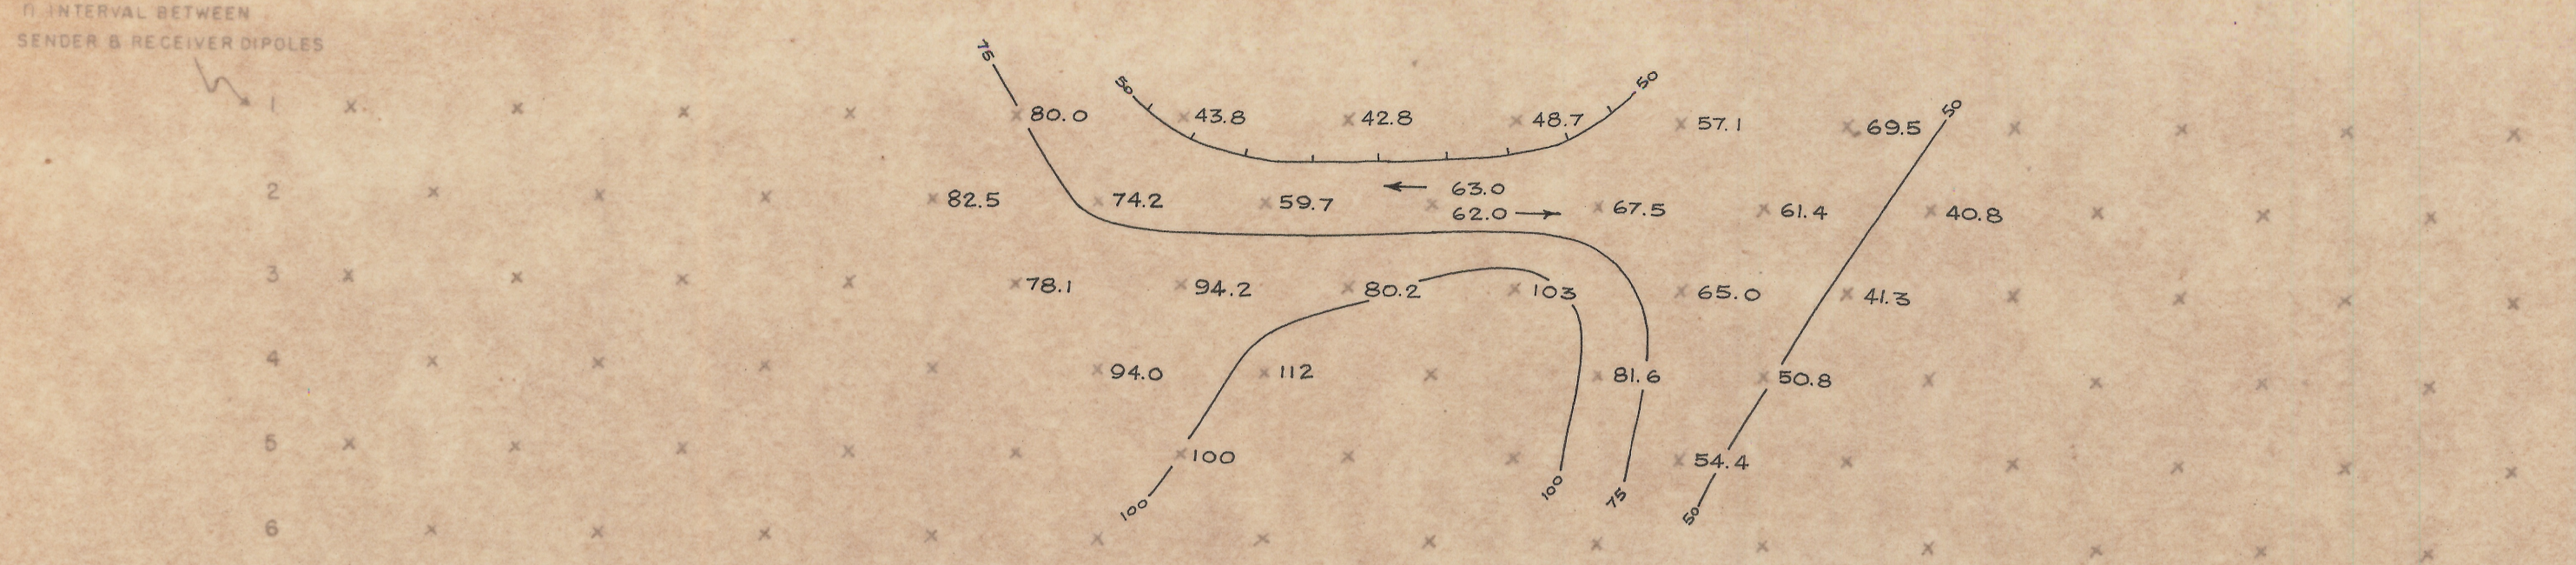


APPARENT RESISTIVITY ($\rho_{DC} / 2\pi$)
 IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 cps

EXPLANATION

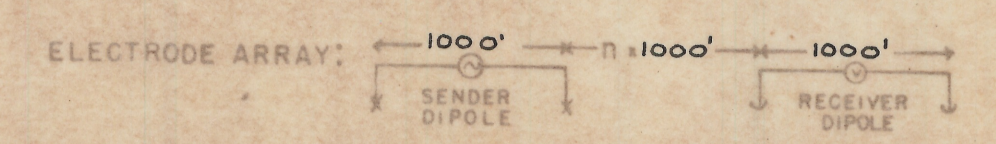

RELATIVE ANOMALY STRENGTH

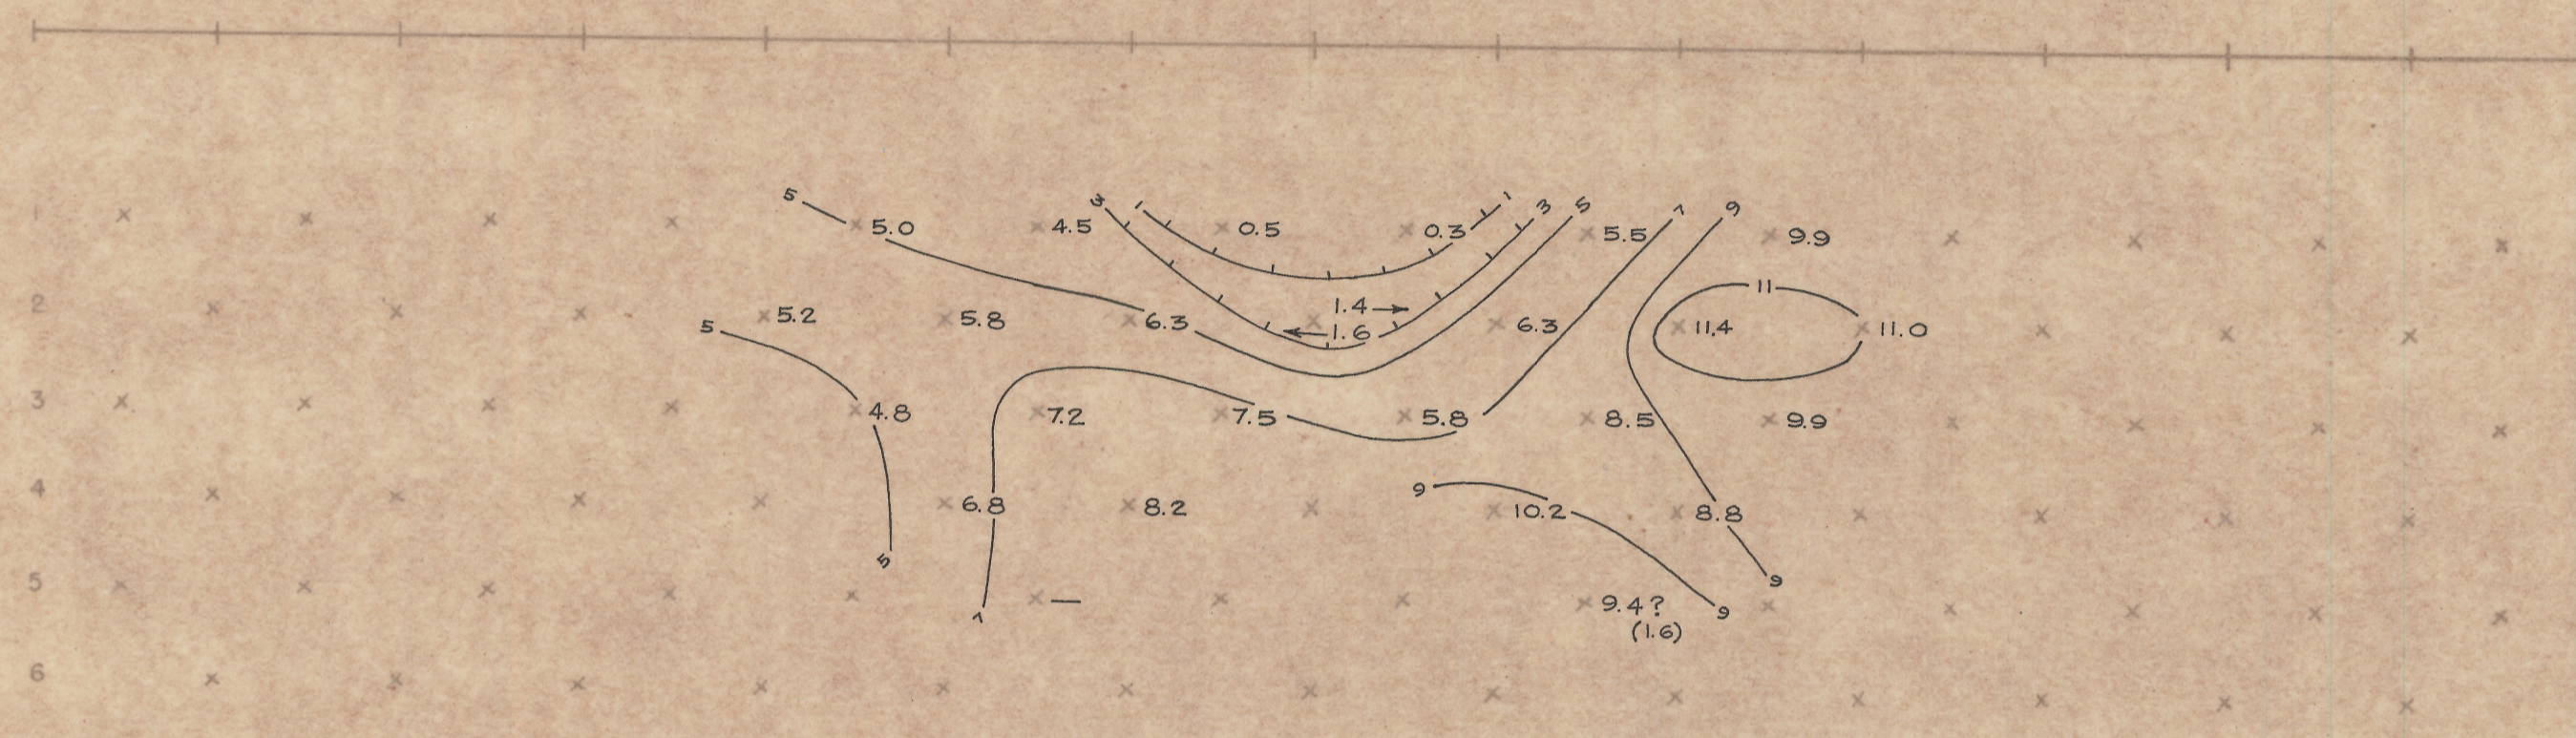

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 1.0 cps

Subscript on 5n PFE's refer to the inductive coupling frequency effect (computation based on homogeneity)

BAGDAD EXTENSION PROJECT

SECTIONAL DATA SHEET

LINE No. 3

INDUCED POLARIZATION TRAVERSE


HEINRICH'S GEOEXPLORATION COMPANY

SCALE: 1" = 1000'

DATE: JULY 1964

FOR


NEWMONT EXPLORATION LTD.

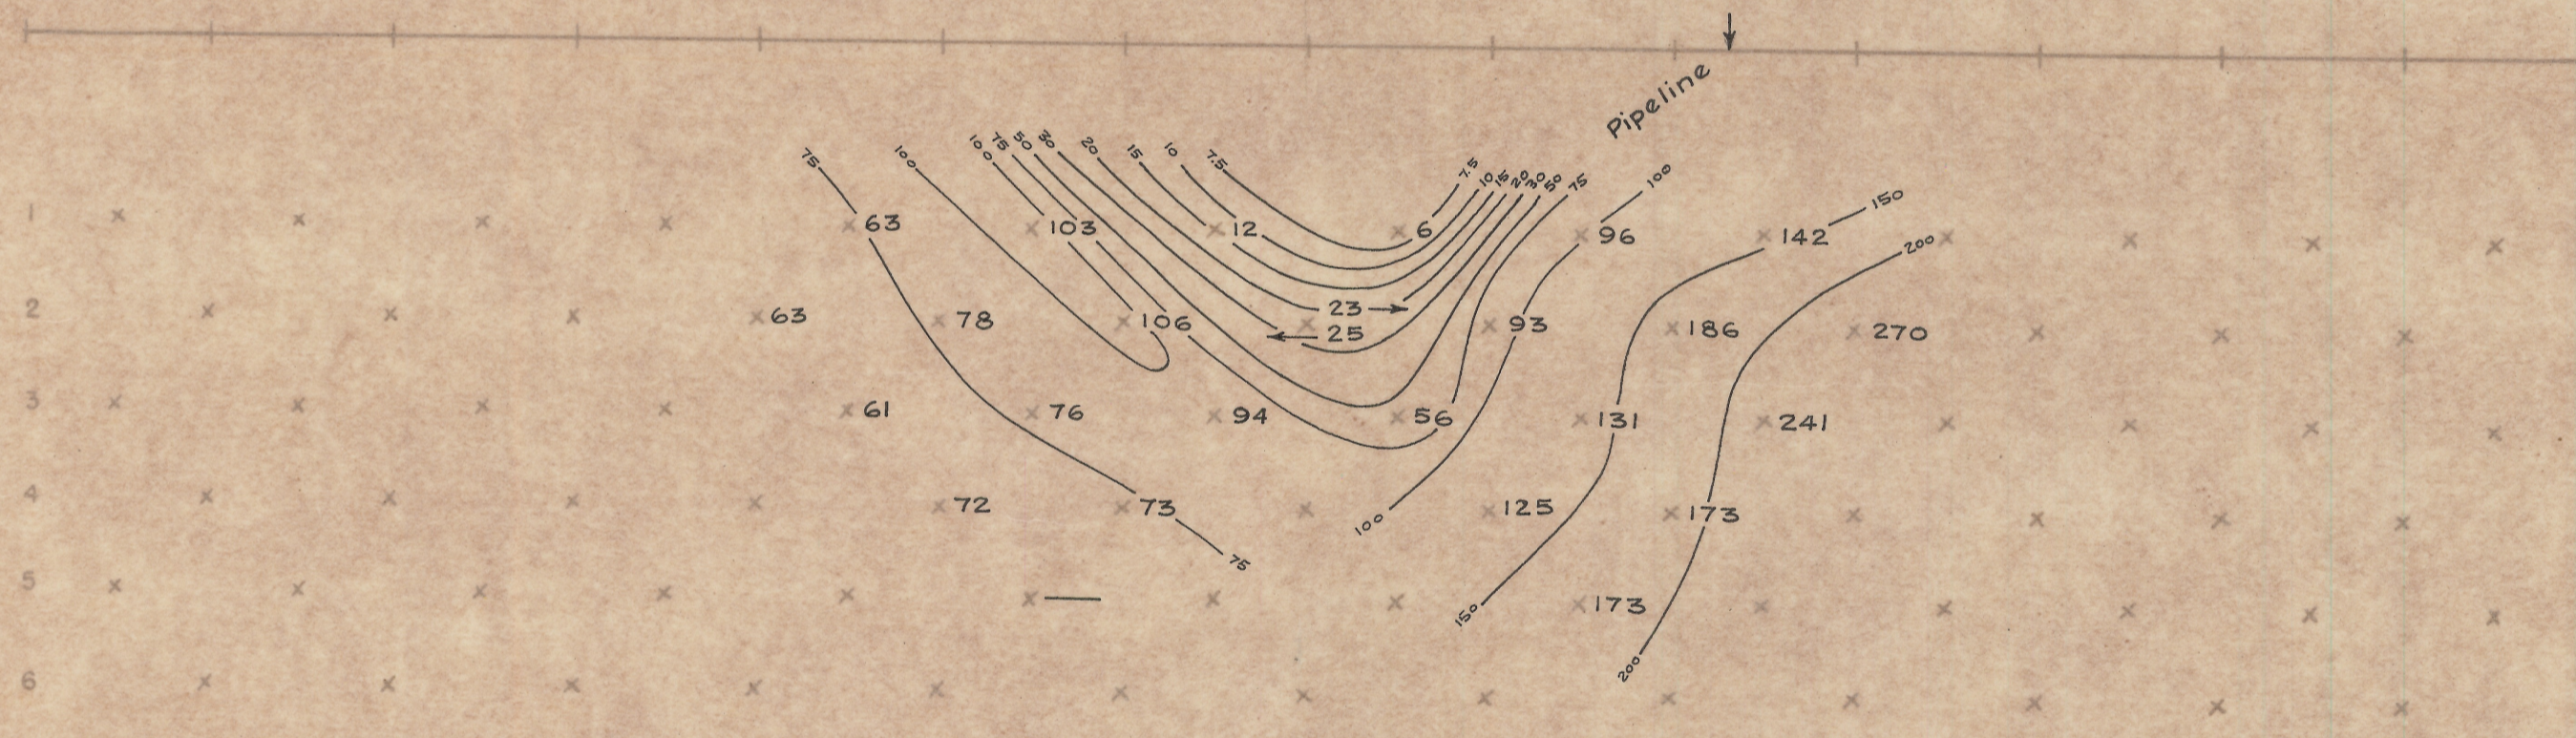

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 $(MCF = PFE \times 1000 / \rho_{DC} / 2\pi)$
 CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL
 SURFACE PROFILE
 GEOLOGY, ETC.

1000'

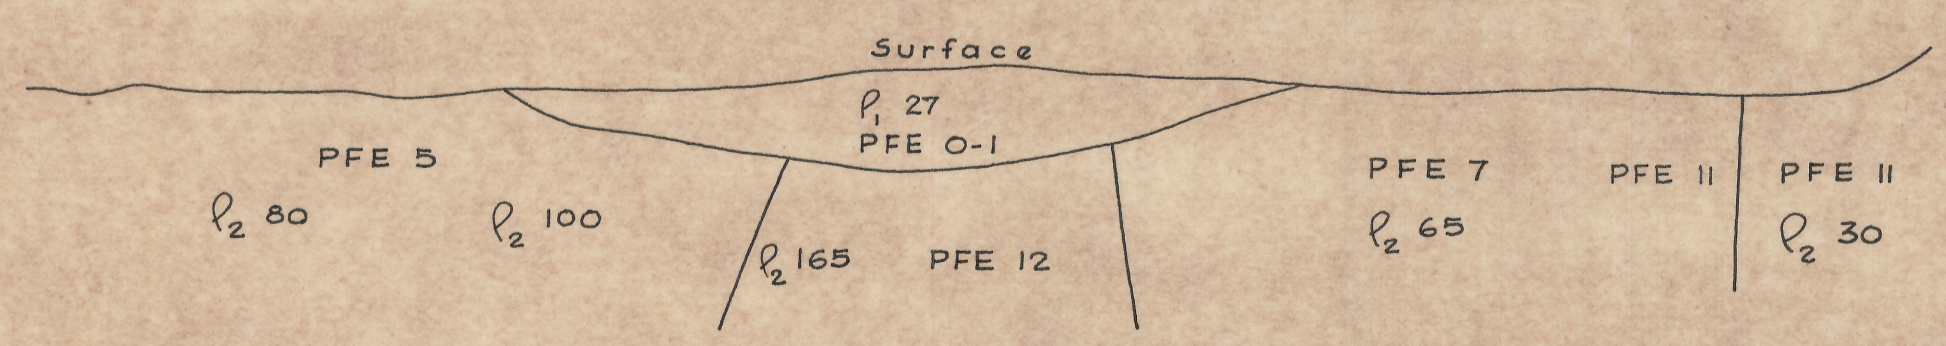

INTERPRETATION

Looking Westerly

1000'