
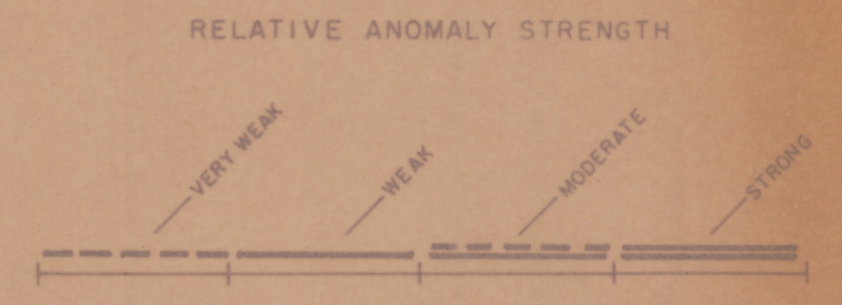



APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET $\frac{\rho}{2L}$

CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.


EXPLANATION

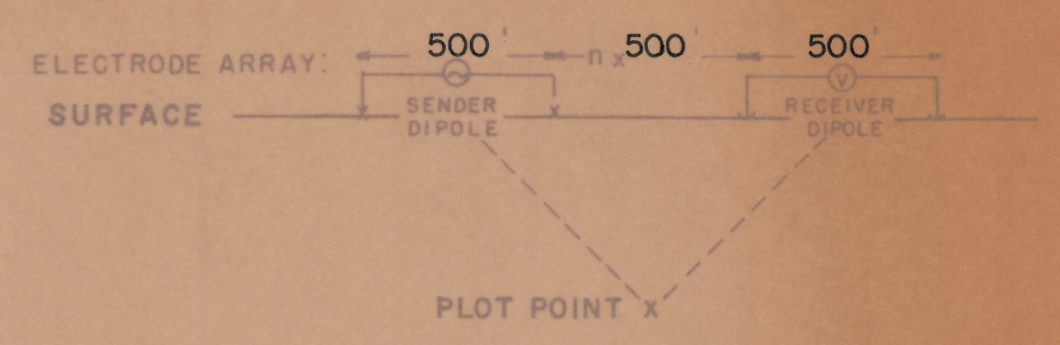

LOOKING S 58° W

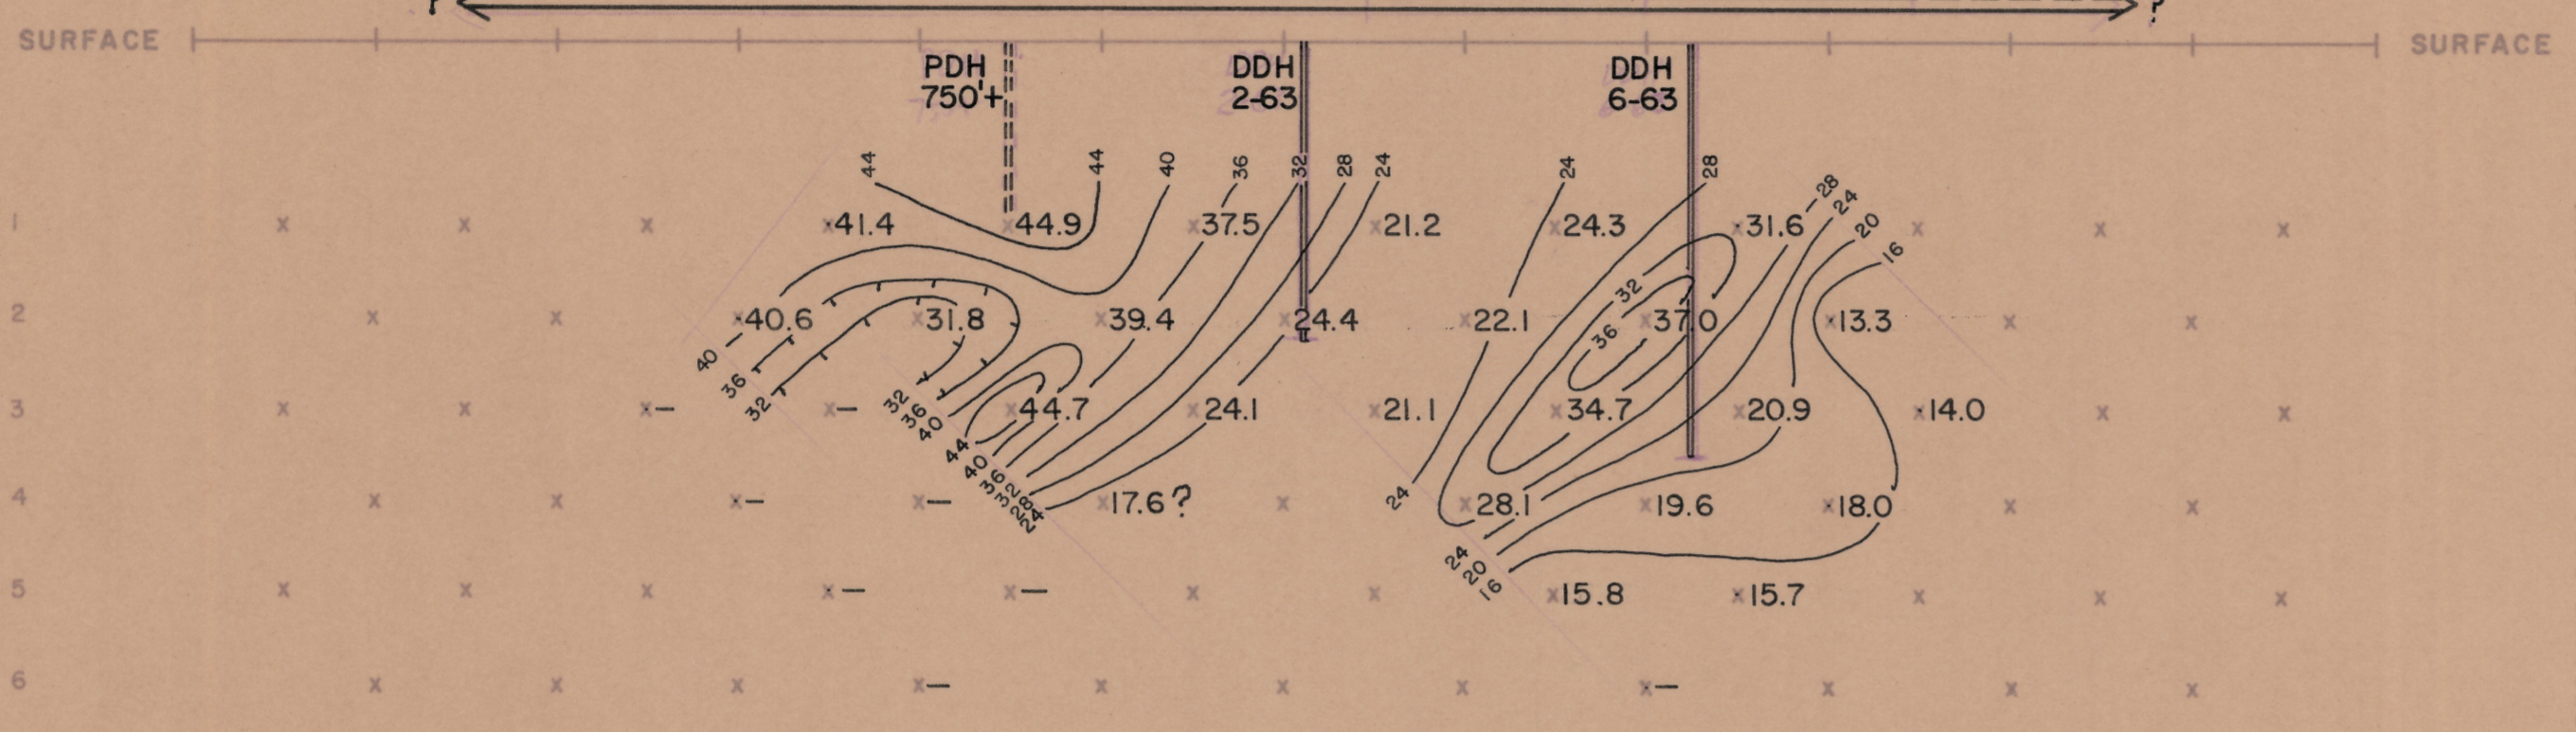

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

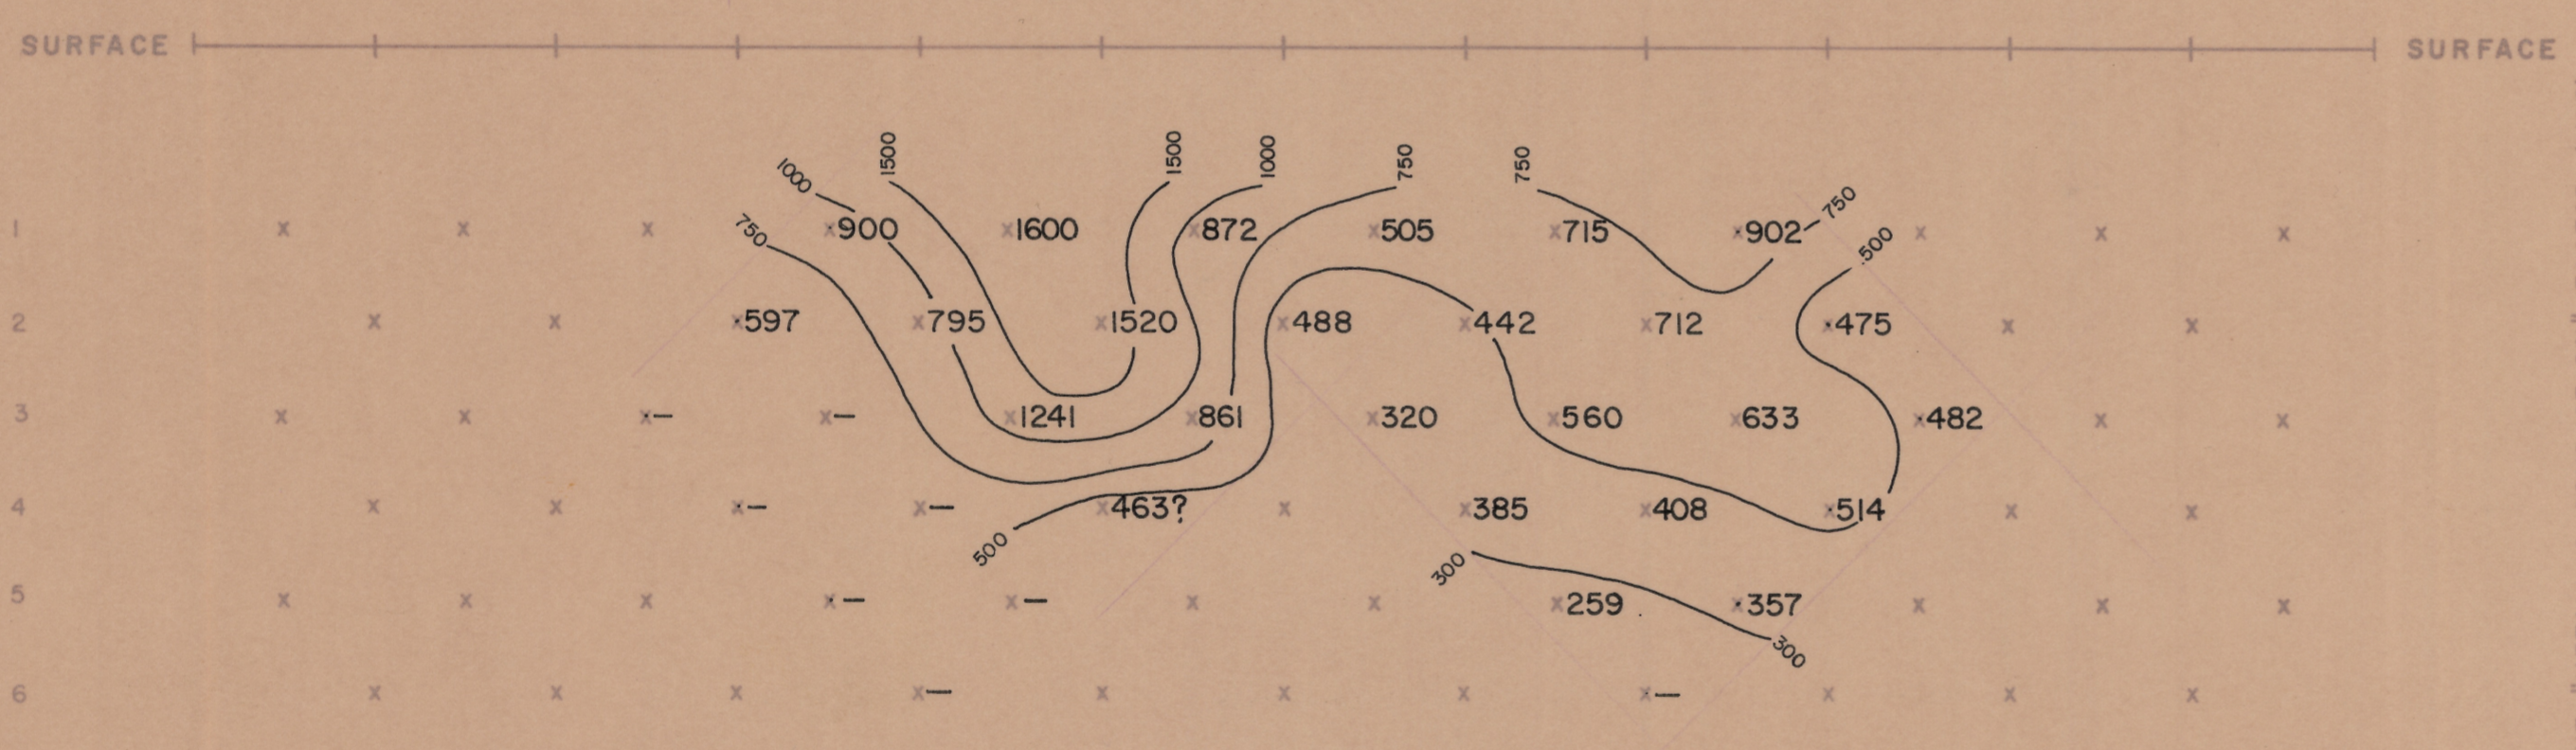

APPARENT "METALLIC CONDUCTION" FACTOR (MGF)
(MGF = $\frac{\rho_{DC}}{PFE \times 1000}$)
CONTOUR INTERVAL LOGARITHMIC

BAGDAD AREA

SECTIONAL DATA SHEET
LINE NO. 4

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 500' DATE: APRIL 1967

FOR
BAGDAD COPPER CORP.

SELF POTENTIAL



Revised 4/11/67