



APPARENT RESISTIVITY ( $\rho_{DC}$ )  
IN UNITS OF OHM FEET  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 cps.


EXPLANATION

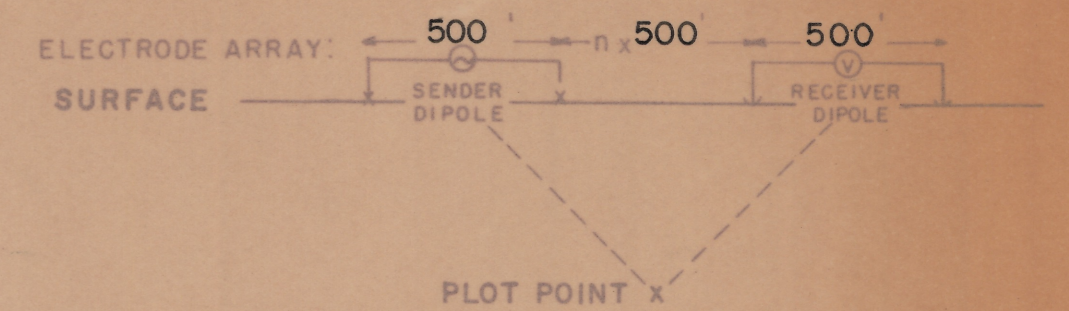


RELATIVE ANOMALY STRENGTH

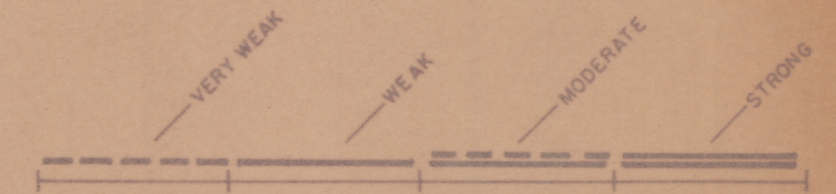

LOOKING S 58° W

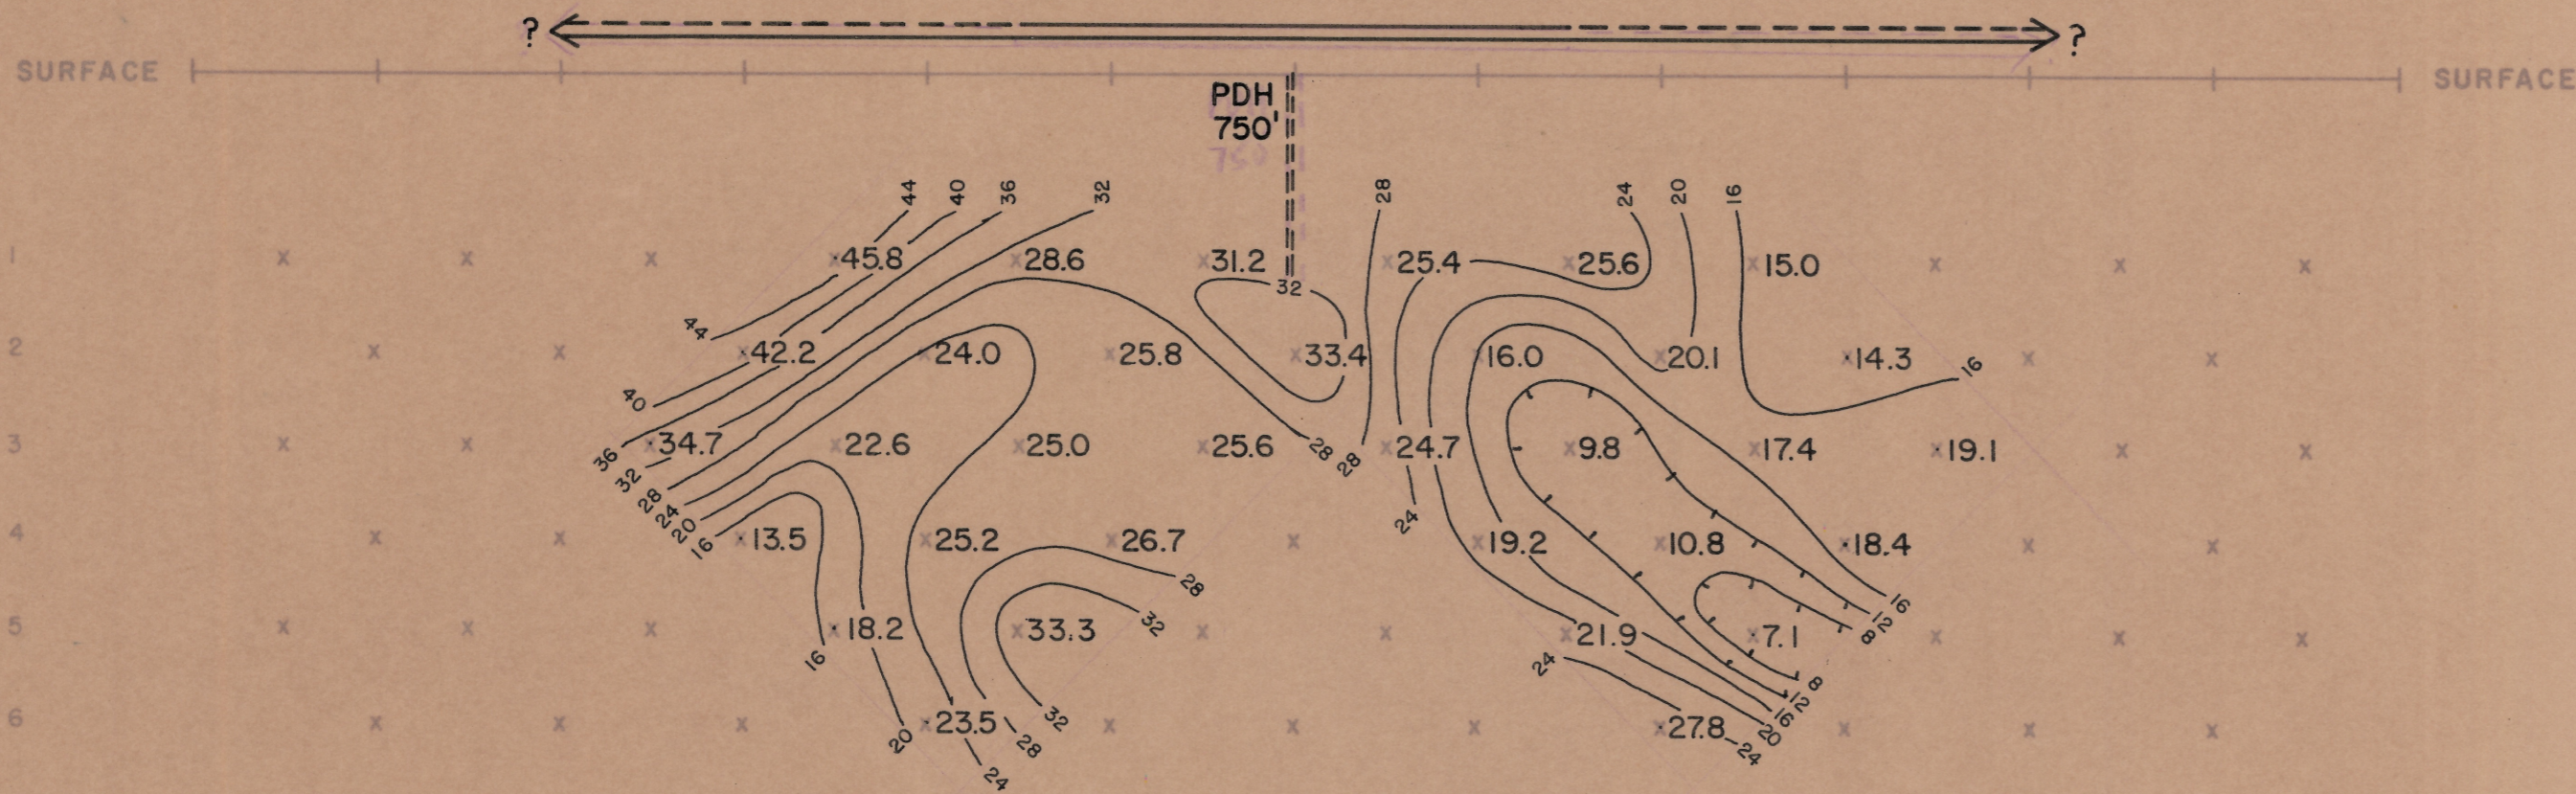

PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 3.0 cps

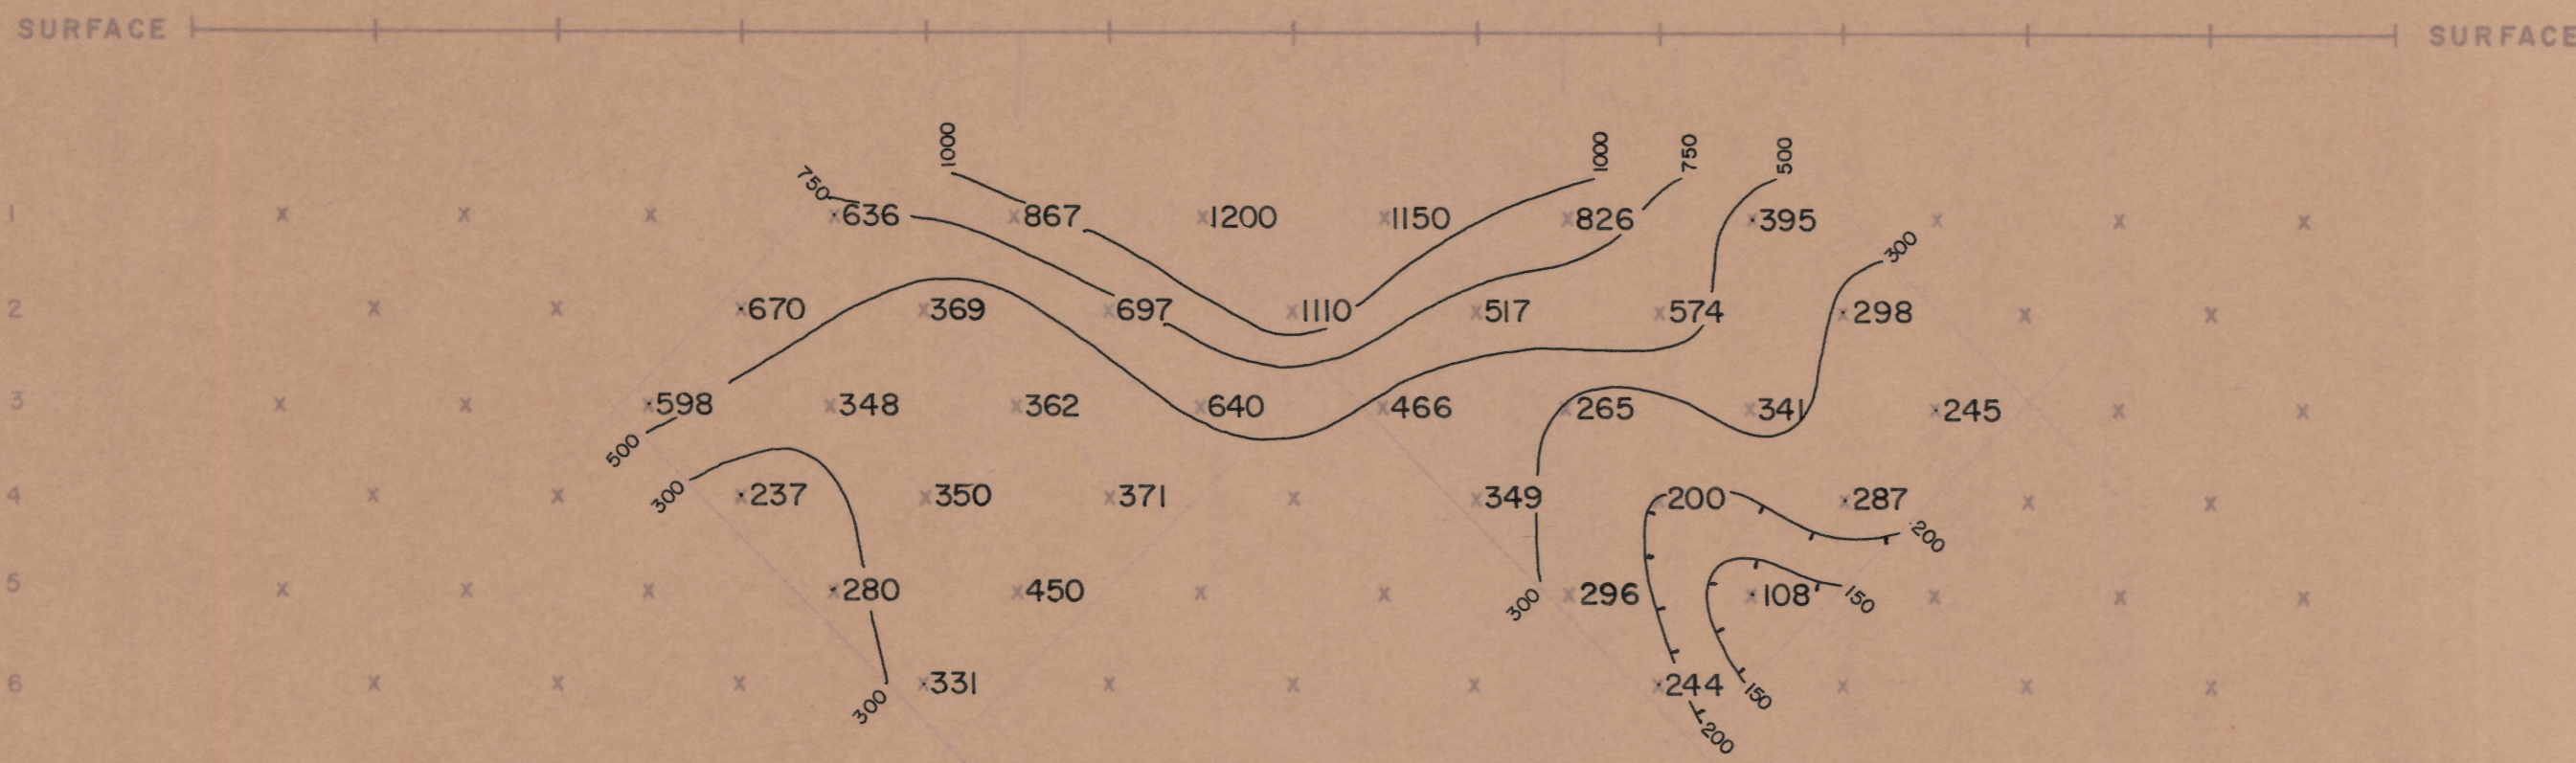

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
(MCF =  $\frac{PFE \times 1000}{\rho_{DC} \times 2\pi}$ )  
CONTOUR INTERVAL LOGARITHMIC

BAGDAD AREA

SECTIONAL DATA SHEET

LINE NO. 6

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 500' DATE: APRIL 1967

FOR  
BAGDAD COPPER CORP.

SELF POTENTIAL

