



APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET/20
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.1 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.1 & 1.0 c.p.s.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 $MCF = \frac{\rho_{DC}}{PFE \times 1000}$
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

EXPLANATION

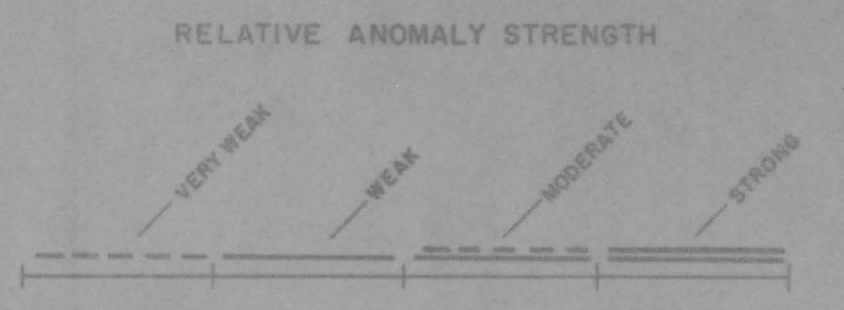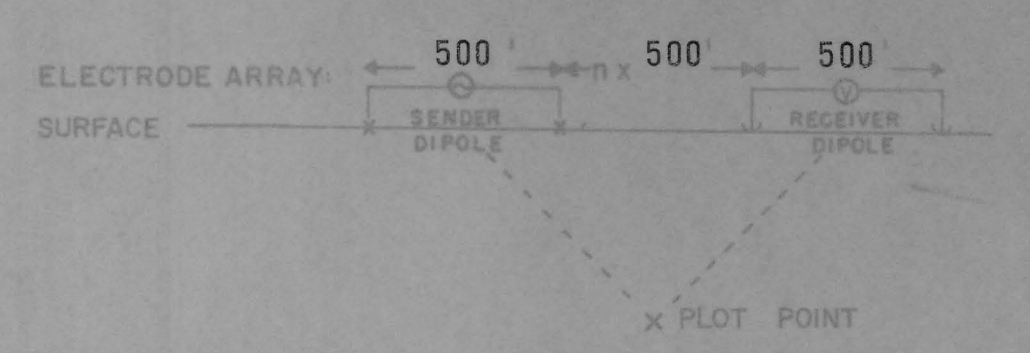

LOOKING WESTERLY

FRIJOLE CLAIM GROUP
HELVETIA AREA
PIMA COUNTY, ARIZONA
SECTIONAL DATA SHEET
LINE NO. 1 (SPREAD 1)
INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 500' DATE: AUG 1968

FOR
SUPERIOR OIL COMPANY

APD-3011-1007 1/10/68 360