

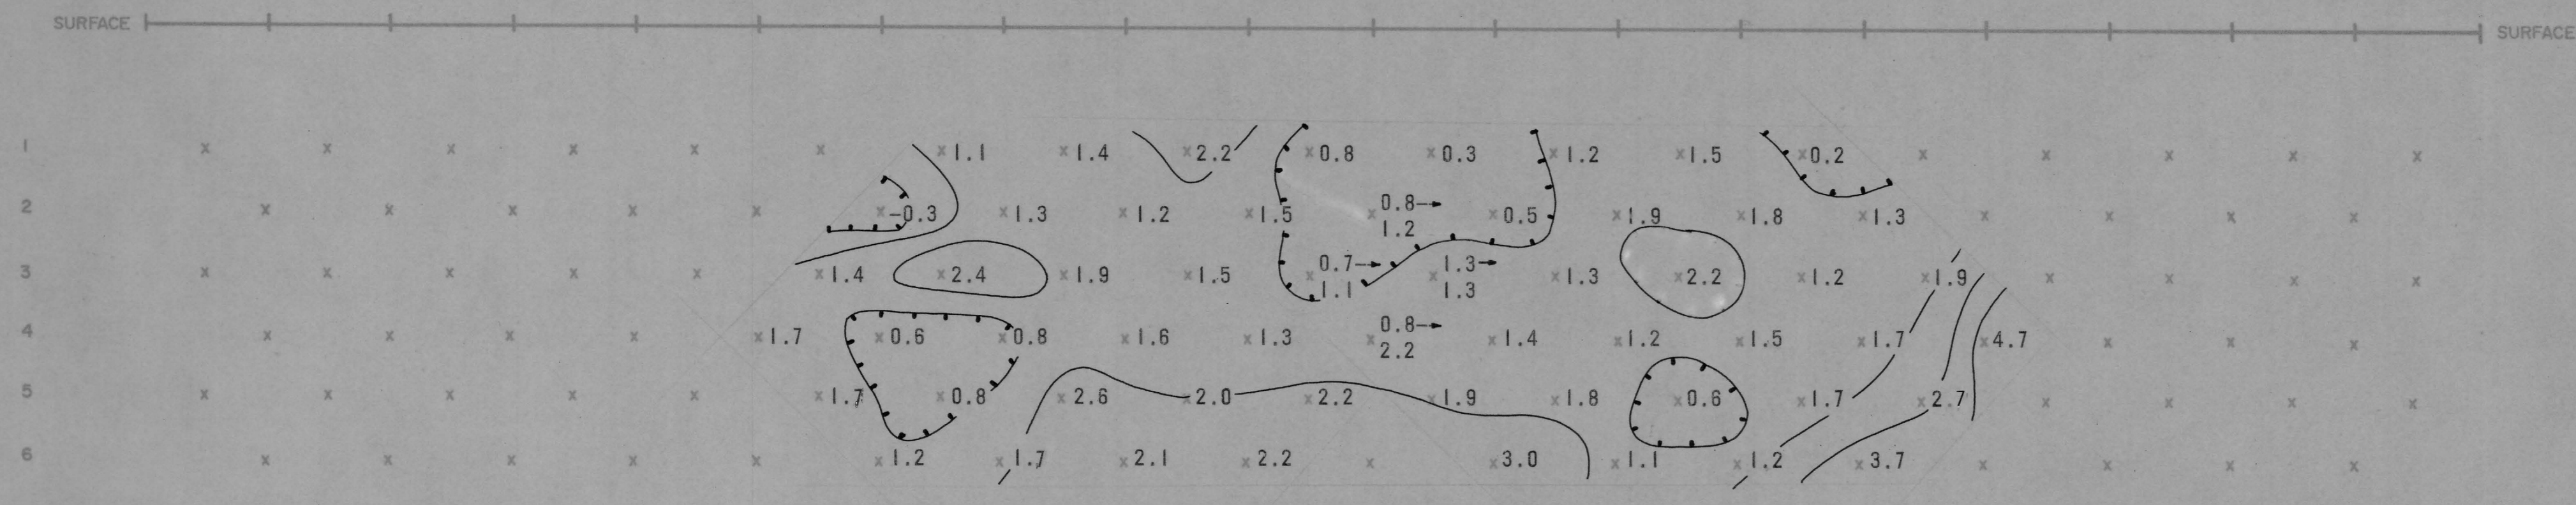


APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET (FT)
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.1 c.p.s.

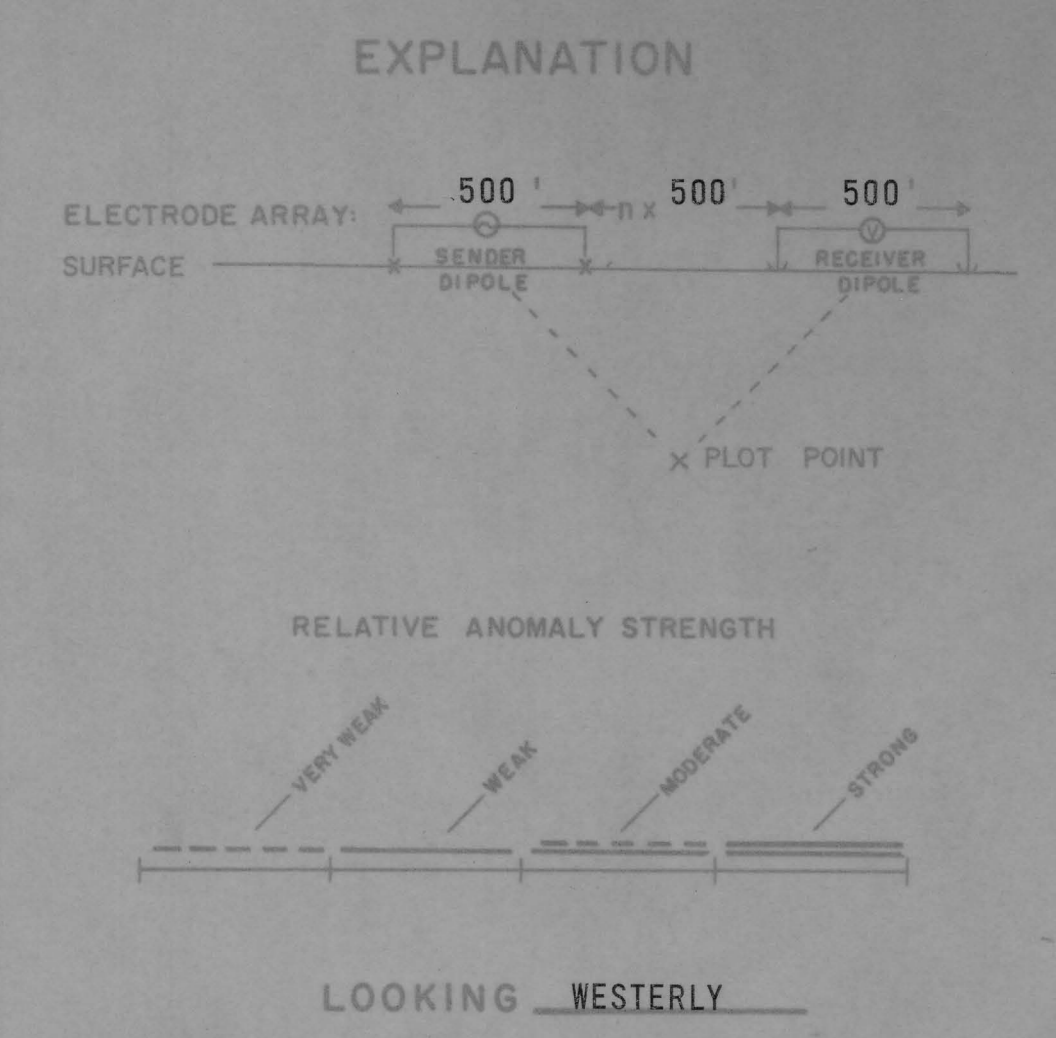

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.1, 8, 10 c.p.s.

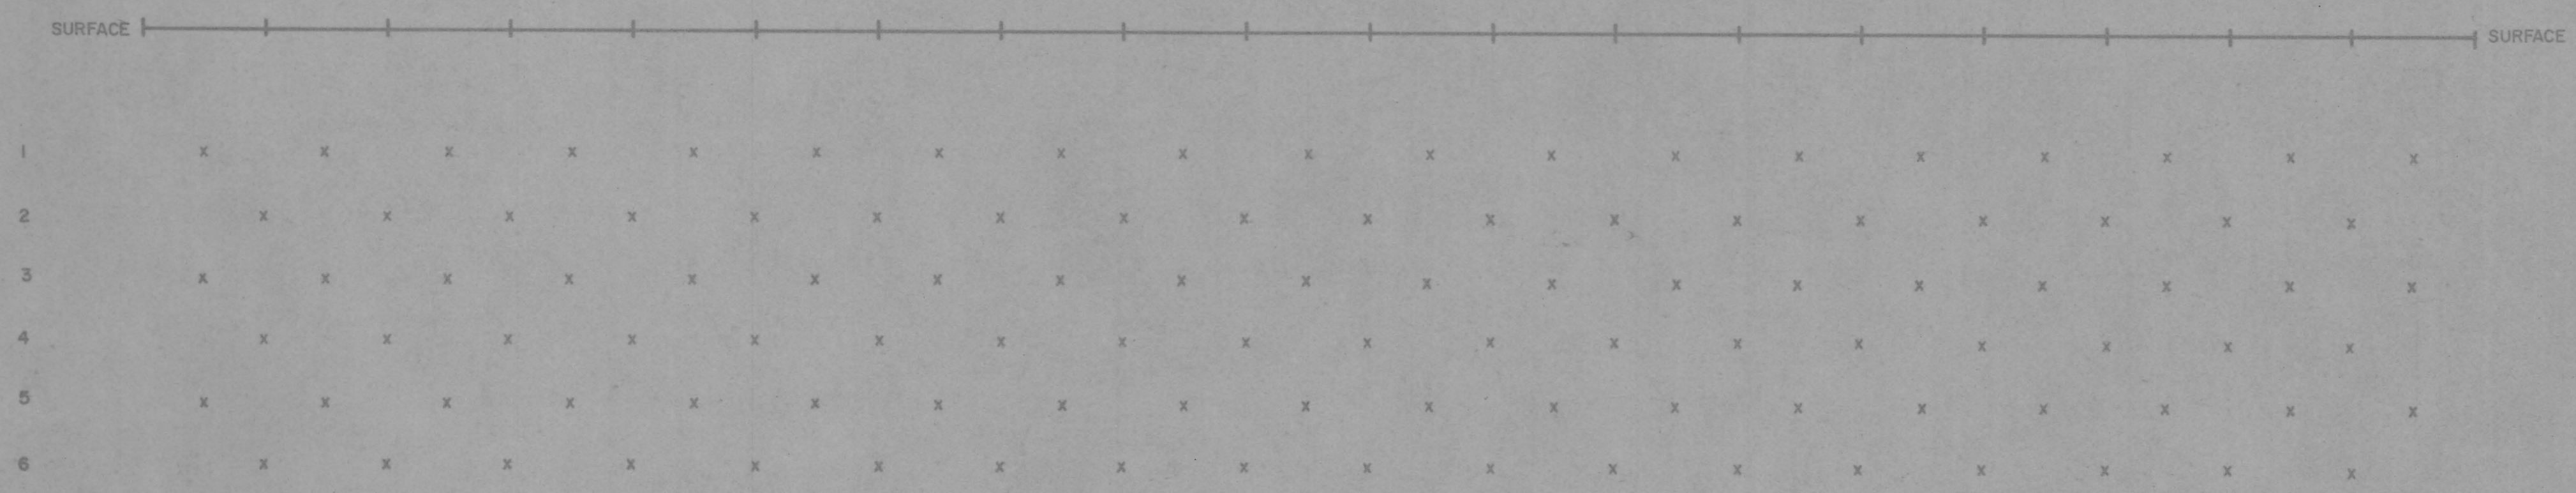

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
($MCF = \frac{PFE \times 1000}{\rho_{DC}}$)
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

FRIJOLE CLAIM GROUP
HELVETIA AREA
PIMA COUNTY, ARIZONA

SECTIONAL DATA SHEET
LINE NO. 2 (SPREAD 1)
INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 500' DATE: SEP 1968

FOR
SUPERIOR OIL COMPANY

2400-587-0712