




ELECTRODES SURFACE STATIONS
 10' INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

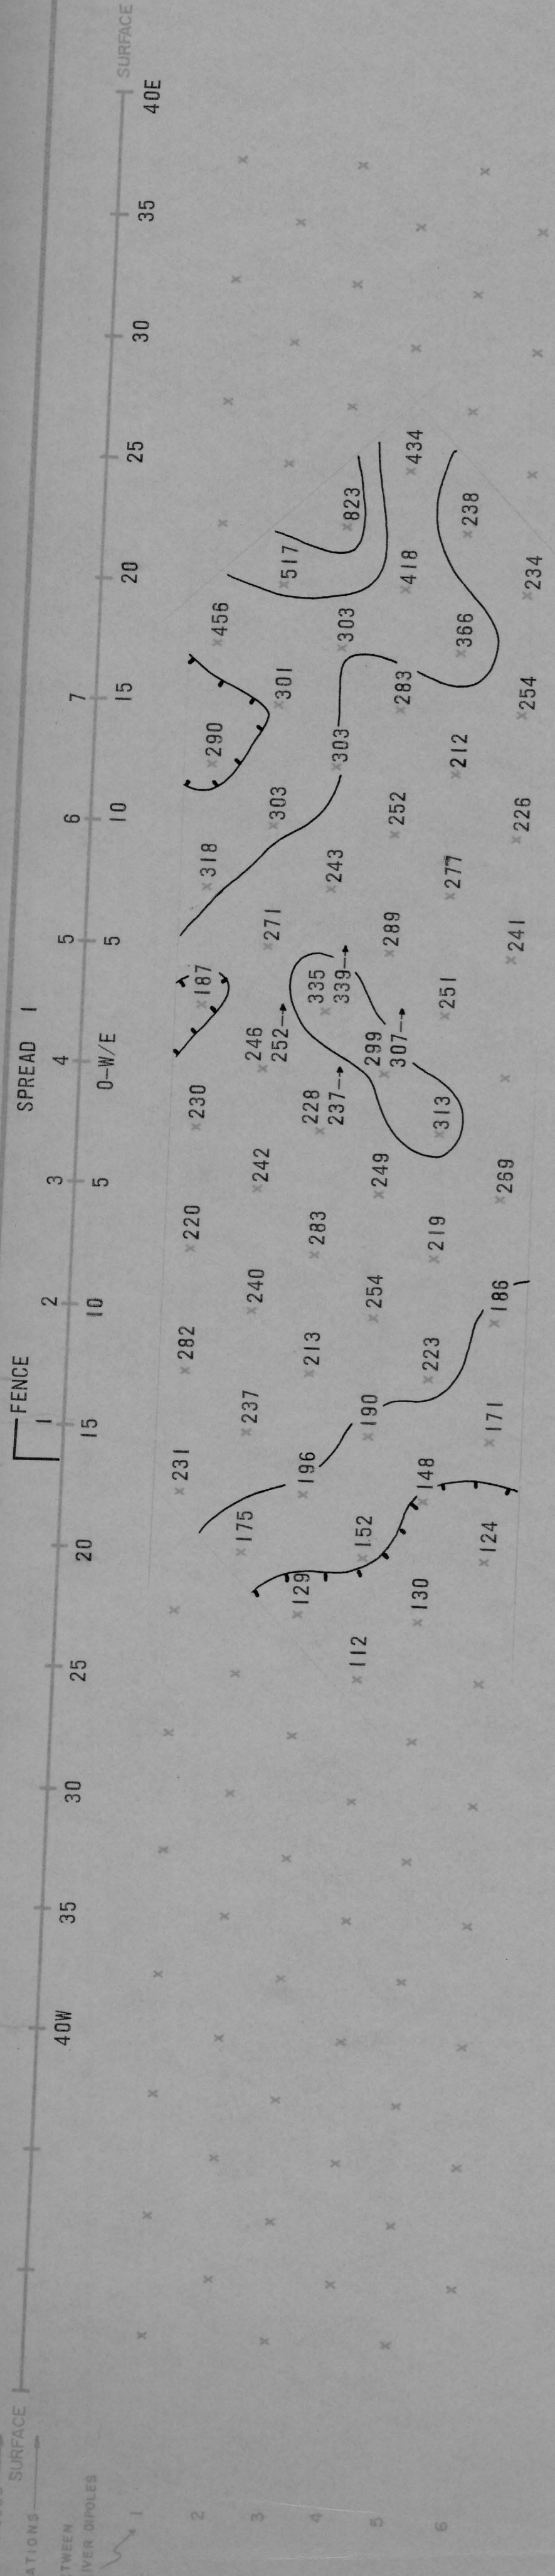

EXPLANATION

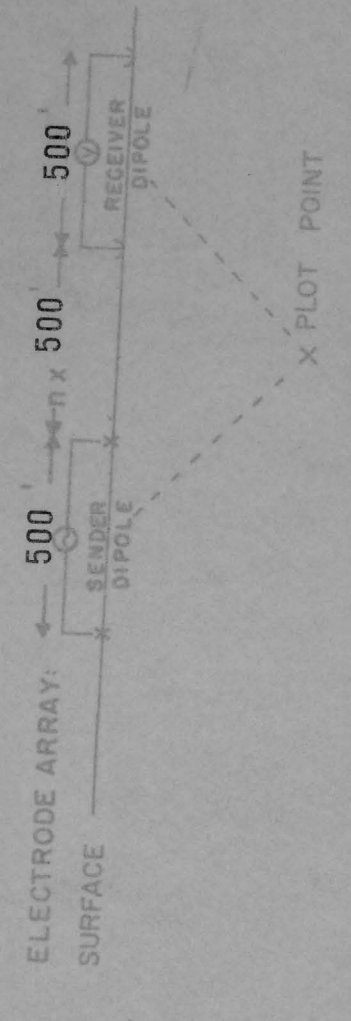


RELATIVE ANOMALY STRENGTH

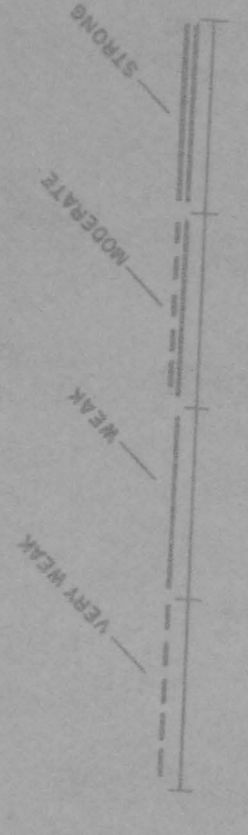

LOOKING NORTH

APARENT RESISTIVITY (RA) IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.1 cps

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.1 & 1.0 cps

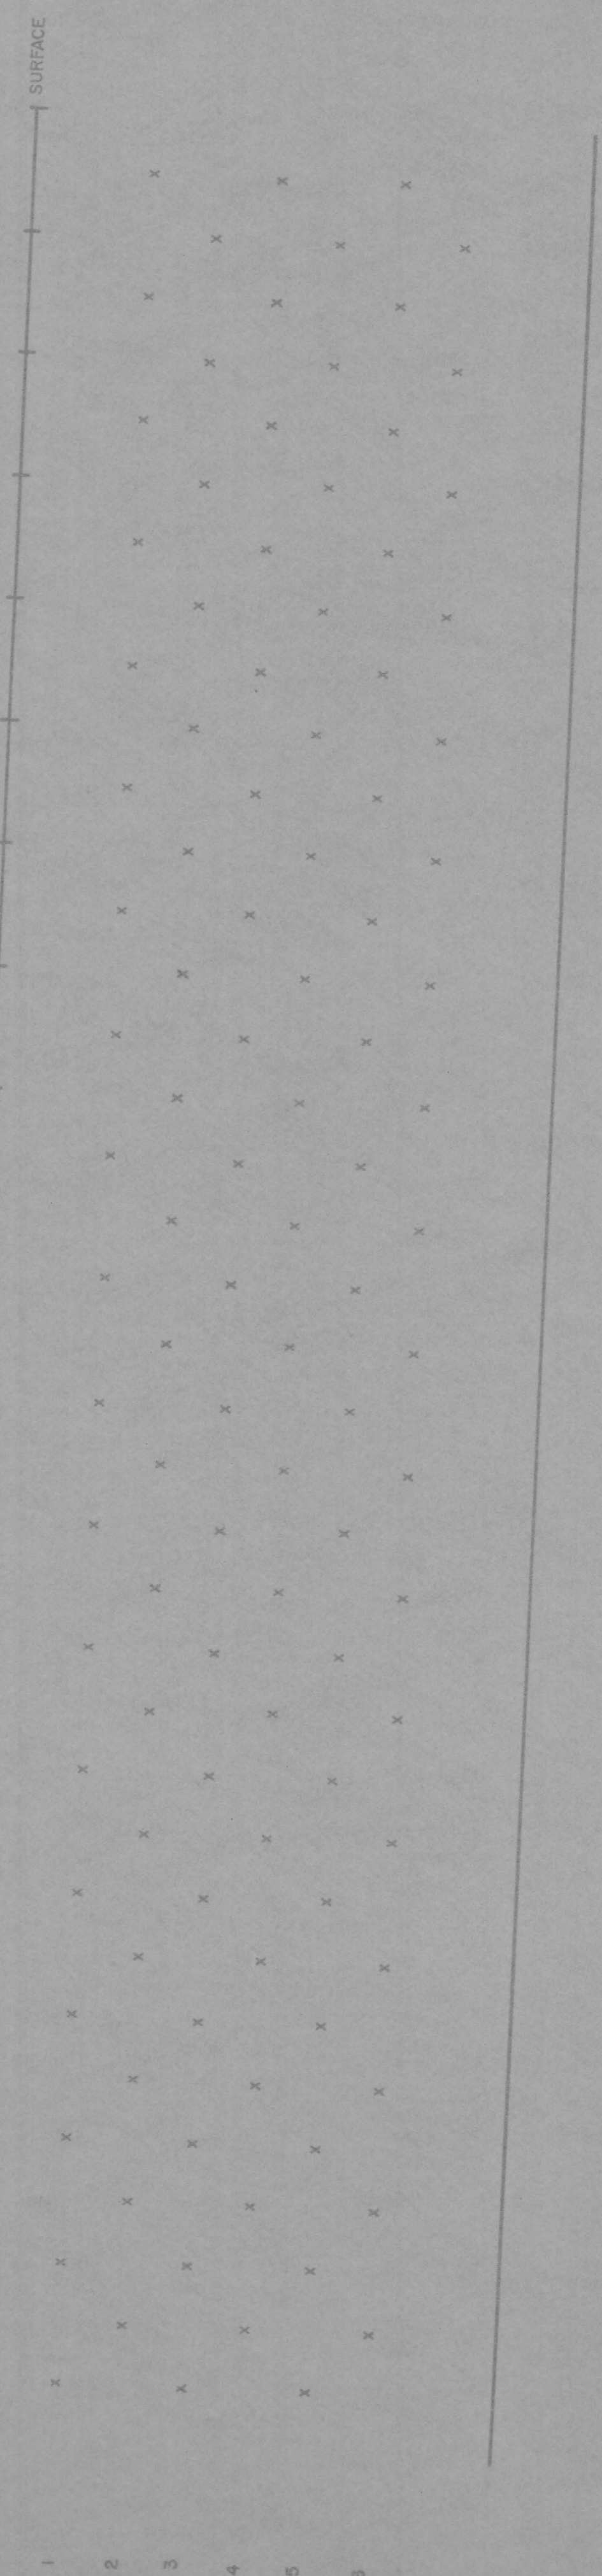

APARENT "METALLIC CONDUCTION" FACTOR (MCF)
 $MCF = \frac{PFE \times 1000}{RA}$
 CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

FRIJOLE CLAIM GROUP
 HELVETIA AREA
 PIMA COUNTY, ARIZONA

SECTIONAL DATA SHEET
 LINE NO. 3 (SPREAD 1)
 INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 500' DATE: SEP 1968

FOR
 SUPERIOR OIL COMPANY