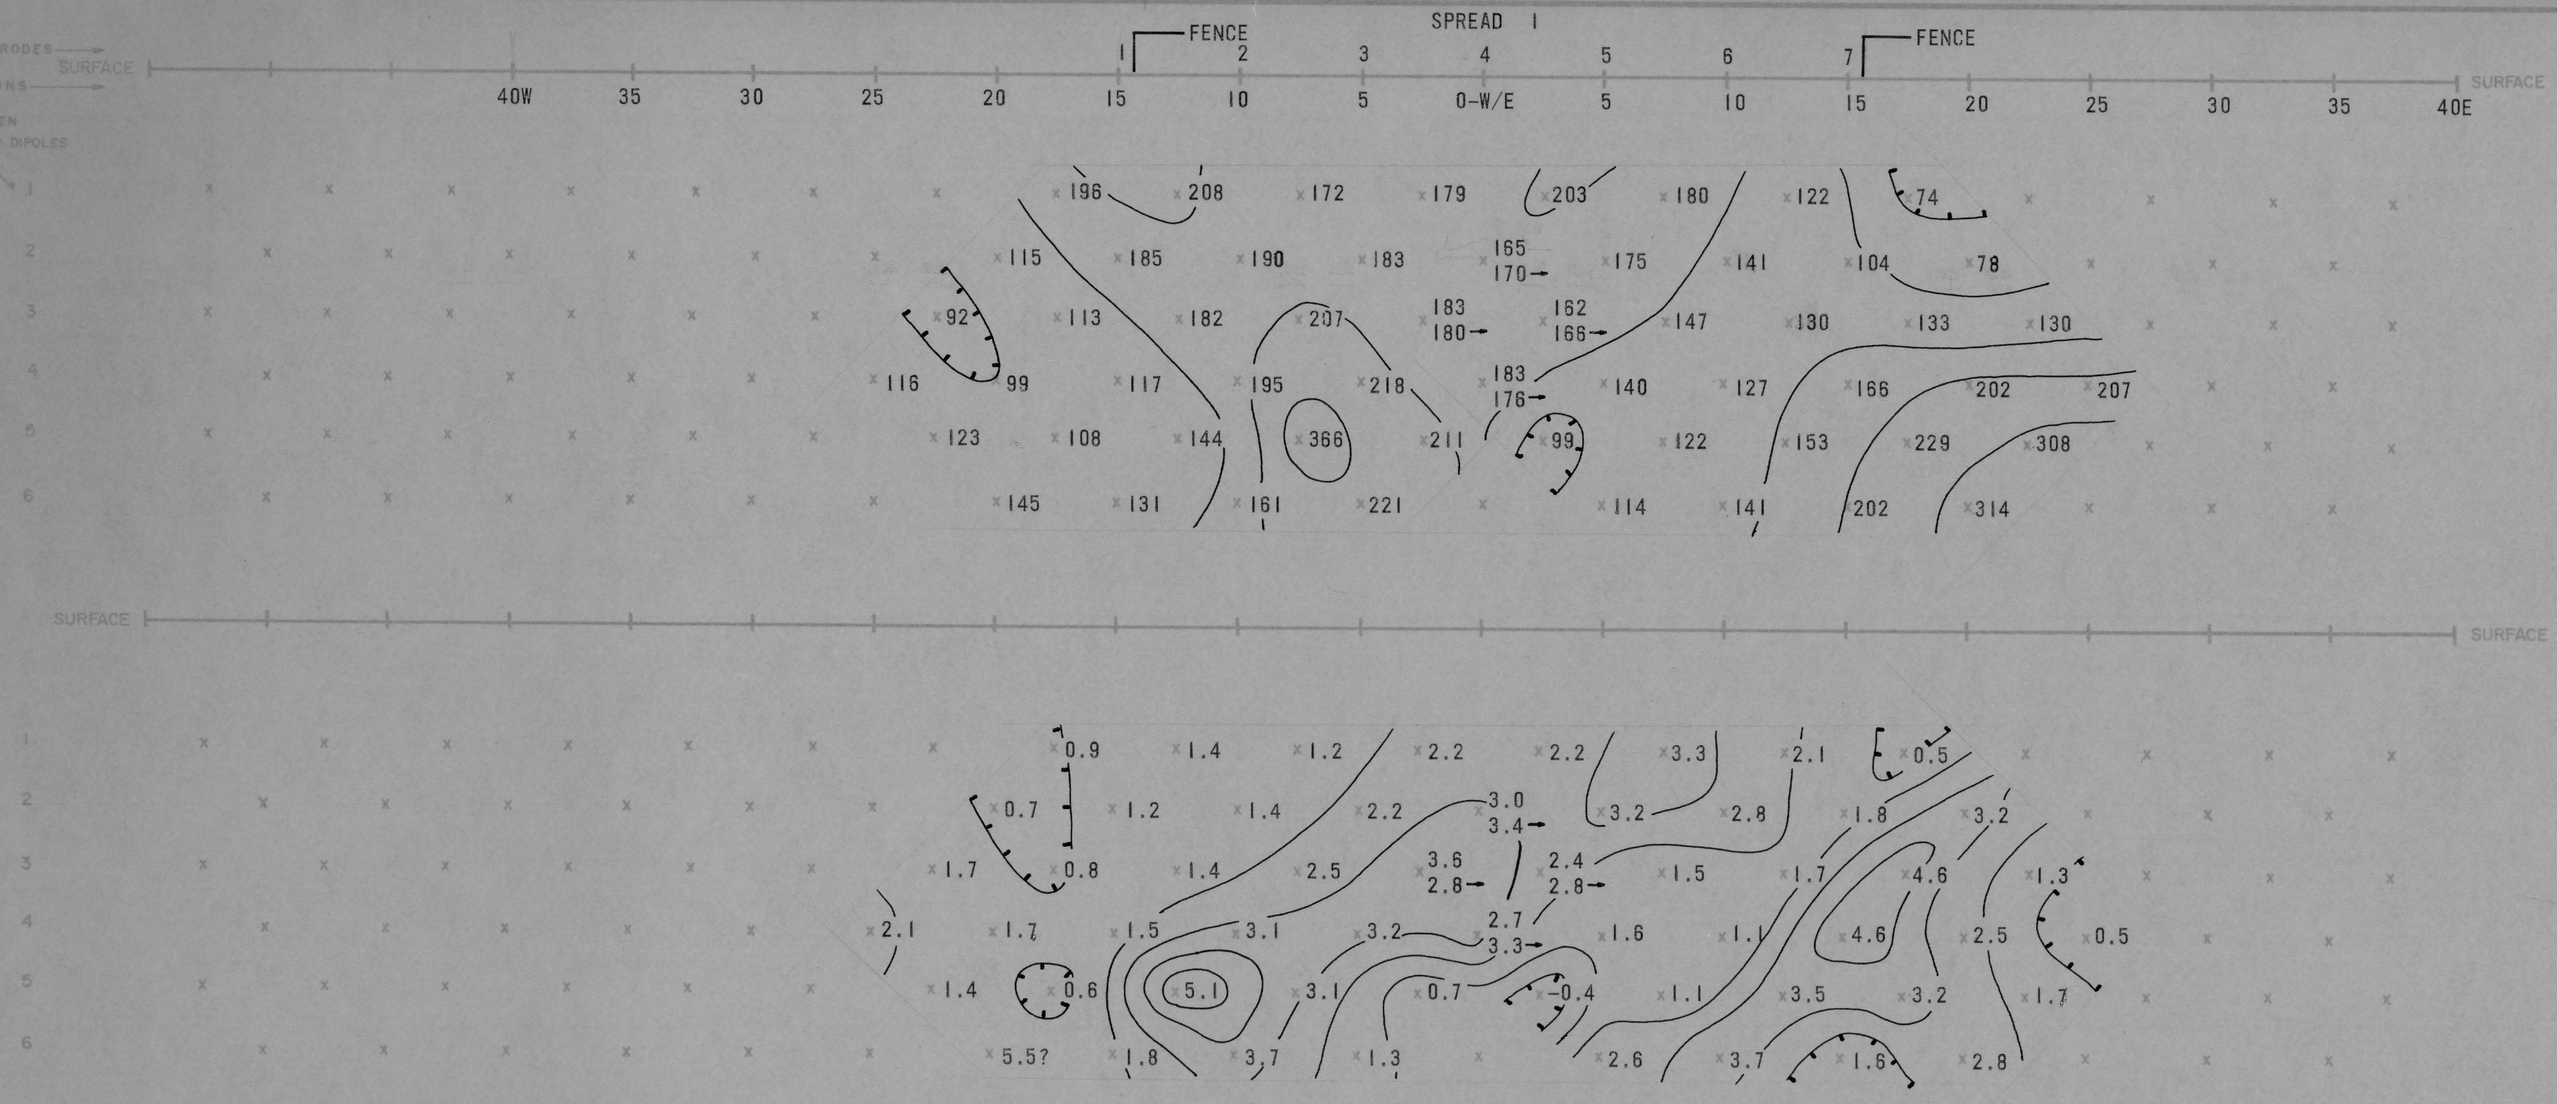

APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET 2π
CONTOUR INTERVAL, LOGARITHMIC
SENDER FREQUENCY: 0.1 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.1 & 1.0 c.p.s.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
$(MCF = \frac{\rho_{DC}(PFE \times 1000)}{2\pi})$
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

EXPLANATION

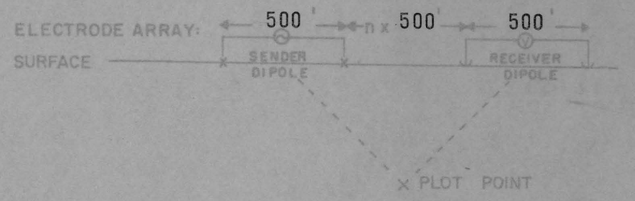

RELATIVE ANOMALY STRENGTH

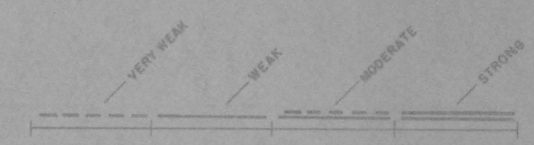

LOOKING NORTH

FRIJOLE CLAIM GROUP
HELVETIA AREA
PIMA COUNTY, ARIZONA

SECTIONAL DATA SHEET
LINE NO. 4 (SPREAD I)
INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 500' DATE: SEP 1968

FOR
SUPERIOR OIL COMPANY

HEINRICHS
GEOEXPLORATION COMPANY
TUCSON, OFFICE BOX 8073, TUCSON, ARIZONA, 85708
Phone: 602/623-0578 Cable: GEOEX, Tucson
vancouver sydney