

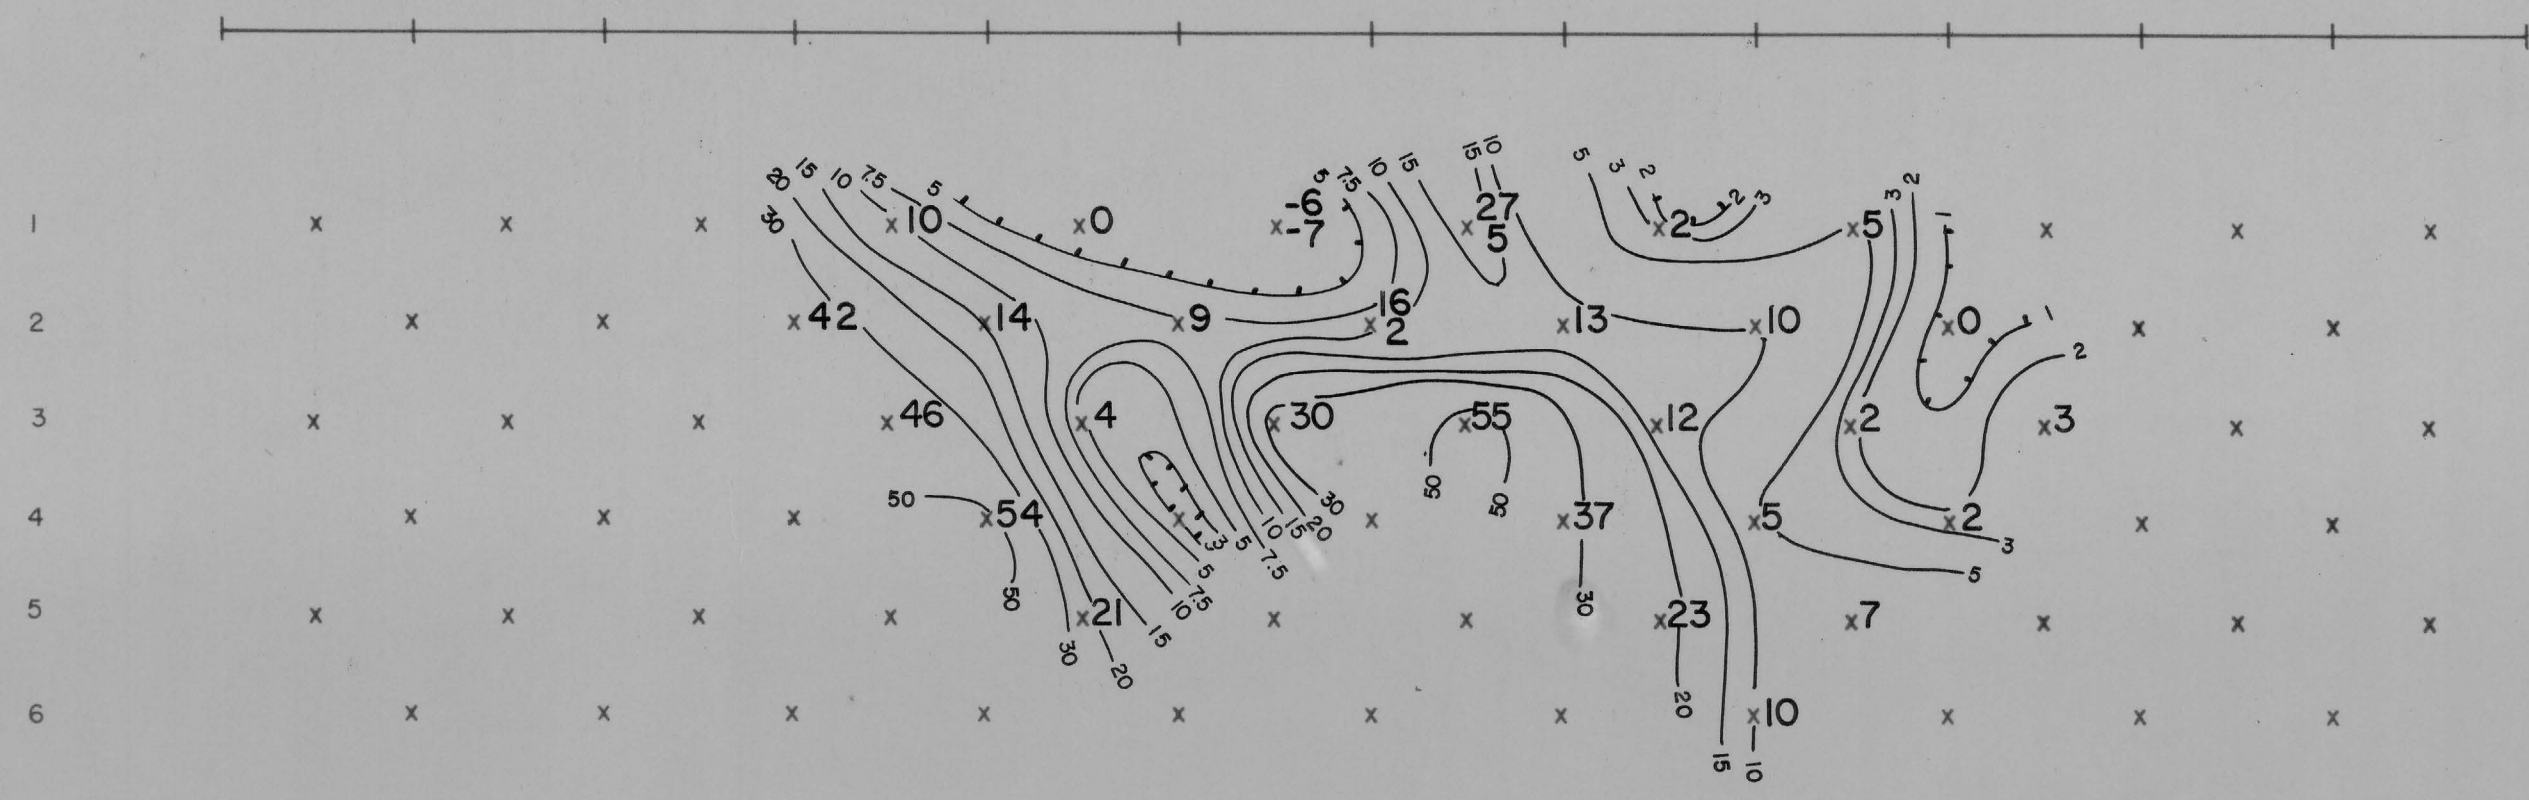
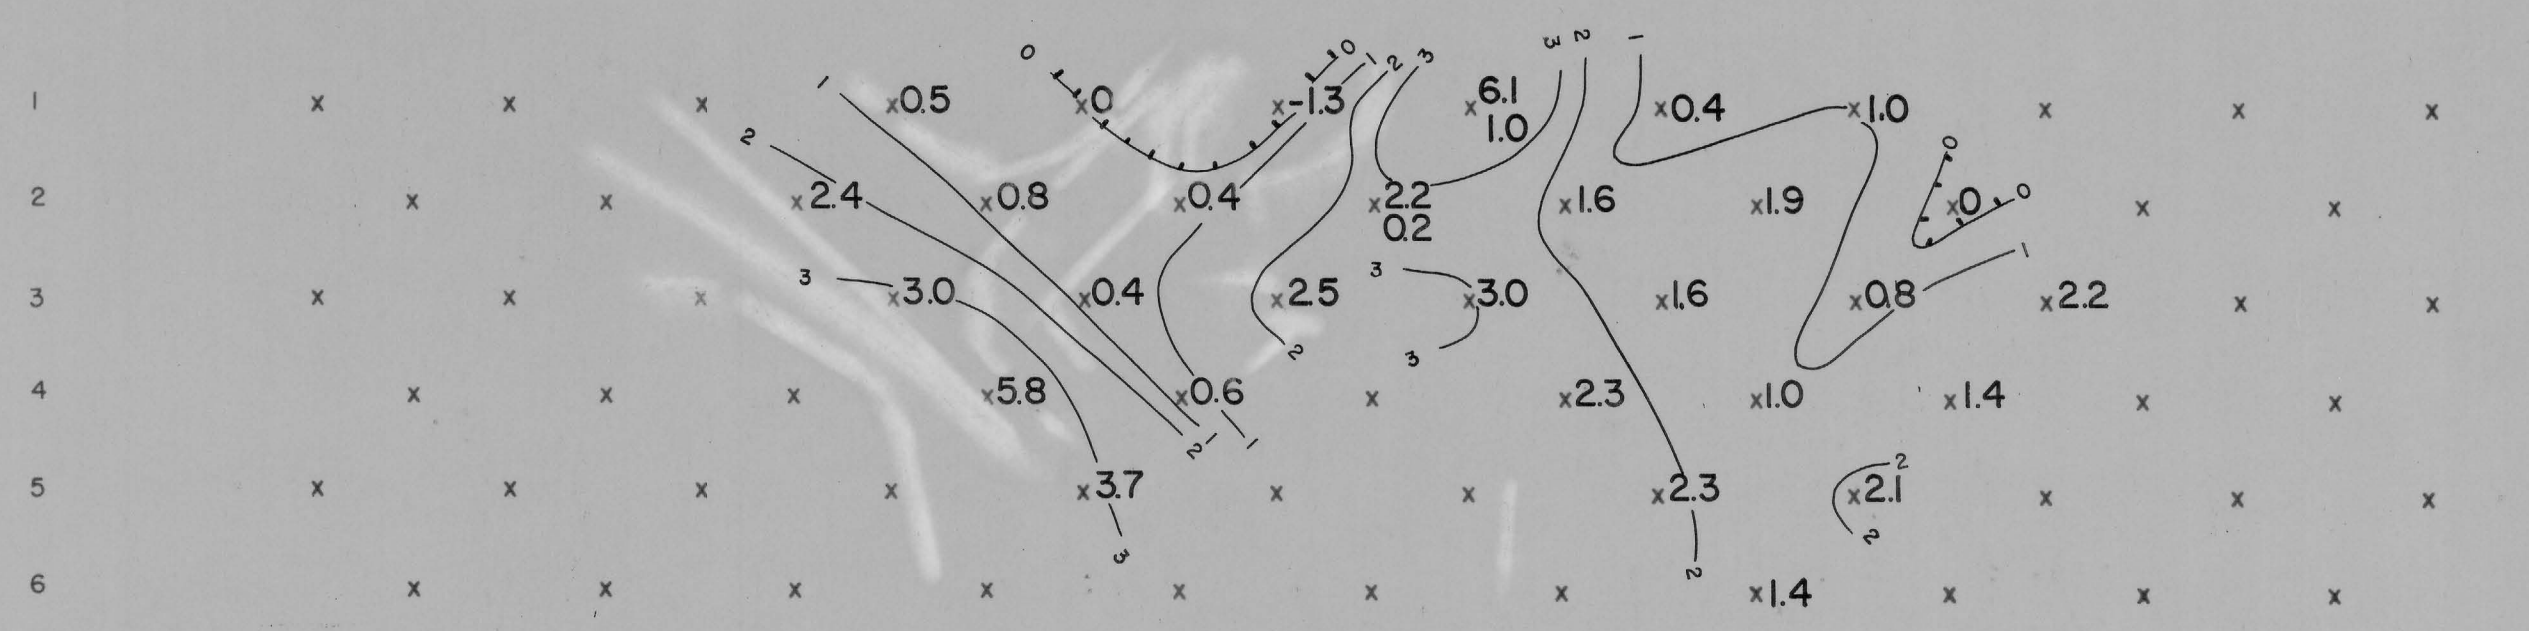


ELECTRODES  
STATIONS  
n INTERVAL BETWEEN  
SENDER & RECEIVER DIPOLES

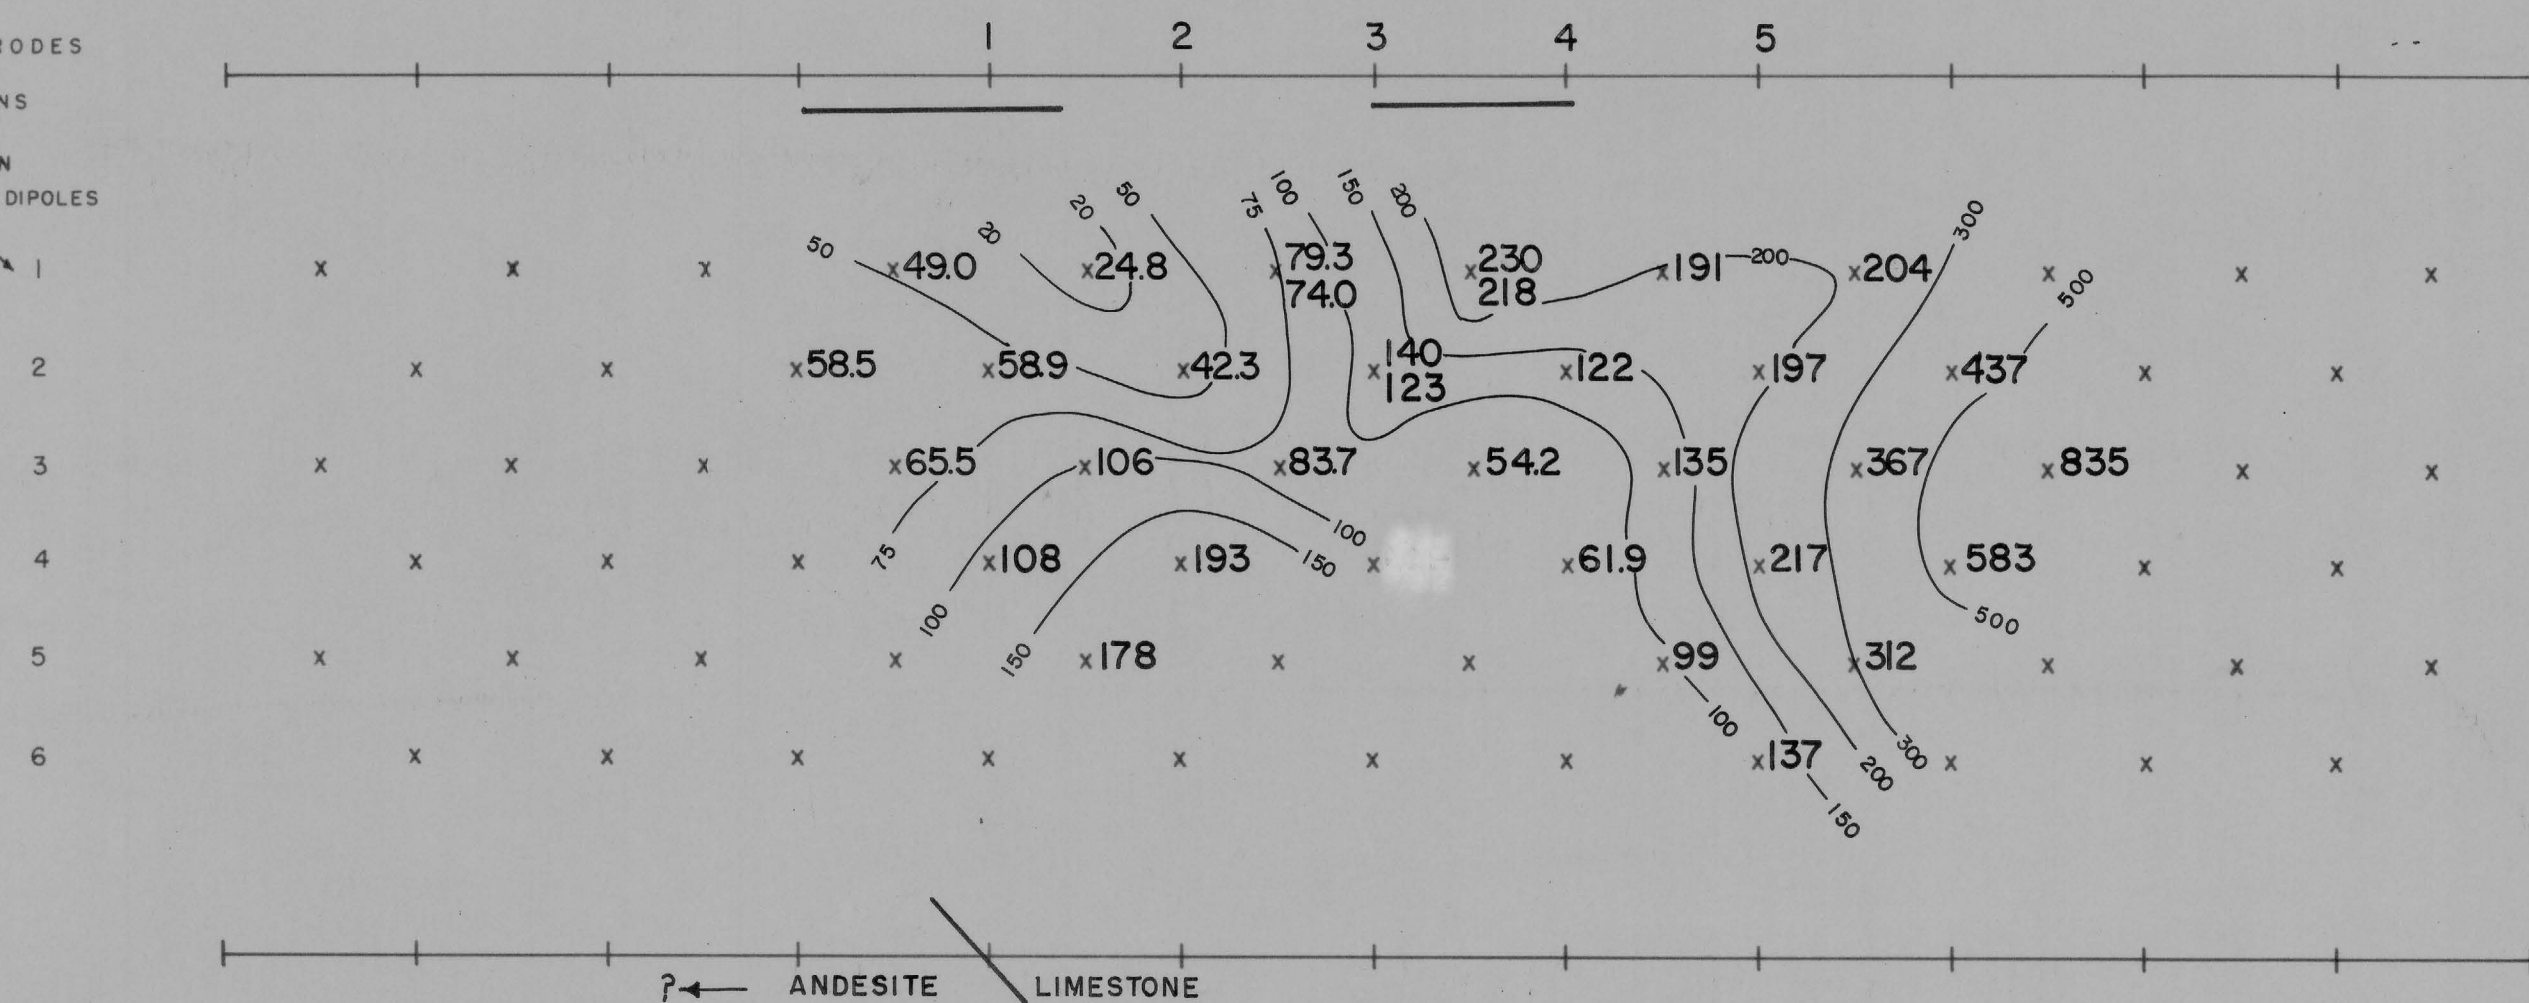


EXPLANATION

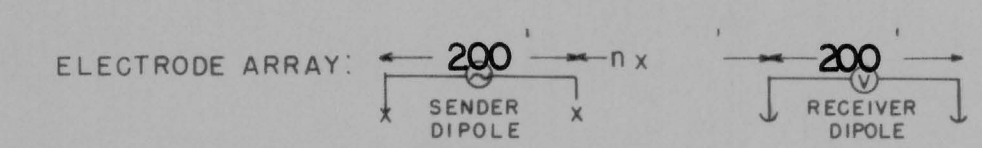

APPARENT RESISTIVITY ( $\rho_{DC}$ )  
IN UNITS OF OHM FEET  $\frac{2\pi t}{n}$   
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 c.p.s.

RELATIVE ANOMALY STRENGTH

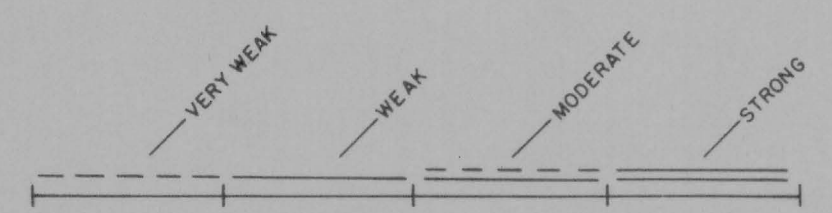

LOOKING NORTH

PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

CHANCE MINE AREA

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
 $(MCF = \frac{PFE \times 1000}{\rho_{DC} \frac{2\pi t}{n}})$   
CONTOUR INTERVAL LOGARITHMIC

SECTIONAL DATA SHEET  
LINE NO. 1  
INDUCED POLARIZATION TRAVERSE  
HEINRICHS GEOEXPLORATION COMPANY  
SCALE: 1" = 200' DATE: DEC. 1964

FOR  
DANIEL L. E. HUCKINS

SELF POTENTIAL  
SURFACE PROFILE  
GEOLOGY, ETC.