

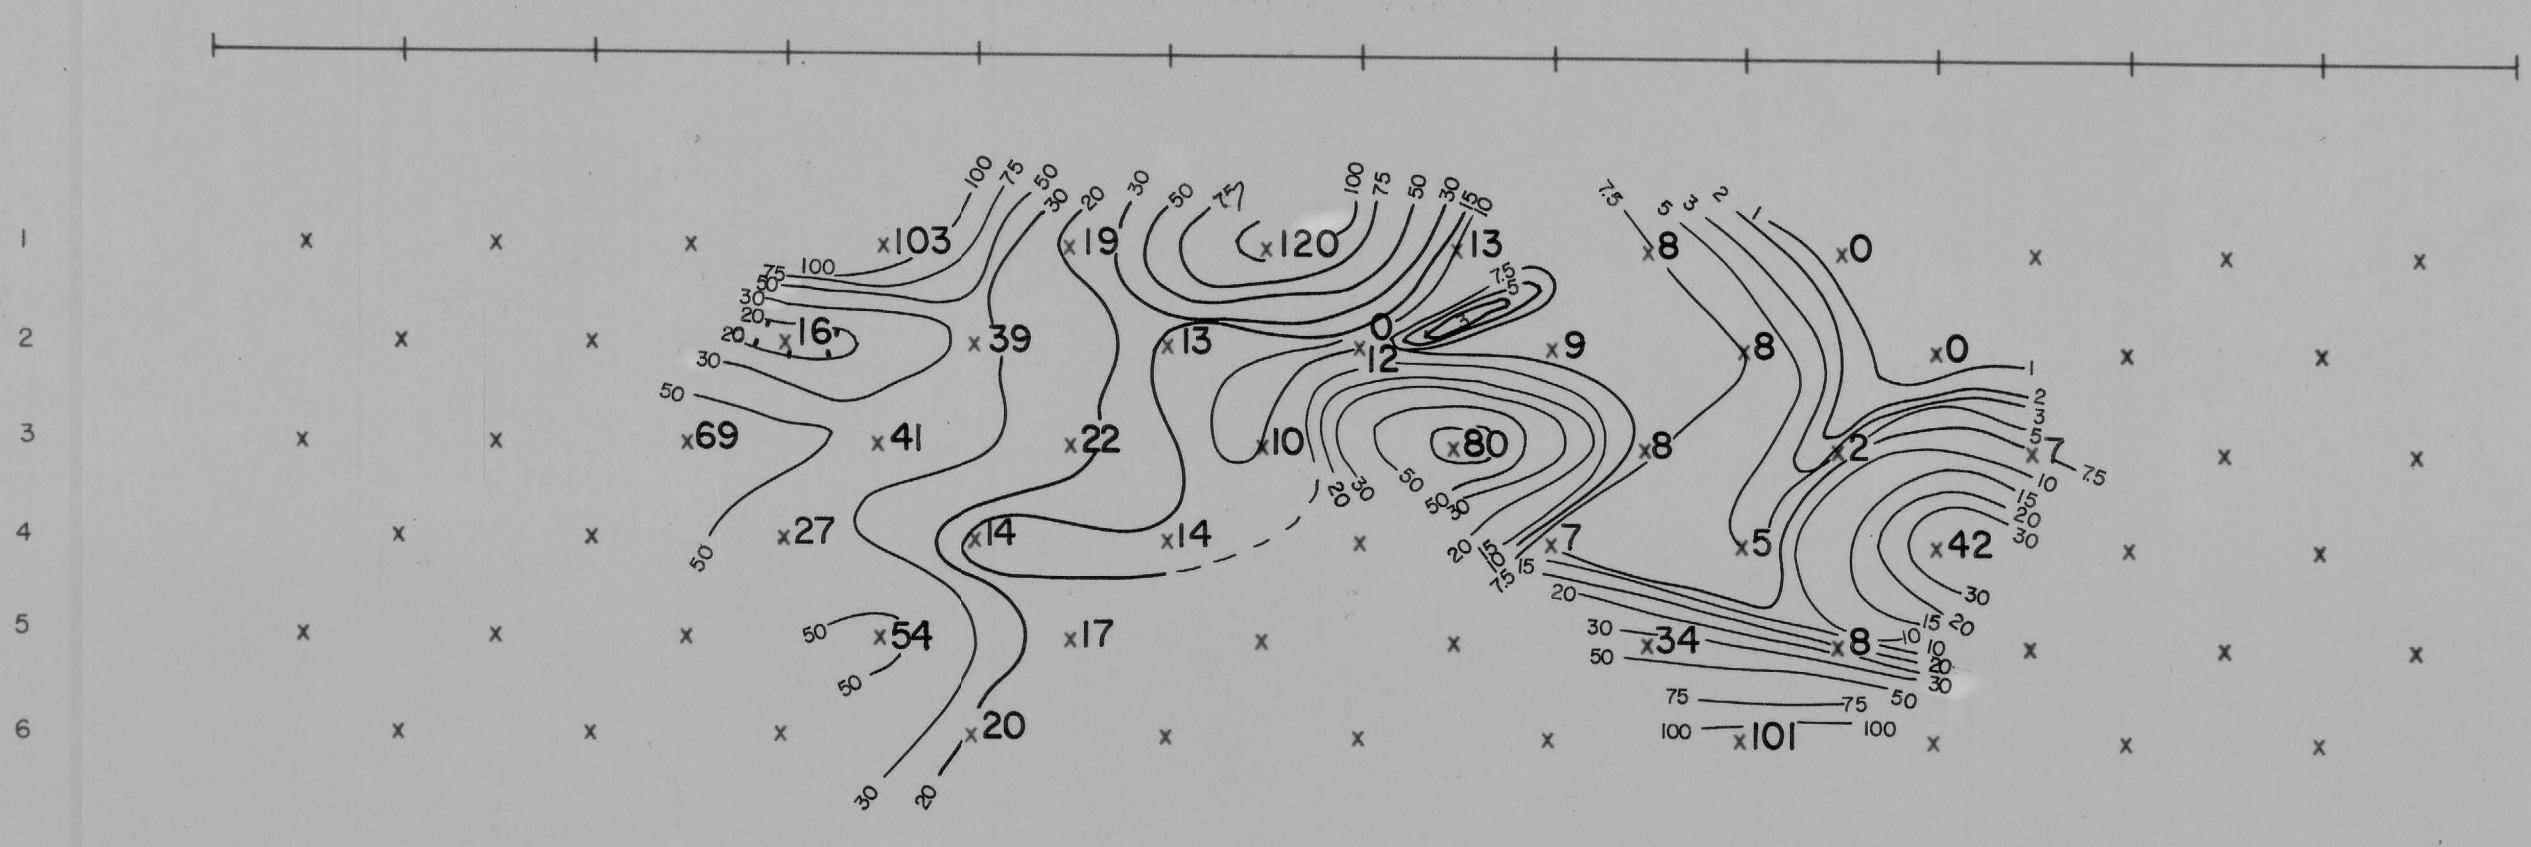
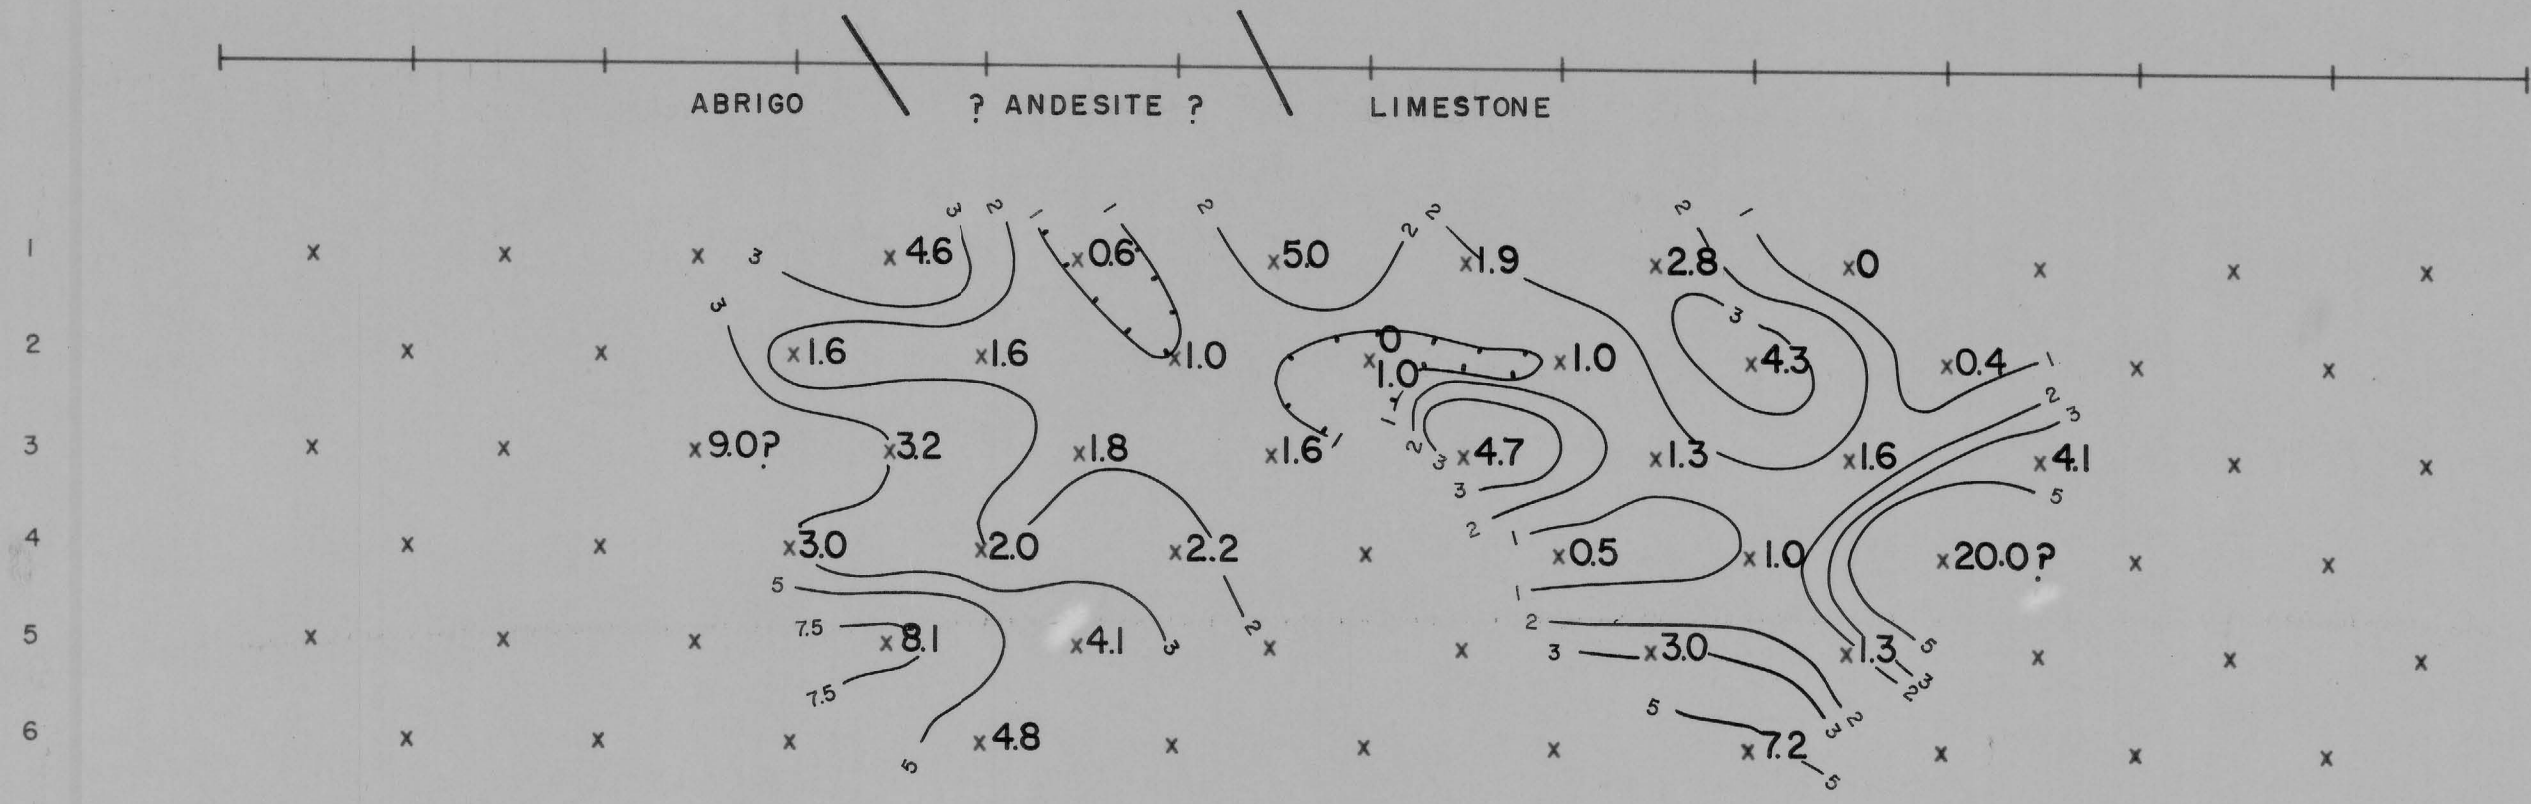


ELECTRODES
STATIONS
π INTERVAL BETWEEN
SENDER & RECEIVER DIPOLES

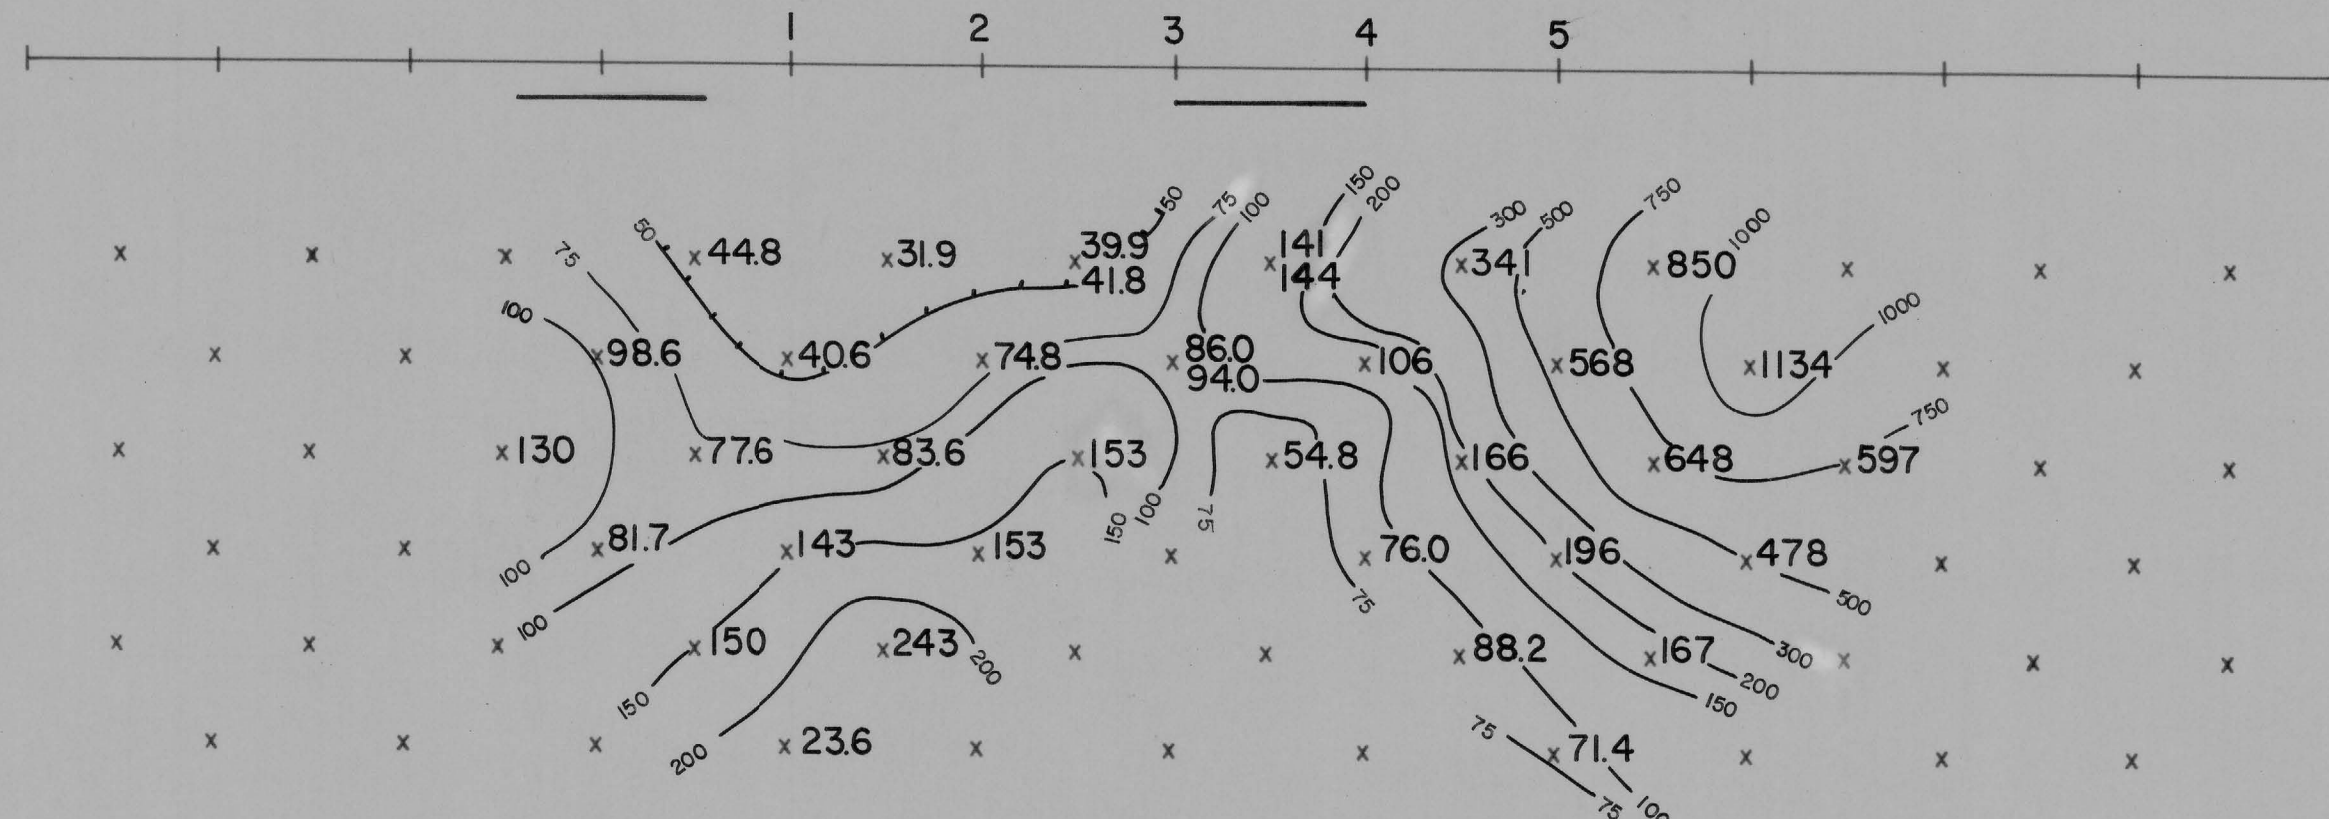


EXPLANATION

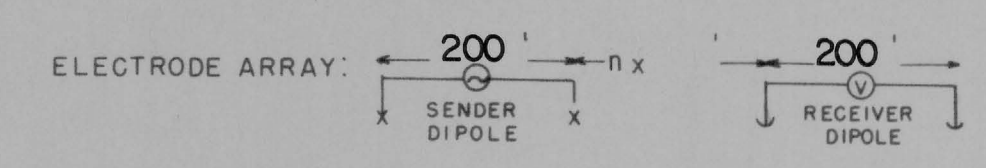

APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

RELATIVE ANOMALY STRENGTH

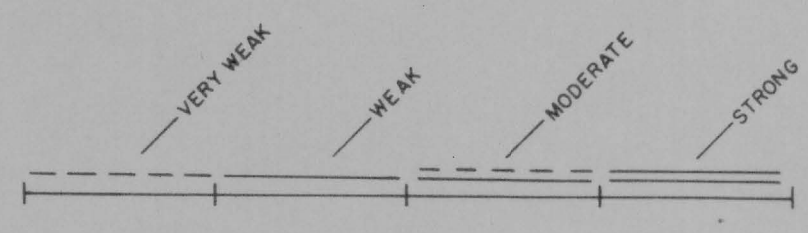

LOOKING NORTH

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

CHANCE MINE AREA

SECTIONAL DATA SHEET

LINE NO. 3

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 200'

DATE: DEC. 1964

FOR

DANIEL L.E. HUCKINS

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
($MCF = \frac{PFE \times 1000}{\rho_{DC} \frac{dV}{dI}}$)
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL
SURFACE PROFILE
GEOLOGY, ETC.