



CONTACT INFORMATION
Mining Records Curator
Arizona Geological Survey
3550 N. Central Ave, 2nd floor
Phoenix, AZ, 85012
602-771-1601
<http://www.azgs.az.gov>
inquiries@azgs.az.gov

The following file is part of the Anderson Mine Collection

ACCESS STATEMENT

These digitized collections are accessible for purposes of education and research. We have indicated what we know about copyright and rights of privacy, publicity, or trademark. Due to the nature of archival collections, we are not always able to identify this information. We are eager to hear from any rights owners, so that we may obtain accurate information. Upon request, we will remove material from public view while we address a rights issue.

CONSTRAINTS STATEMENT

The Arizona Geological Survey does not claim to control all rights for all materials in its collection. These rights include, but are not limited to: copyright, privacy rights, and cultural protection rights. The User hereby assumes all responsibility for obtaining any rights to use the material in excess of "fair use."

The Survey makes no intellectual property claims to the products created by individual authors in the manuscript collections, except when the author deeded those rights to the Survey or when those authors were employed by the State of Arizona and created intellectual products as a function of their official duties. The Survey does maintain property rights to the physical and digital representations of the works.

QUALITY STATEMENT


The Arizona Geological Survey is not responsible for the accuracy of the records, information, or opinions that may be contained in the files. The Survey collects, catalogs, and archives data on mineral properties regardless of its views of the veracity or accuracy of those data.

MINERALS EXPLORATION CO.

CASPER, WYOMING

AREA ANDERSON MINE		1206 162.65 N 89 084.64 E		HOLE NO. AM-1C
GRID POINT 1203,786 N 642,733 E		ELEVATION 1830		
COUNTY YAVAPAI		STATE ARIZONA		<u>GAMMA-GAMMA DENSITY</u>
SEC.	TWP. 11	RGE. 10		

BOREHOLE DATA		LOG DATA	
DATE	8-23-75	TOTAL DEPTH LOGGED	142 FT.
DRILLER	STEVE	TOTAL FOOTAGE LOGGED	142 FT.
DRILLER DEPTH	142 FT.	LOG SPEED	20 FT./MIN.
BIT SIZE	5 1/2 to 3 7/8 IN.	LOG SCALE	100 CPS/IN. I.C. 1
FLUID LEVEL	DRY FT.	DETECTOR TYPE	SCINT
CSG.	6'	DECENTRALIZED	<input checked="" type="checkbox"/>
REMARKS		SOURCE TYPE	Cs-137
		DETECTOR SIZE	1/2" x 1 1/2"
		CENTRALIZED	<input type="checkbox"/>
		SOURCE SIZE	125 Mc
		TRK. NO.	
		OPERATOR	D. BRADLEY

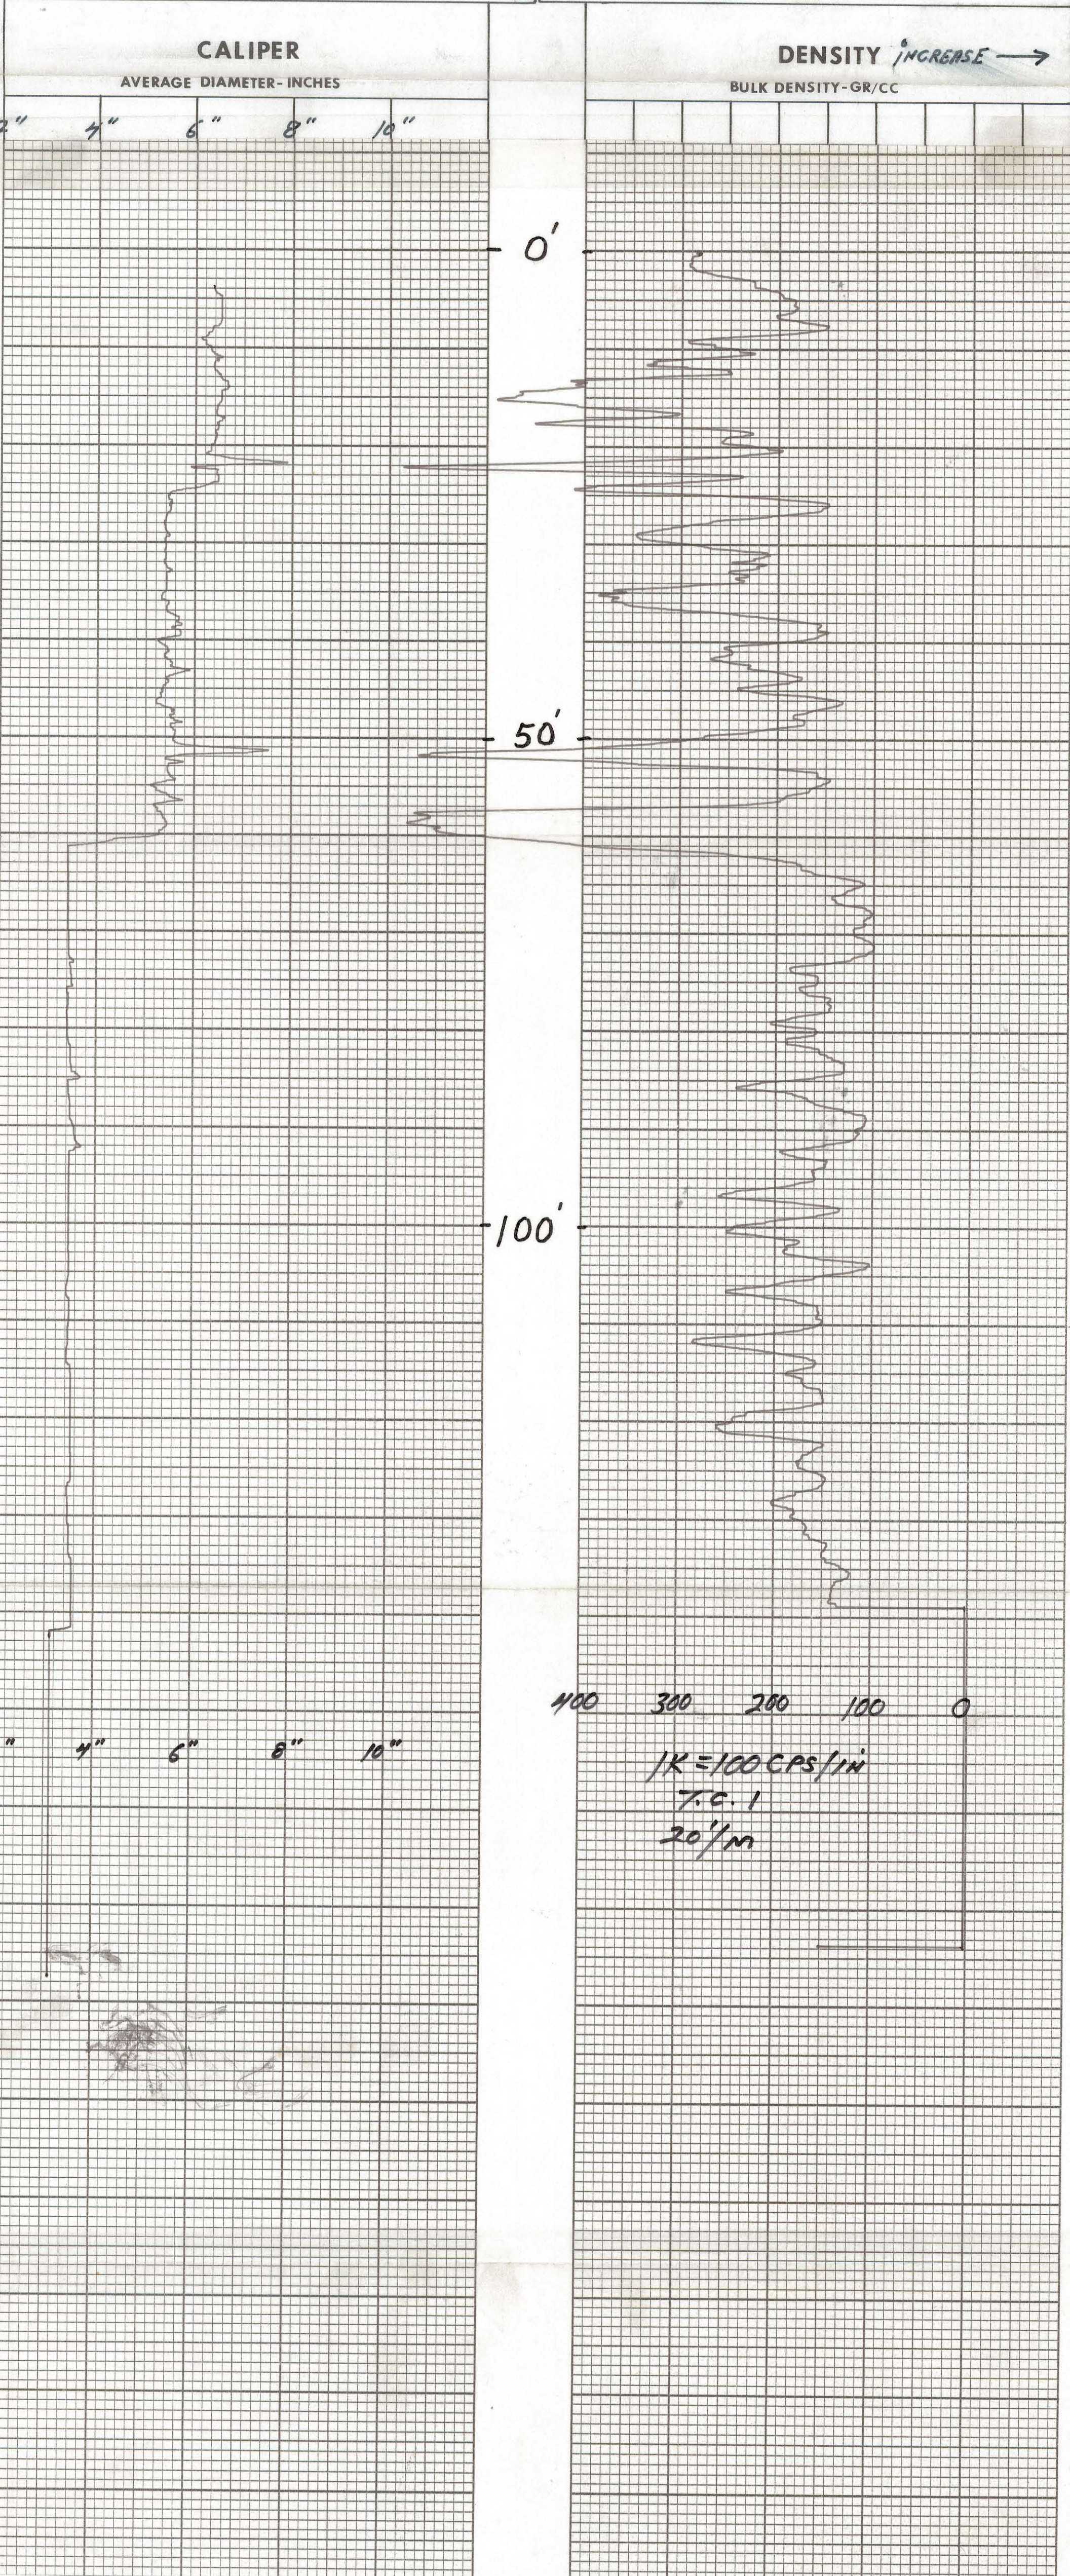


MINERALS EXPLORATION CO.

CASPER, WYOMING

1206162.65N
89 084.64E

HOLE NO. AM-1C


LOCATION <i>ANDERSON MINE</i>		GAMMA SCALE	<i>500</i>
COUNTY <i>YAVAPAI</i> STATE <i>ARIZONA</i>		PROBE TYPE	<i>SCINT</i>
GP. <i>1,203,786N</i> <i>642,733E</i>	ELEV. <i>1830</i>	K-FACTOR	<i>2.31 x 10⁻⁵</i>
SEC.	TWP. <i>11</i> RGE. <i>10</i>	DEAD TIME	<i>9.6 μSEC</i>
DATE	<i>3-23-75</i>	TIME CONSTANT	<i>1</i>
DEPTH DRILLED	<i>142'</i>	PROBE DIA.	<i>1 1/16"</i>
DEPTH LOGGED	<i>141'</i>	CALIPER	
FOOTAGE LOGGED	<i>206'</i>	DIRECTIONAL SURVEY	<i>-</i>
HOLE DIAMETER	<i>5" 0'-60' 3 7/8" 60'-142'</i>	TEMPERATURE	<i>-</i>
WATER FACTOR		OPERATOR	<i>D. BRADLEY</i>
RESISTIVITY	<i>-</i> OHMS/INCH	DRILLER	<i>STEVE</i>
SELF POTENTIAL	<i>-</i> M.V./IN.	CONTRACTOR	<i>UNIVERSAL</i>
RERUNS	1ST. RUN 2ND. RUN 3RD. RUN	LAST A.E.C. PIT RUN	<i>11-4-74</i>
BOTTOM	<i>120' 75' 10'</i>	FLUID LEVEL	<i>DRY</i>
TOP	<i>90' 50' 0'</i>	REMARKS:	
TOTAL FEET	<i>30' 25' 10'</i>		
SCALE RUN	<i>5K 5K 5K</i>		

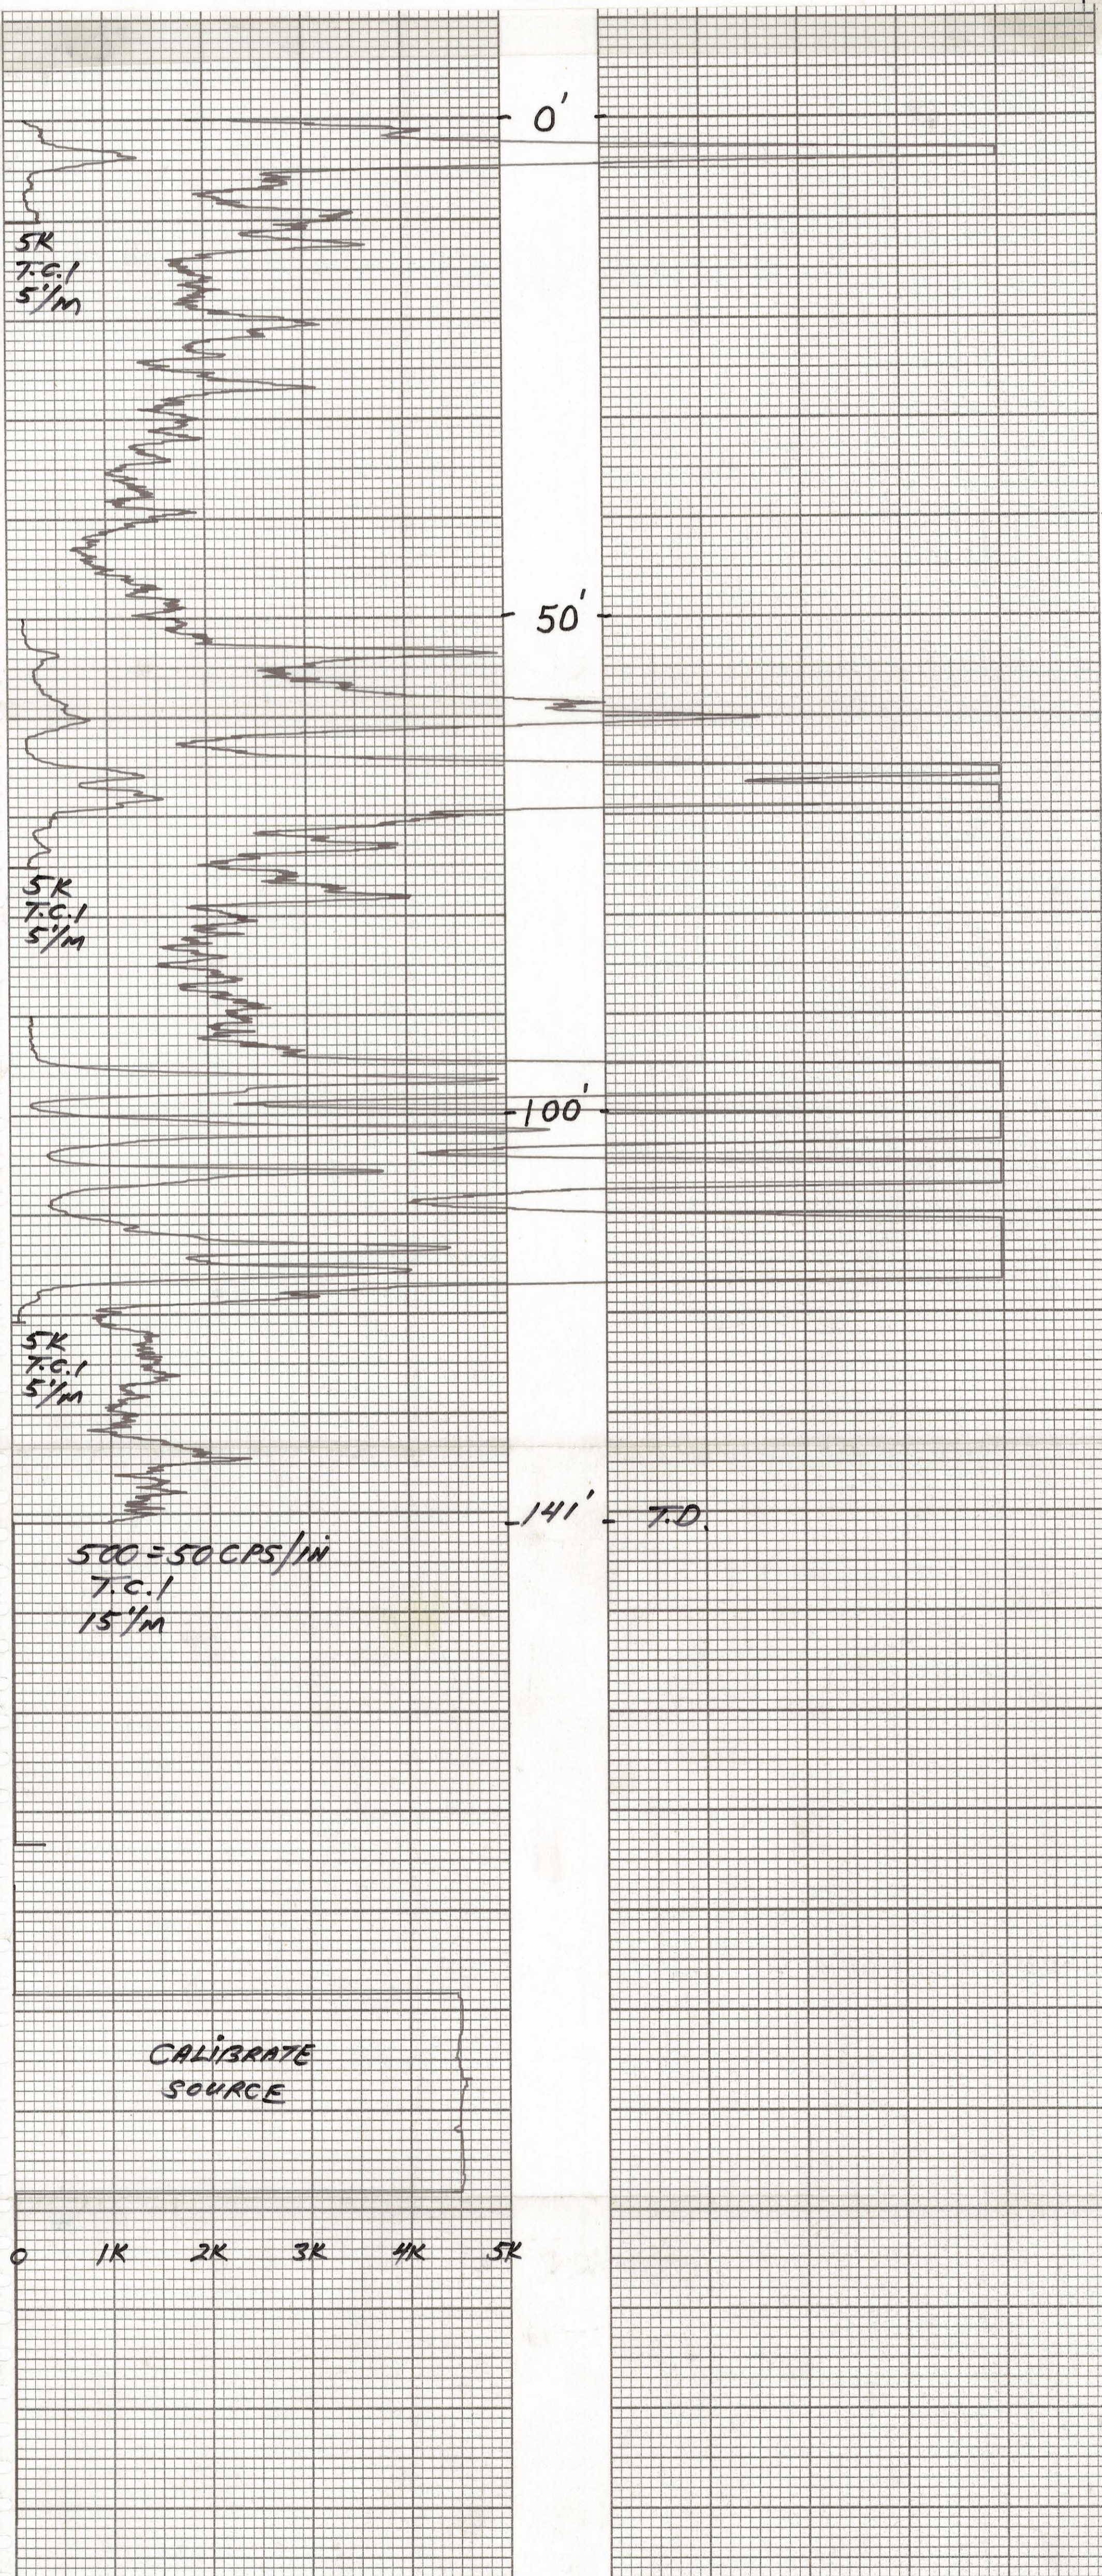

No. GC 12101
 PRINTED IN U.S.A.
 GRAPHIC CONTROLS CORPORATION BUFFALO, NEW YORK
 RECORDING CHARTS

AREA ANDERSON MINE		1206 159.78N 89 077.57E	
GRID POINT 1203, 782.5-N 442, 776.1-E		ELEVATION 1830	HOLE NO. AM-1
COUNTY YAVAPAI	STATE ARIZONA	<u>GAMMA-GAMMA DENSITY</u>	
SEC. 10	TWP. 11N		

BOREHOLE DATA		LOG DATA	
DATE	1-23-75	TOTAL DEPTH LOGGED	249' FT.
DRILLER	DAVE	TOTAL FOOTAGE LOGGED	249' FT.
DRILLER DEPTH	265 FT.	LOG SPEED	20 FT./MIN.
BIT SIZE	5" IN.	LOG SCALE	100 CPS/IN. T.C. 1.
FLUID LEVEL	187 FT.	DETECTOR TYPE	SCINT
CSG.		DETECTOR SIZE	1 1/2 x 1/2
REMARKS	CALIPER NOT OPEN	DECENTRALIZED	CENTRALIZED <input checked="" type="checkbox"/>
		SOURCE TYPE	CS-137
		TRK. NO.	29
		SOURCE SIZE	125 MC
		OPERATOR	D. BRADLEY

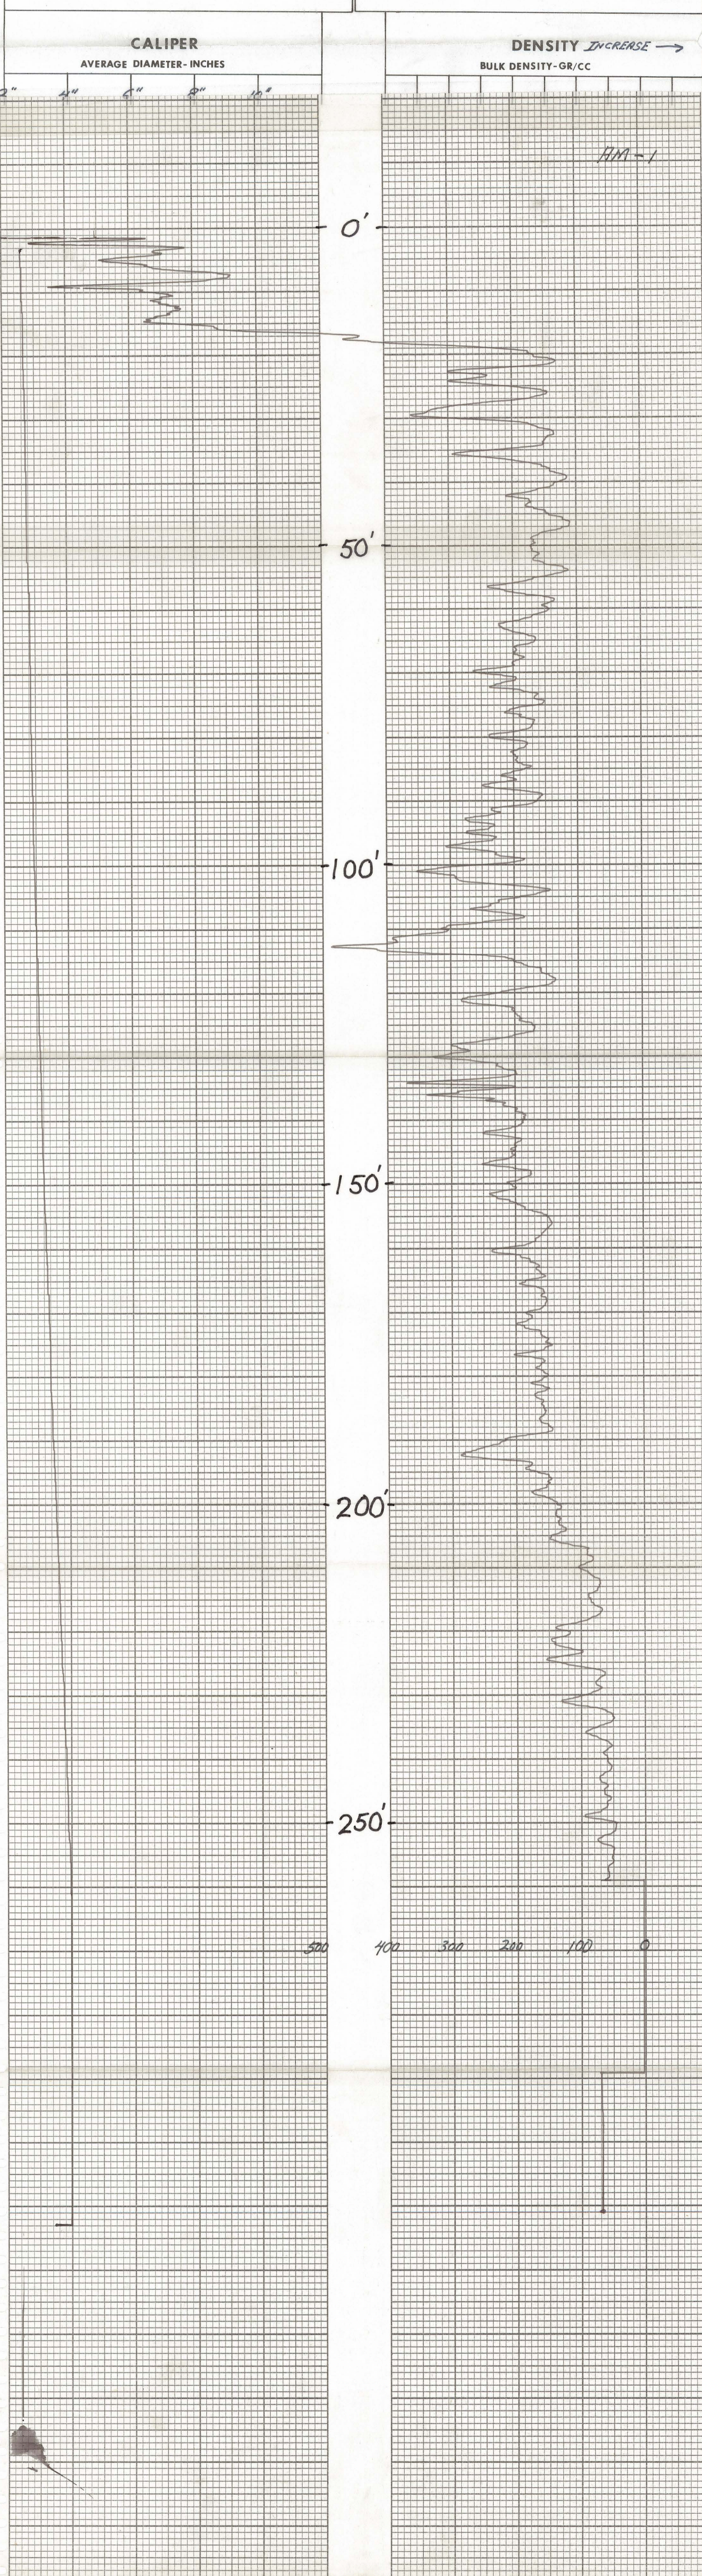


MINERALS EXPLORATION CO.

CASPER, WYOMING

1206 159.78N
89 077.59E

HOLE NO. *AM 1*

LOCATION <i>ANDERSON MINE</i>			GAMMA SCALE	<i>500</i>
COUNTY <i>YAVAPAI</i>	STATE <i>ARIZONA</i>		PROBE TYPE	<i>SCINT</i>
GP. <i>1,203,782.5 N</i> <i>642,726.1 E</i>	ELEV. <i>1830'</i>		K-FACTOR	<i>2.31 X 10⁻⁵</i>
SEC. <i>10</i>	TWP. <i>11N</i>	RGE. <i>10W</i>	DEAD TIME	<i>9.6 μSEC</i>
DATE	<i>1-23-75</i>		TIME CONSTANT	<i>1</i>
DEPTH DRILLED	<i>265'</i>		PROBE DIA.	<i>1 1/16</i>
DEPTH LOGGED	<i>265'</i>		CALIPER	
FOOTAGE LOGGED	<i>350'</i>		DIRECTIONAL SURVEY	<i>-</i>
HOLE DIAMETER	<i>4 3/4 5"</i>		TEMPERATURE	<i>-</i>
WATER FACTOR			OPERATOR	<i>D. BRADLEY</i>
RESISTIVITY	<i>10</i>	OHMS/INCH	DRILLER	<i>DAVE</i>
SELF POTENTIAL	<i>-</i>	M.V./IN.	CONTRACTOR	<i>BREEMAN</i>
RERUNS	1ST. RUN	2ND. RUN	3RD. RUN	LAST A.E.C. PIT RUN <i>11-4-74</i>
BOTTOM	<i>125'</i>	<i>10'</i>		FLUID LEVEL <i>187'</i>
TOP	<i>50'</i>	<i>0'</i>		REMARKS:
TOTAL FEET	<i>75'</i>	<i>10'</i>		
SCALE RUN	<i>5K</i>	<i>5K</i>		

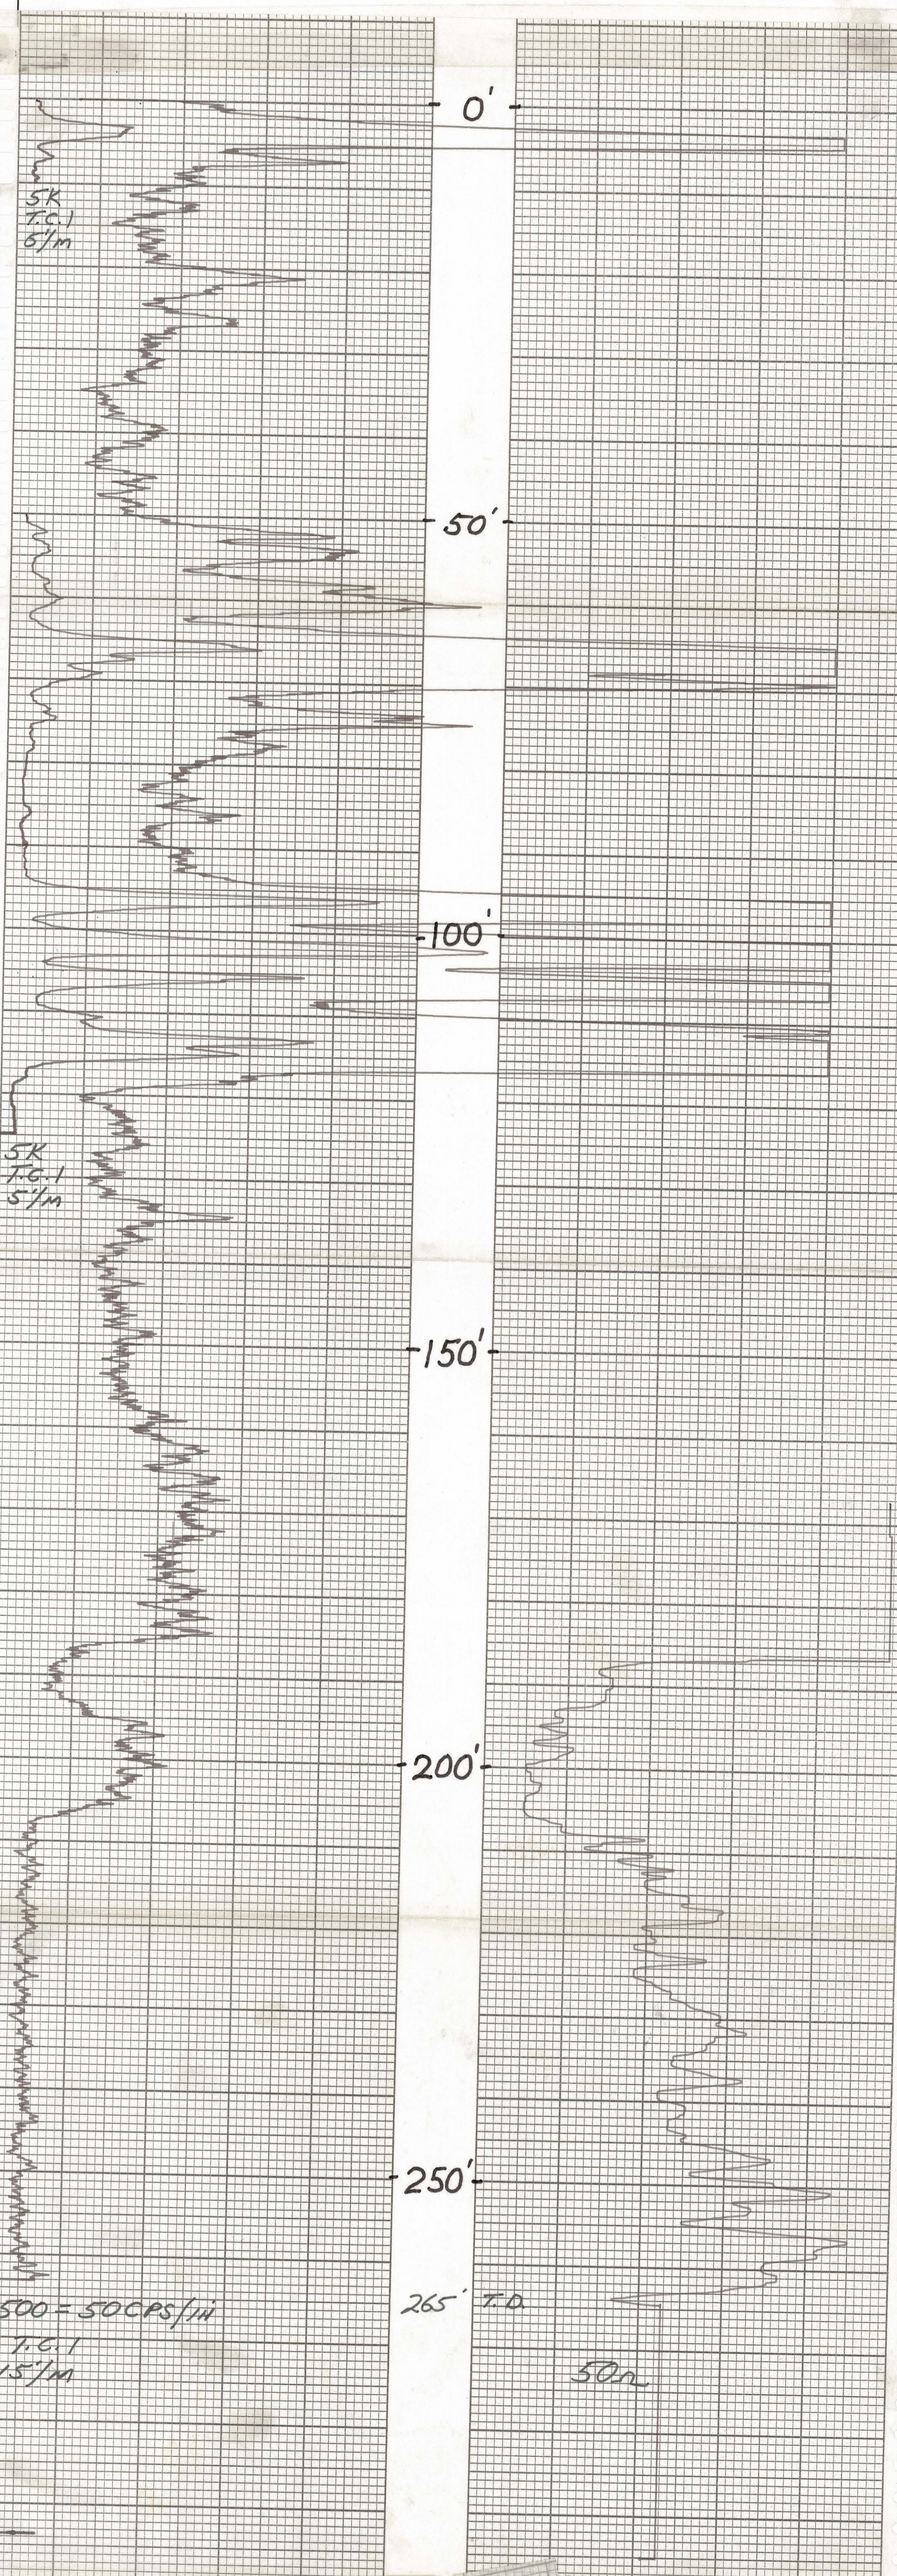


PRINTED IN U.S.A. BUFFALO, NEW YORK GRAPHIC CONTROLS CORPORATION BUFFALO, NEW YORK NO. GC 12101 RECORDING CHARTS

MINERALS EXPLORATION CO.

CASPER, WYOMING


HOLE NO. AM 2C

LOCATION ANDERSON MINE				GAMMA SCALE	500=50CPI
COUNTY YAVAPAI		STATE AZ		PROBE TYPE	SCINT
GP.		ELEV.		K-FACTOR	6.01 E-5
SEC.	TWP.	RGE.		DEAD TIME	9.2 μS
DATE	11-9-77			TIME CONSTANT	1 SEC
DEPTH DRILLED	89			PROBE DIA.	1 5/8"
DEPTH LOGGED	89			CALIPER	
FOOTAGE LOGGED	114			DIRECTIONAL SURVEY	
HOLE DIAMETER	4"			TEMPERATURE	
WATER FACTOR	1.12			OPERATOR	ERIC
RESISTIVITY	OHMS/INCH			DRILLER	
SELF POTENTIAL	M.V./IN.			CONTRACTOR	BOYLES
RERUNS	1ST. RUN	2ND. RUN	3RD. RUN	LAST A.E.C. PIT RUN	8-31-77
BOTTOM	88			FLUID LEVEL	
TOP	63			REMARKS:	
TOTAL FEET	25				
SCALE RUN	5K=500CPI				

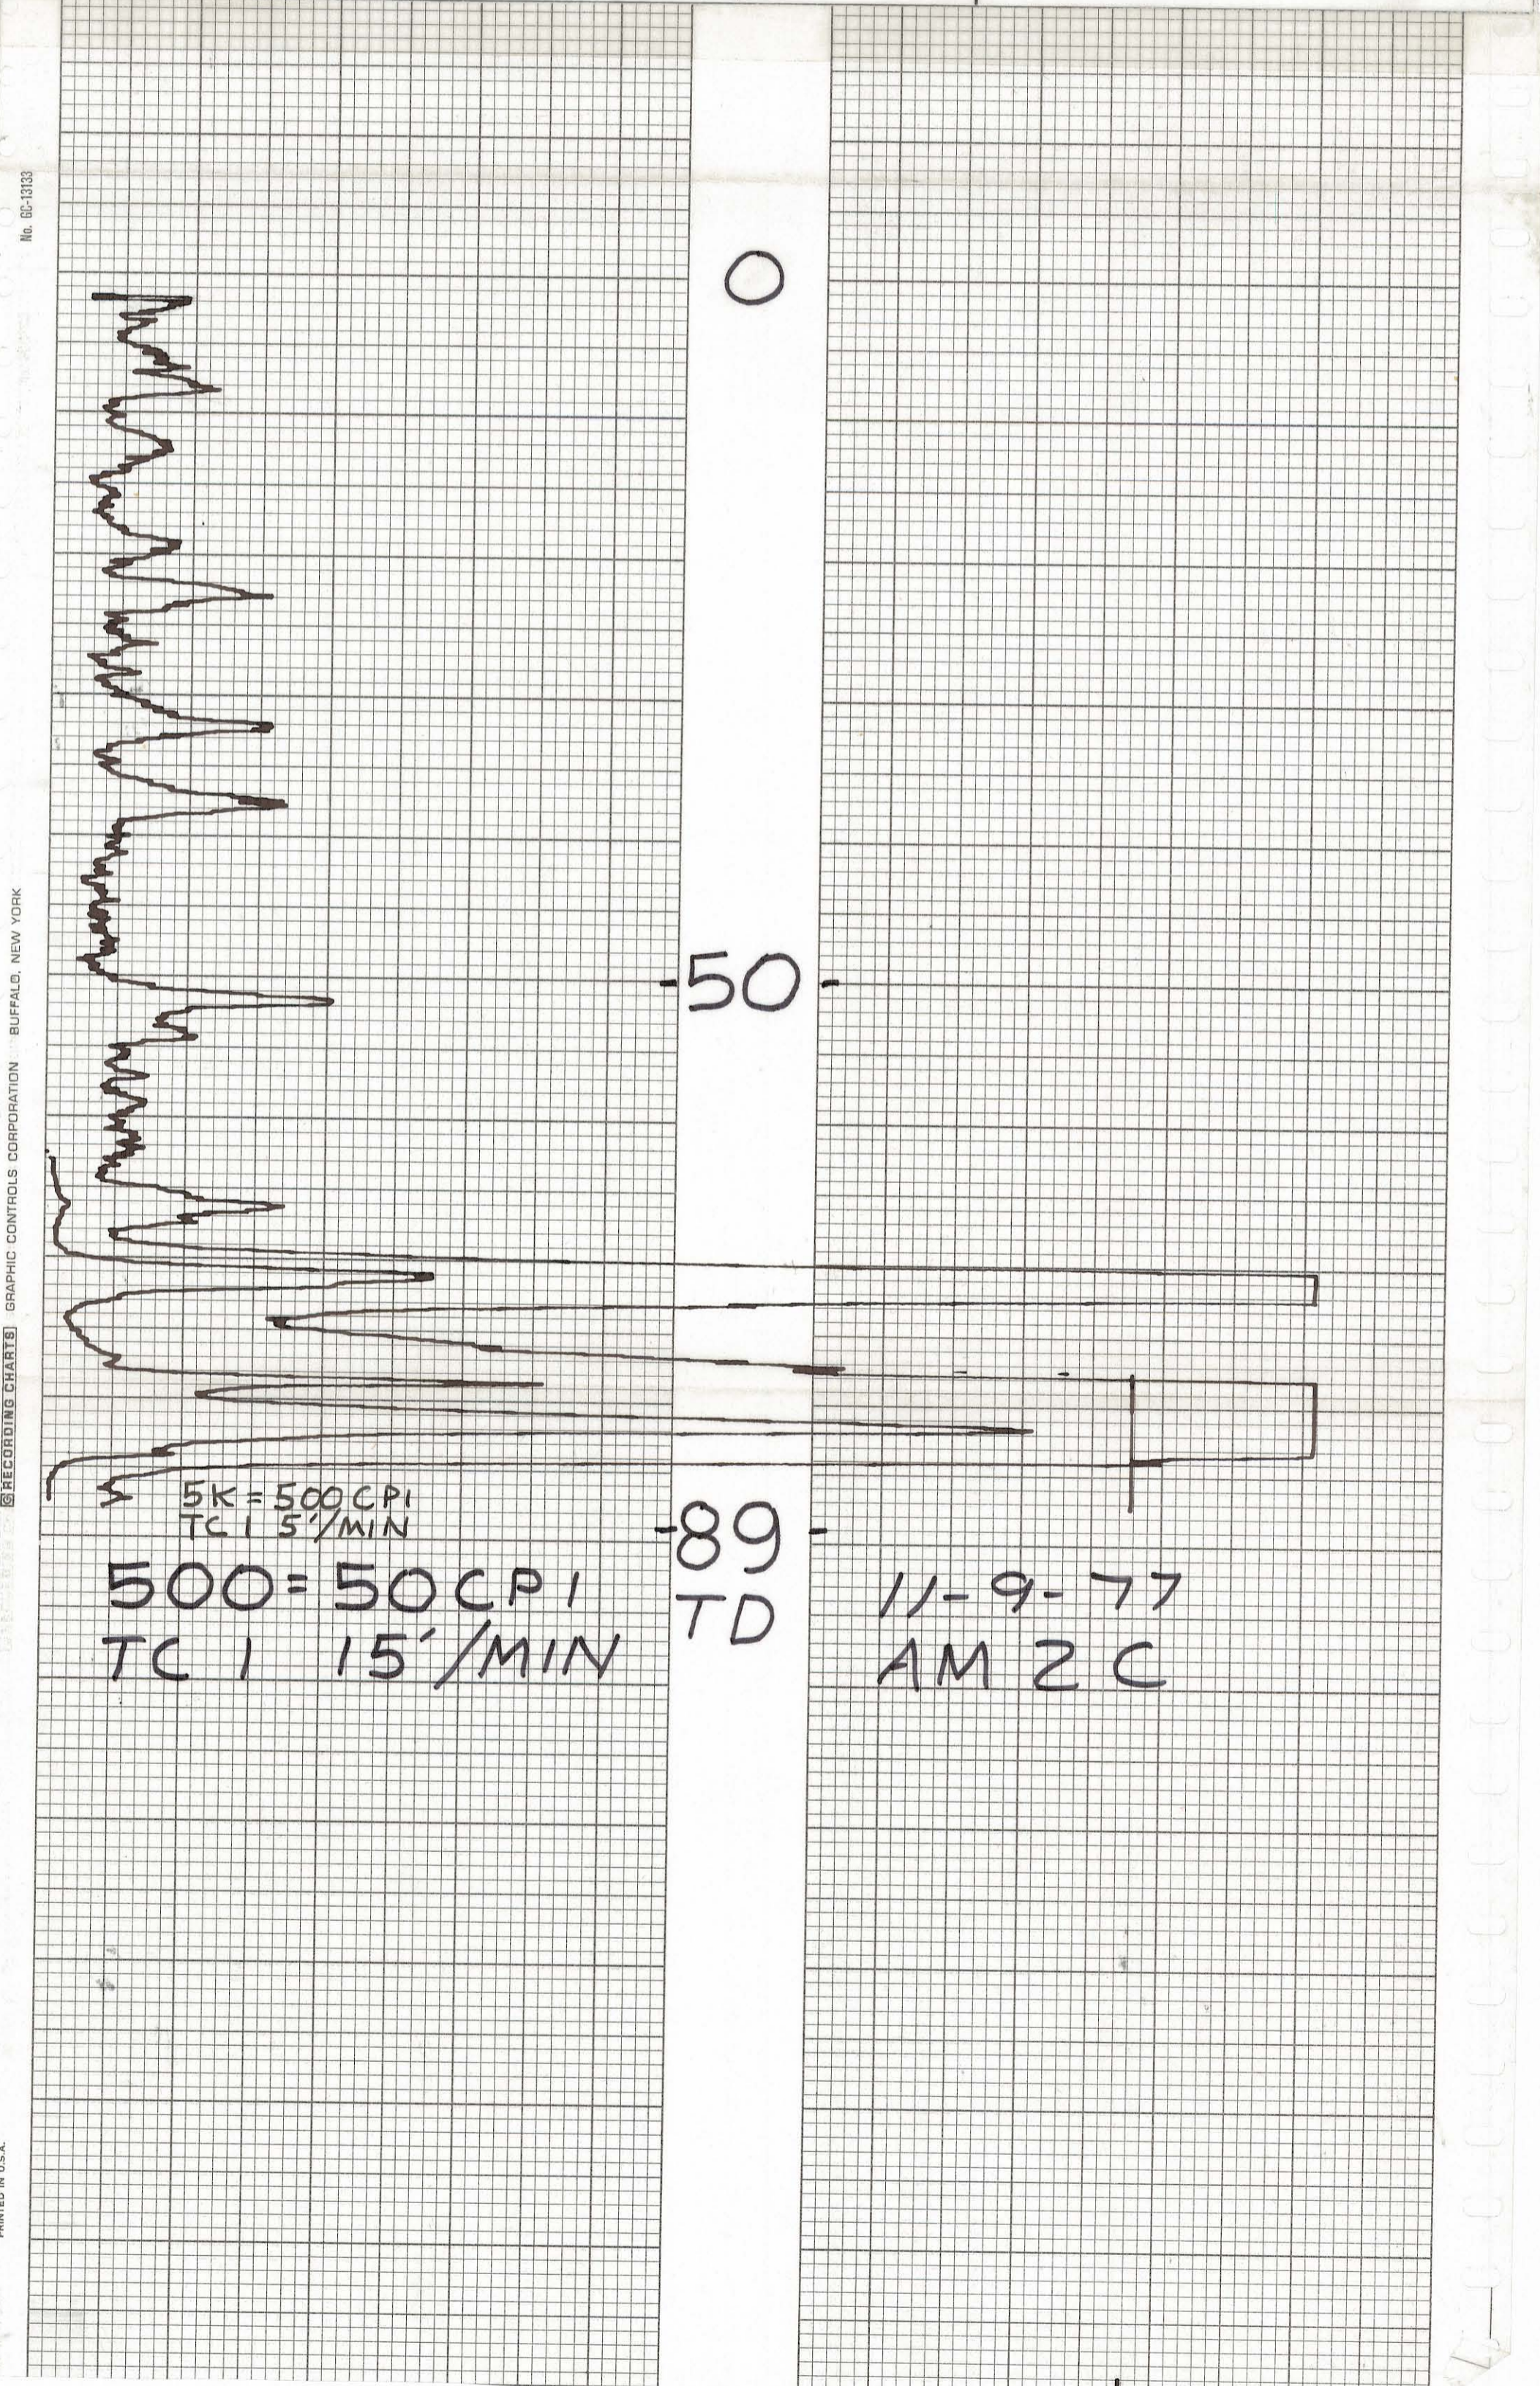

AREA <i>ANDERSON MINE</i> <i>1206568.12N</i> <i>89117.93E</i>		HOLE NO. <i>AM-2</i>
GRID POINT <i>642,758.7E</i> <i>1204,191.6N</i>	ELEVATION <i>1818'</i>	
COUNTY <i>YAVAPAI</i>	STATE <i>ARIZONA</i>	<u>GAMMA - GAMMA DENSITY</u>
SEC. <i>10</i>	TWP. <i>11N</i> RGE. <i>10W</i>	

BOREHOLE DATA		LOG DATA	
DATE	<i>1-24-75</i>	TOTAL DEPTH LOGGED	<i>126'</i> FT.
DRILLER	<i>DAVE</i>	TOTAL FOOTAGE LOGGED	<i>122'</i> FT.
DRILLER DEPTH	<i>125</i> FT.	LOG SPEED	<i>20</i> FT./MIN.
BIT SIZE	<i>4 7/8</i> IN.	LOG SCALE	<i>100</i> CPS/IN. T.C. <i>1</i>
FLUID LEVEL	<i>DRY</i> FT.	DETECTOR TYPE	<i>SCINT</i> DETECTOR SIZE <i>1 1/2 x 1/2</i>
CSG.		DECENTRALIZED	<input checked="" type="checkbox"/> CENTRALIZED
REMARKS		SOURCE TYPE	<i>Cs137</i> SOURCE SIZE <i>125 Mc</i>
		TRK. NO.	<i>29</i>
		OPERATOR	<i>D. BRADLEY</i>

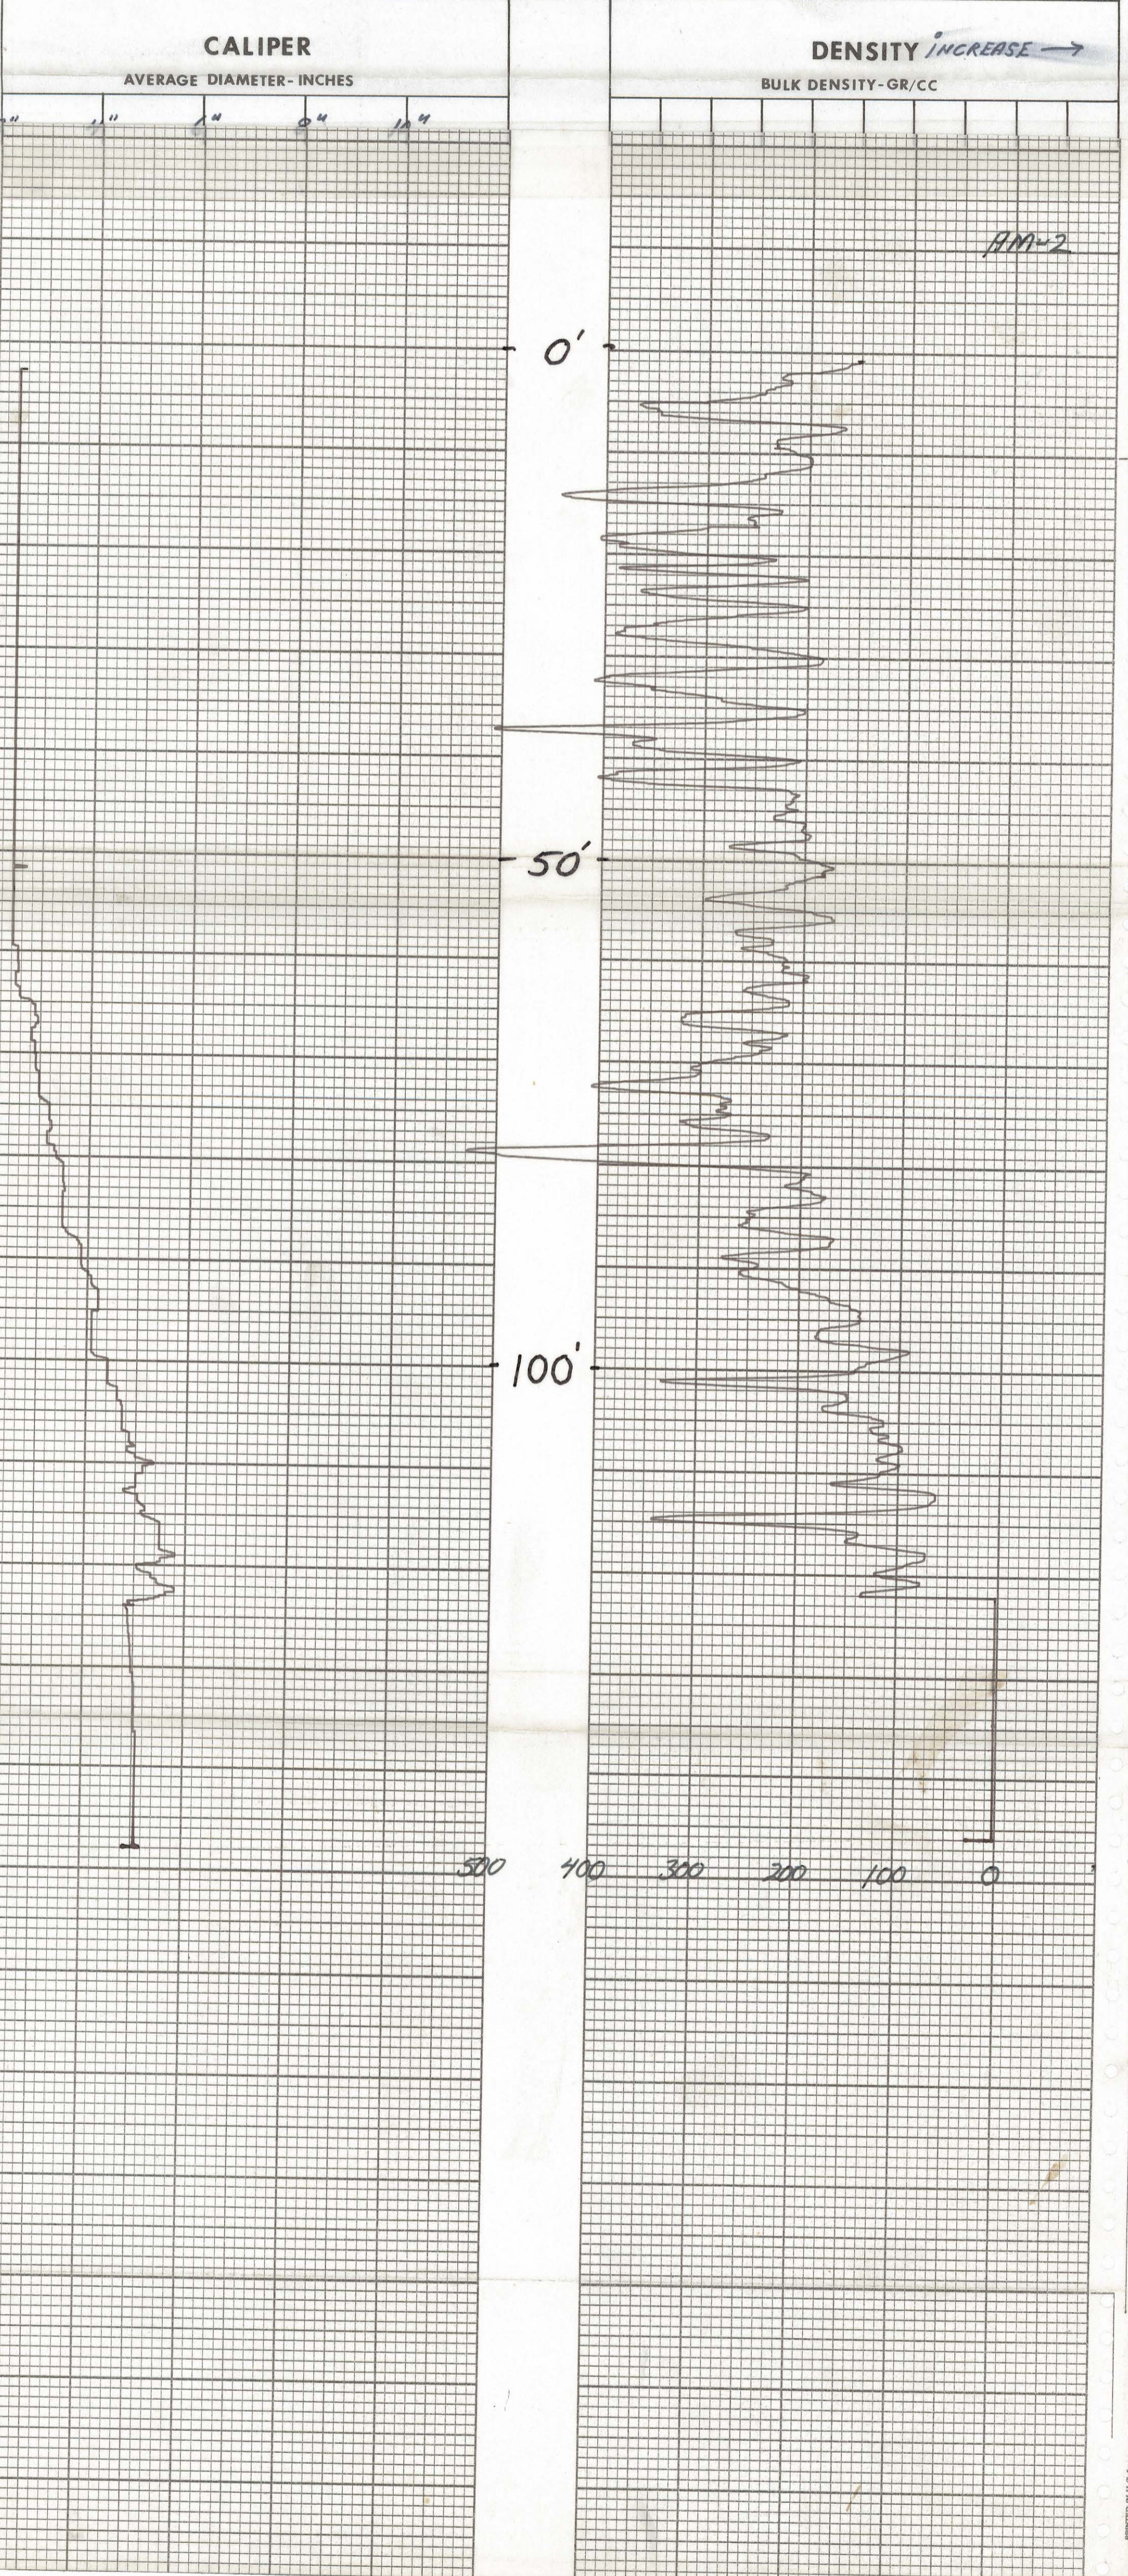


MINERALS EXPLORATION CO.

CASPER, WYOMING


HOLE NO. *AM-2*

LOCATION <i>ANDERSON MINE</i> <i>1206 568.12N</i> <i>89 117.93E</i>		GAMMA SCALE	<i>500</i>
COUNTY <i>YAVAPAI</i>	STATE <i>ARIZONA</i>	PROBE TYPE	<i>SCINT</i>
GP. <i>1,204,191.6-N</i> <i>642,758.7-E</i>	ELEV. <i>1307' 1818'</i>	K-FACTOR	<i>2.31 X 10⁻⁵</i>
SEC. <i>10</i>	TWP. <i>11N</i>	DEAD TIME	<i>9.6 MSEC</i>
	RGE. <i>10W</i>	TIME CONSTANT	<i>1</i>
DATE	<i>1-24-74</i>	PROBE DIA.	<i>1 1/16"</i>
DEPTH DRILLED	<i>125</i>	CALIPER	
DEPTH LOGGED	<i>127</i>	DIRECTIONAL SURVEY	<i>-</i>
FOOTAGE LOGGED	<i>157'</i>	TEMPERATURE	<i>-</i>
HOLE DIAMETER	<i>4 1/8"</i>	OPERATOR	<i>D. BRADLEY</i>
WATER FACTOR		DRILLER	<i>DAVE</i>
RESISTIVITY	<i>-</i>	CONTRACTOR	<i>BEEMAN</i>
SELF POTENTIAL	<i>-</i>	OHMS/INCH	
RERUNS	1ST. RUN	M.V./IN.	
BOTTOM	<i>90'</i>	LAST A.E.C. PIT RUN	<i>11-4-74</i>
TOP	<i>60'</i>	FLUID LEVEL	<i>DRY</i>
TOTAL FEET	<i>30'</i>	REMARKS:	
SCALE RUN	<i>5K</i>		

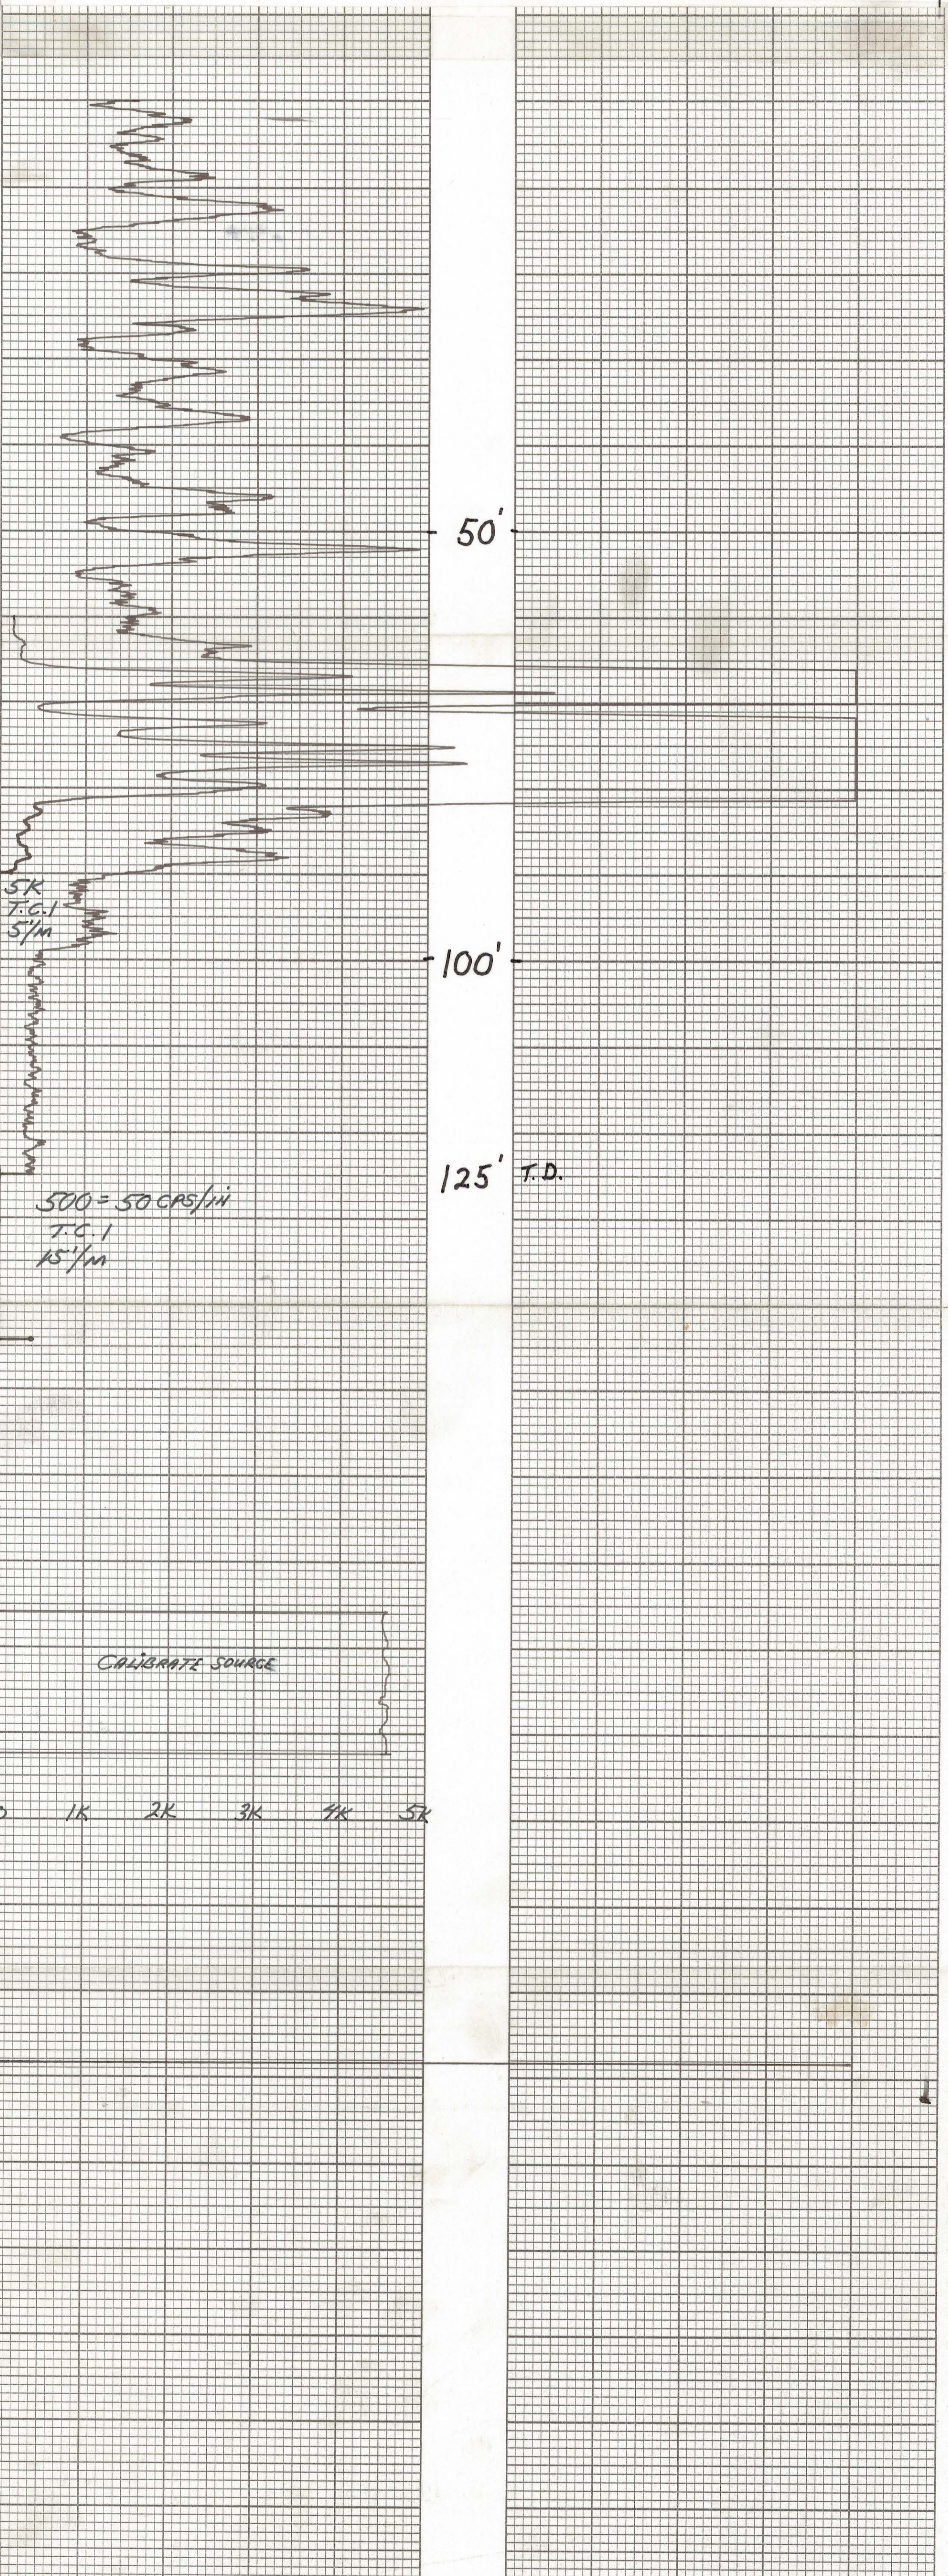

AREA <i>ANDERSON MINE</i>		1206179.93N 89403.00E		HOLE NO. <i>AM-3</i>
GRID POINT <i>1203808.7N 643,051.1E</i>		ELEVATION <i>1848'</i>		
COUNTY <i>YAVAPAI</i>		STATE <i>ARIZONA</i>		<u>GAMMA - GAMMA DENSITY</u>
SEC. <i>10</i>	TWP. <i>11N</i>	RGE. <i>10W</i>		

BOREHOLE DATA		LOG DATA	
DATE	<i>1-25-75</i>	TOTAL DEPTH LOGGED	<i>211</i> FT.
DRILLER	<i>DAVE</i>	TOTAL FOOTAGE LOGGED	<i>211</i> FT.
DRILLER DEPTH	<i>215</i> FT.	LOG SPEED	<i>20</i> FT./MIN.
BIT SIZE	<i>5"</i> IN.	LOG SCALE	<i>50</i> CPS/IN. T.C. <i>1</i>
FLUID LEVEL	<i>176'</i> FT.	DETECTOR TYPE	<i>SCINT</i> DETECTOR SIZE <i>1/2x1/2</i>
CSG.		DECENTRALIZED	<input checked="" type="checkbox"/> CENTRALIZED
REMARKS		SOURCE TYPE	<i>Cs 137</i> SOURCE SIZE <i>125 Mc</i>
		TRK. NO.	<i>29</i>
		OPERATOR	<i>BRADLEY</i>

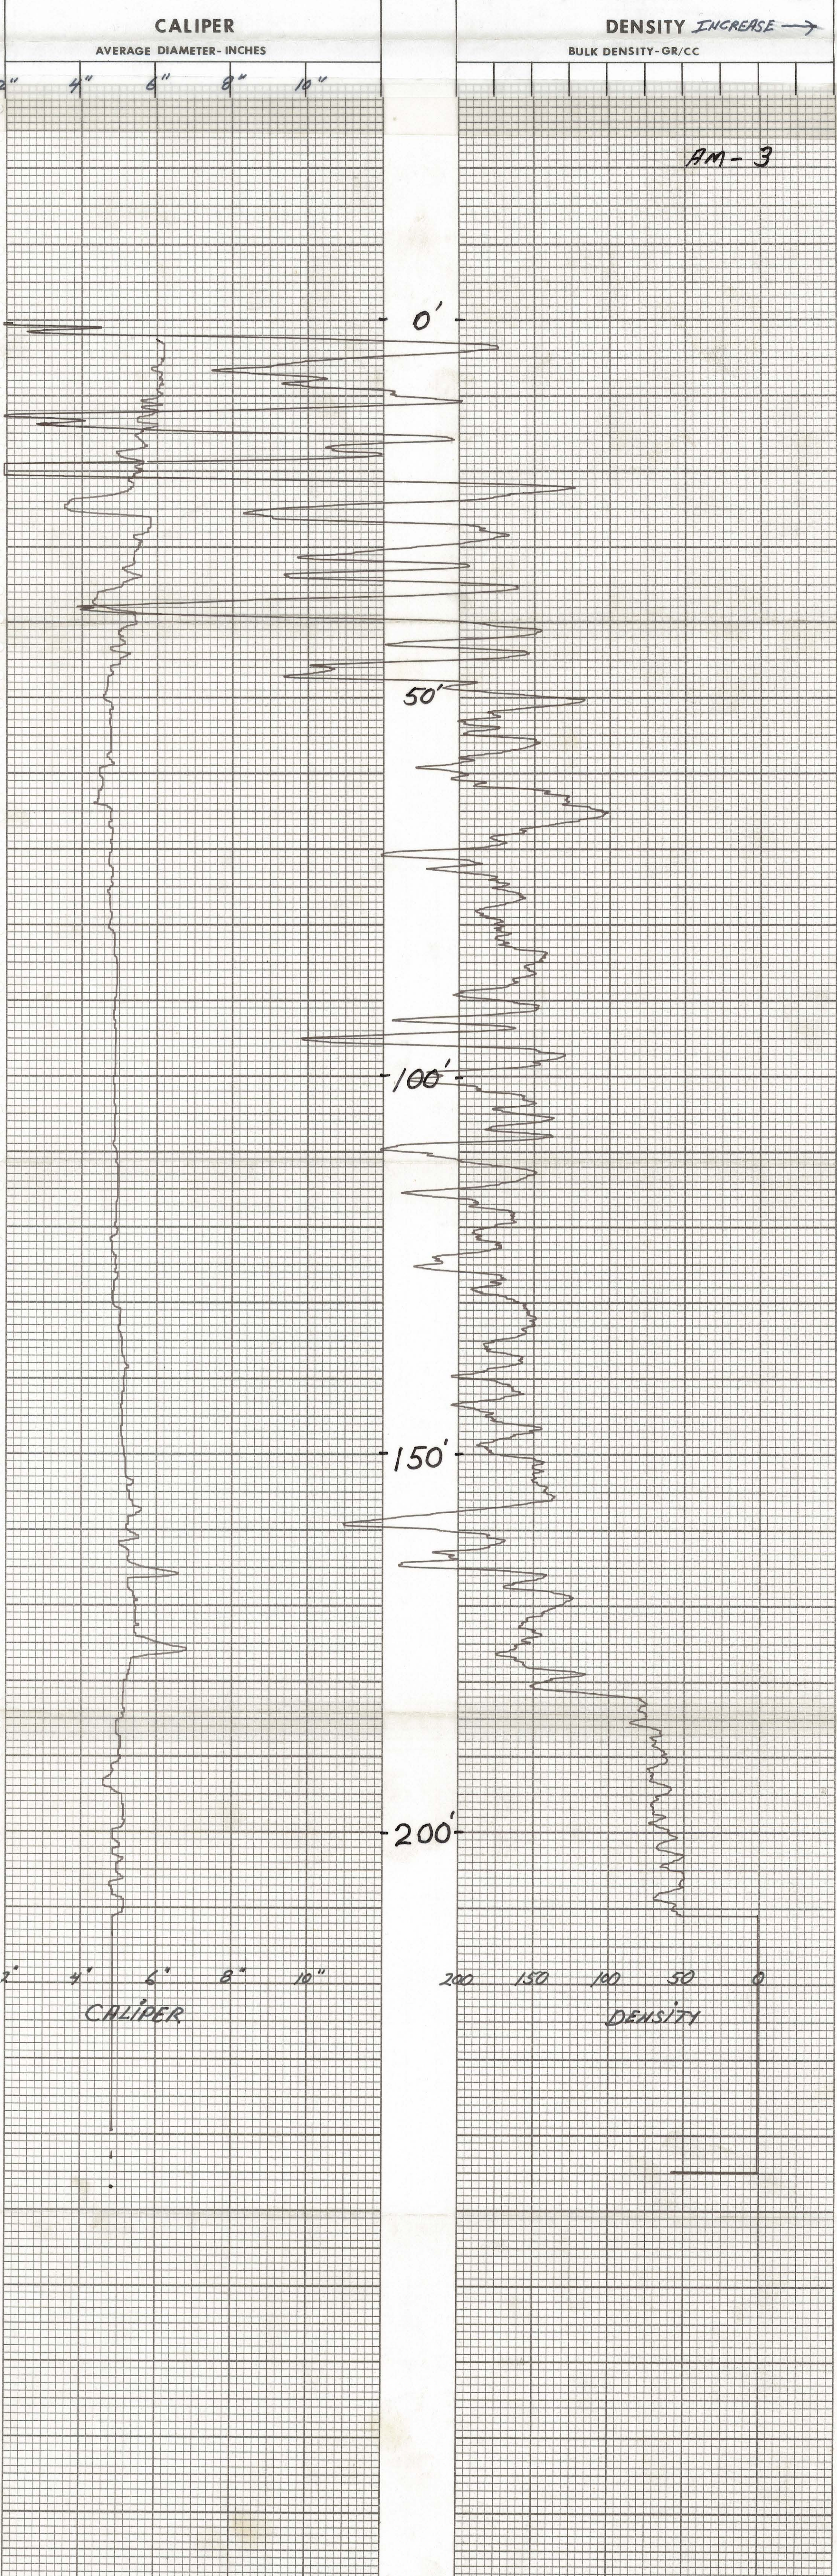


MINERALS EXPLORATION CO.

CASPER, WYOMING

HOLE NO. *AM-3*


LOCATION <i>ANDERSON MINE</i>			GAMMA SCALE	<i>500</i>
COUNTY <i>YAVAPAI</i>	STATE <i>ARIZONA</i>		PROBE TYPE	<i>SCINT</i>
GP. <i>1203,808.7 N</i>	<i>1206 179.93 N</i>	ELEV. <i>1848'</i>	K-FACTOR	<i>2.31 X 10⁻⁵</i>
<i>643,051.1 E</i>	<i>89,403.80 E</i>		DEAD TIME	<i>9.6 MSEC.</i>
SEC. <i>10</i>	TWP. <i>11N</i>	RGE. <i>10W</i>	TIME CONSTANT	<i>1</i>
DATE	<i>1-25-75</i>		PROBE DIA.	<i>1 1/4"</i>
DEPTH DRILLED	<i>215'</i>		CALIPER	
DEPTH LOGGED	<i>215'</i>		DIRECTIONAL SURVEY	<i>-</i>
FOOTAGE LOGGED	<i>297'</i>		TEMPERATURE	<i>-</i>
HOLE DIAMETER	<i>5"</i>		OPERATOR	<i>D. BRADLEY</i>
WATER FACTOR	<i>1.152</i>		DRILLER	<i>DAVE</i>
RESISTIVITY	<i>10</i>		CONTRACTOR	<i>BEEMAN</i>
SELF POTENTIAL	<i>-</i>		LAST A.E.C. PIT RUN	<i>11-4-74</i>
RERUNS	1ST. RUN	2ND. RUN	3RD. RUN	FLUID LEVEL <i>180'</i>
BOTTOM	<i>180'</i>	<i>150'</i>	<i>120'</i>	REMARKS:
TOP	<i>173'</i>	<i>140'</i>	<i>55'</i>	
TOTAL FEET	<i>7'</i>	<i>10'</i>	<i>65'</i>	
SCALE RUN	<i>5K</i>	<i>5K</i>	<i>5K</i>	

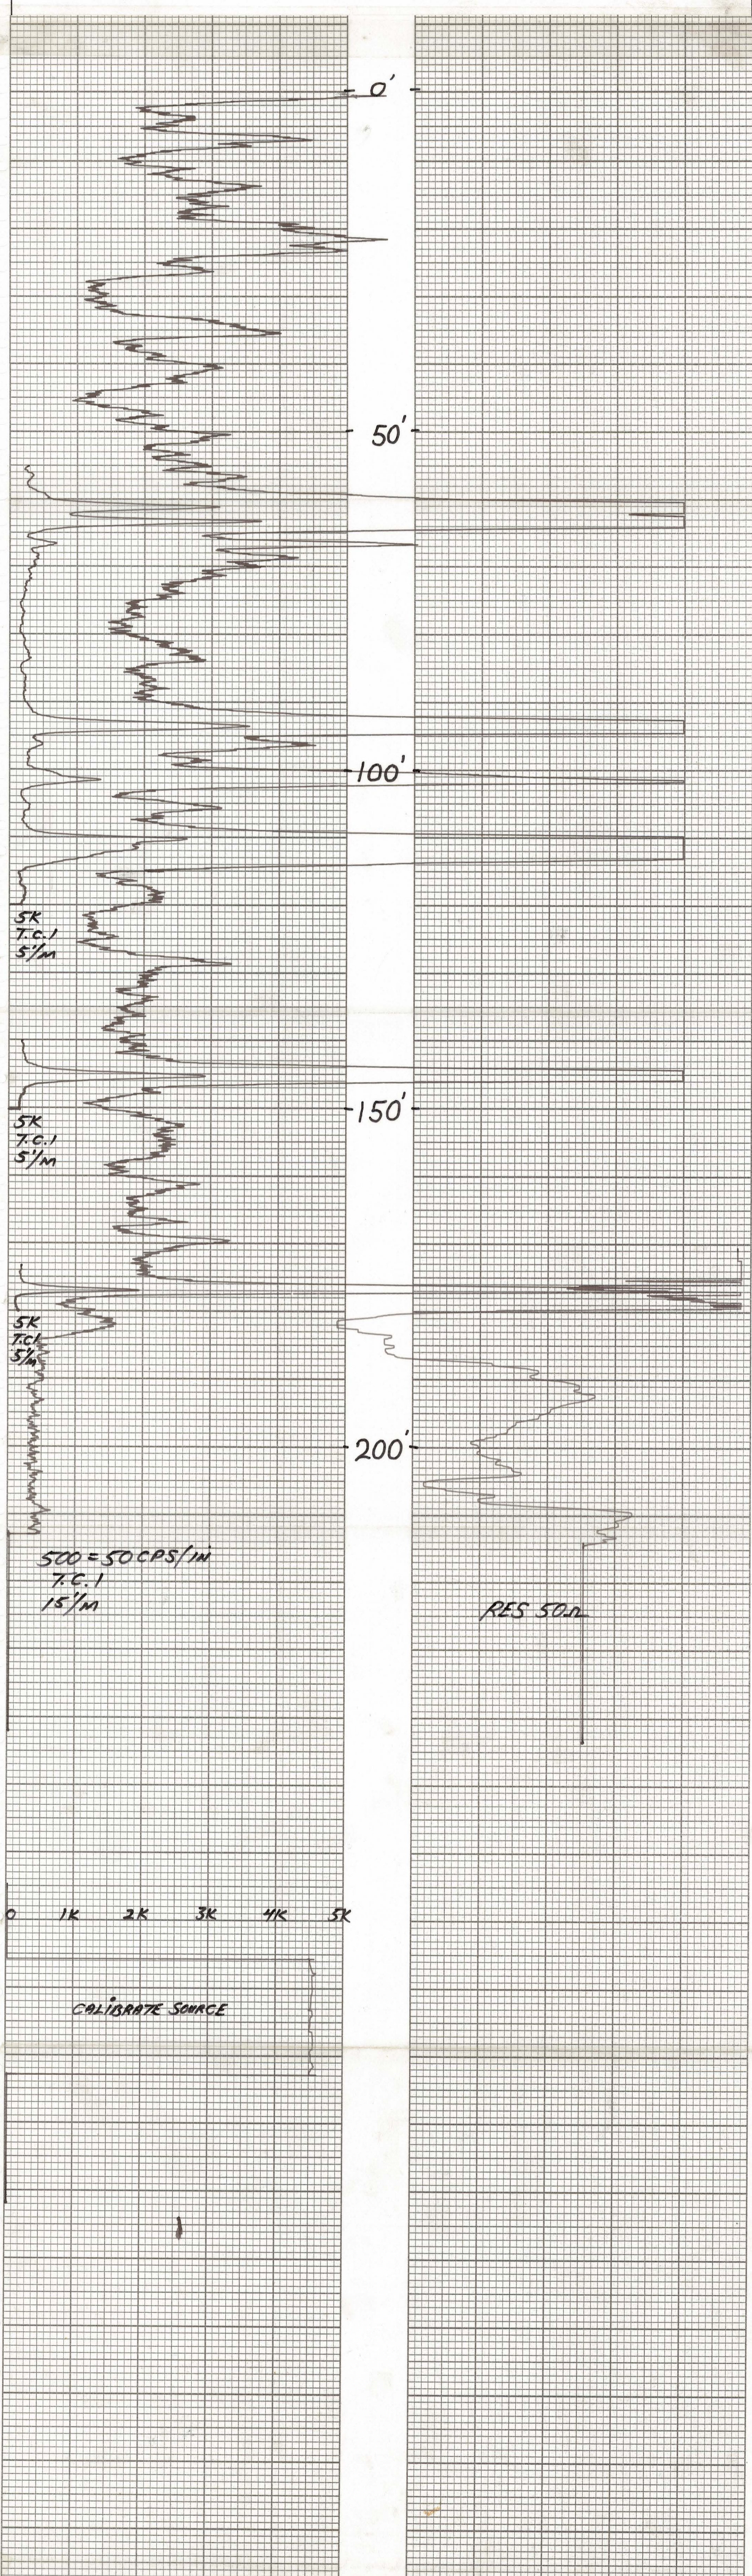

RECORDED (CHARTS) GRAPHIC CONTROLS CORPORATION BUFFALO, NEW YORK
 PRINTED IN U.S.A.
 NO. GC 12101

AREA <i>ANDERSON MINE</i>		<i>1206 266.12 N</i>		HOLE NO. <i>AM-4</i>
GRID POINT <i>1203 876.1 N</i>		<i>88 386.38 E</i>		
COUNTY <i>YAVAPAI</i>		STATE <i>ARIZONA</i>		GAMMA - GAMMA DENSITY
SEC. <i>10</i>	TWP. <i>11 N</i>	RGE. <i>10 W</i>		
ELEVATION <i>1812</i>				

BOREHOLE DATA		LOG DATA	
DATE	<i>1-26-75</i>	TOTAL DEPTH LOGGED	<i>252</i> FT.
DRILLER	<i>STEVE</i>	TOTAL FOOTAGE LOGGED	<i>252</i> FT.
DRILLER DEPTH	<i>255</i> FT.	LOG SPEED	<i>20</i> FT./MIN.
BIT SIZE	<i>5"</i> IN.	LOG SCALE	<i>50</i> CPS/IN. T.C. <i>1</i>
FLUID LEVEL	<i>146'</i> FT.	DETECTOR TYPE	<i>SCINT</i>
CSG.		DECENTRALIZED	<input checked="" type="checkbox"/>
REMARKS		SOURCE TYPE	<i>Cs 137</i>
		TRK. NO.	<i>29</i>
		OPERATOR	<i>BRADLEY</i>
		DETECTOR SIZE	<i>1 1/2 x 1/2</i>
		CENTRALIZED	
		SOURCE SIZE	<i>125 Mg</i>

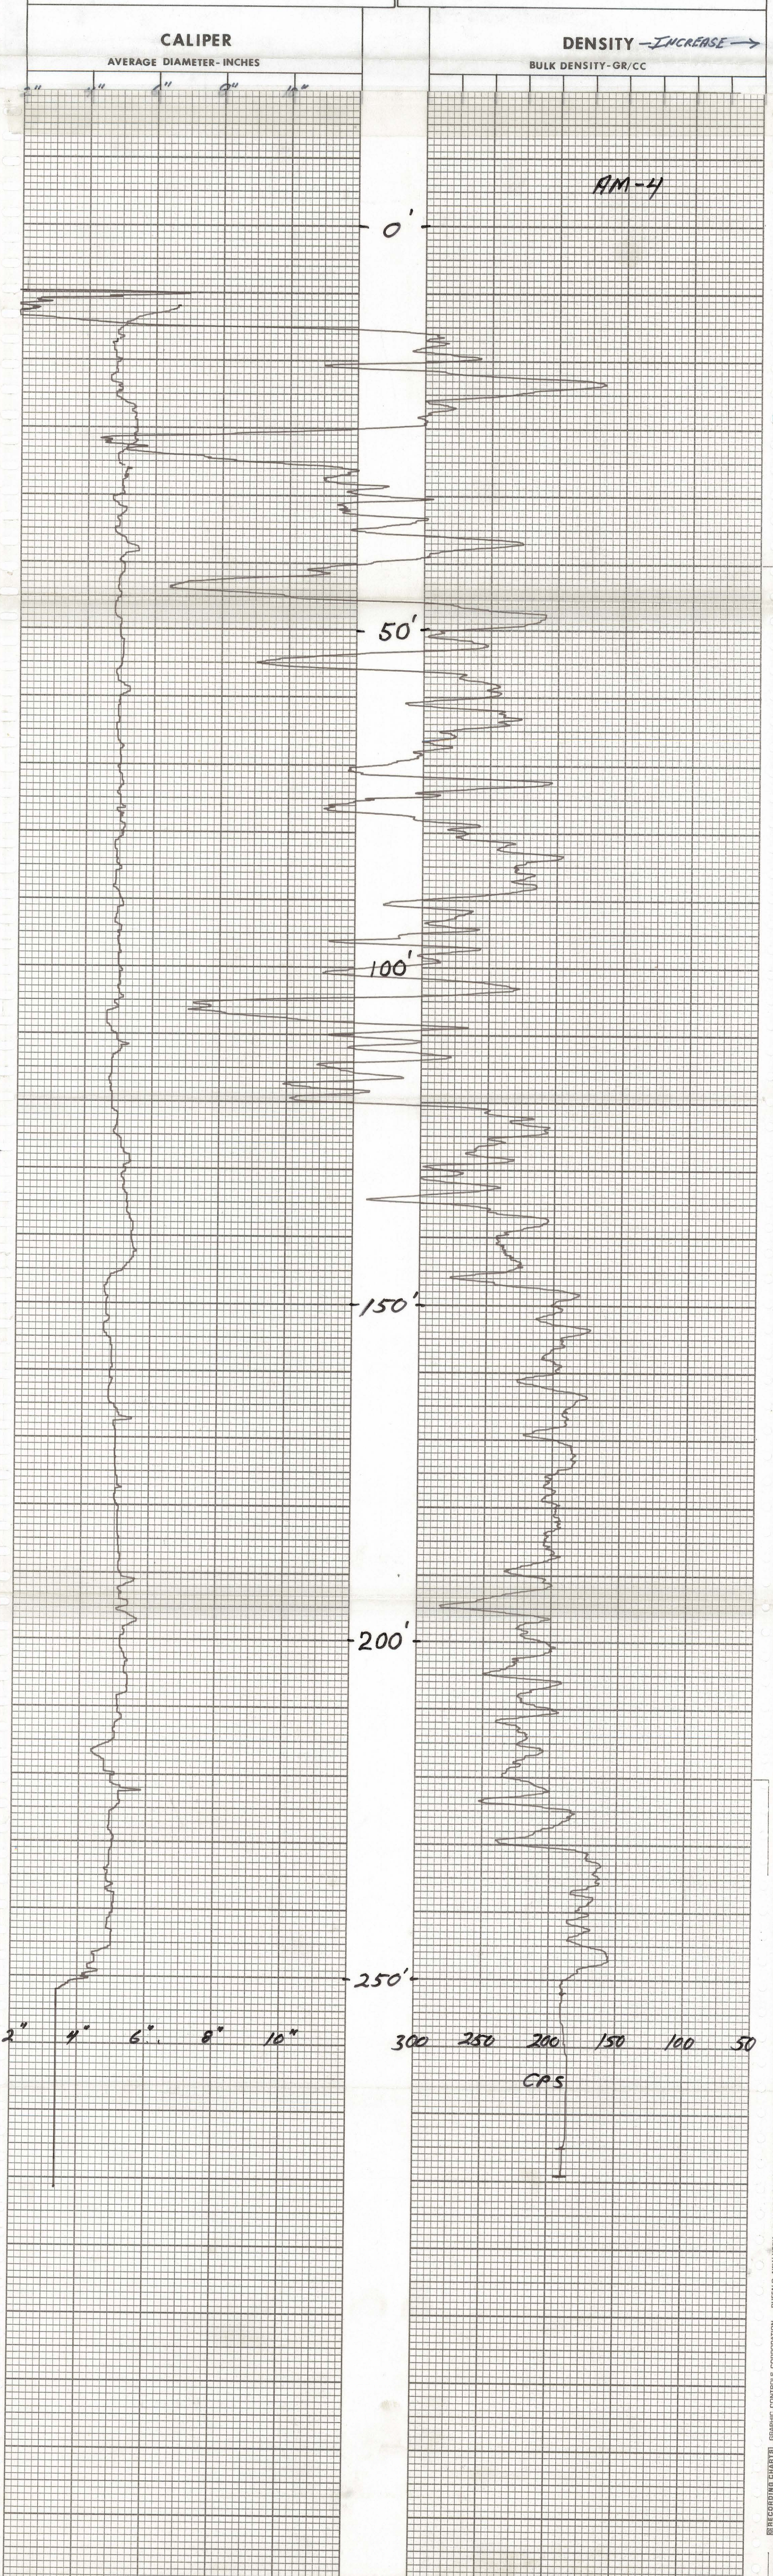


RECORDED (EARTH) GRAPHIC CONTROLS CORPORATION BUFFALO, NEW YORK
 PRINTED IN U.S.A.
 NO. GC 12101

MINERALS EXPLORATION CO.

CASPER, WYOMING

HOLE NO. *AM-4*

LOCATION <i>ANDERSON MINE</i>		<i>1206 266.12N</i> <i>88 336.38E</i>		GAMMA SCALE	<i>500</i>	
COUNTY <i>YAVAPAI</i>	STATE <i>ARIZONA</i>			PROBE TYPE	<i>SCINT</i>	
GP. <i>1,203,876.1 N</i> <i>641,982.6 E</i>	ELEV. <i>1812'</i>			K-FACTOR	<i>2.31 X 10⁻⁵</i>	
SEC. <i>10</i>	TWP. <i>11N</i>	RGE. <i>10W</i>			DEAD TIME	<i>9.6 USEC</i>
DATE	<i>1-26-75</i>				TIME CONSTANT	<i>1</i>
DEPTH DRILLED	<i>255</i>				PROBE DIA.	<i>1 1/16"</i>
DEPTH LOGGED	<i>255</i>				CALIPER	
FOOTAGE LOGGED	<i>325</i>				DIRECTIONAL SURVEY	<i>-</i>
HOLE DIAMETER	<i>5"</i>				TEMPERATURE	<i>-</i>
WATER FACTOR	<i>1.152</i>				OPERATOR	<i>D. BRADLEY</i>
RESISTIVITY	<i>50 10 OHMS/INCH</i>				DRILLER	
SELF POTENTIAL	<i>- M.V./IN.</i>				CONTRACTOR	<i>UNIVERSAL</i>
RERUNS	1ST. RUN	2ND. RUN	3RD. RUN	LAST A.E.C. PIT RUN <i>11-4-74</i>		
BOTTOM	<i>225'</i>	<i>145'</i>		FLUID LEVEL		
TOP	<i>195</i>	<i>105'</i>		REMARKS:		
TOTAL FEET	<i>30'</i>	<i>40'</i>				
SCALE RUN	<i>5K</i>	<i>5K</i>				

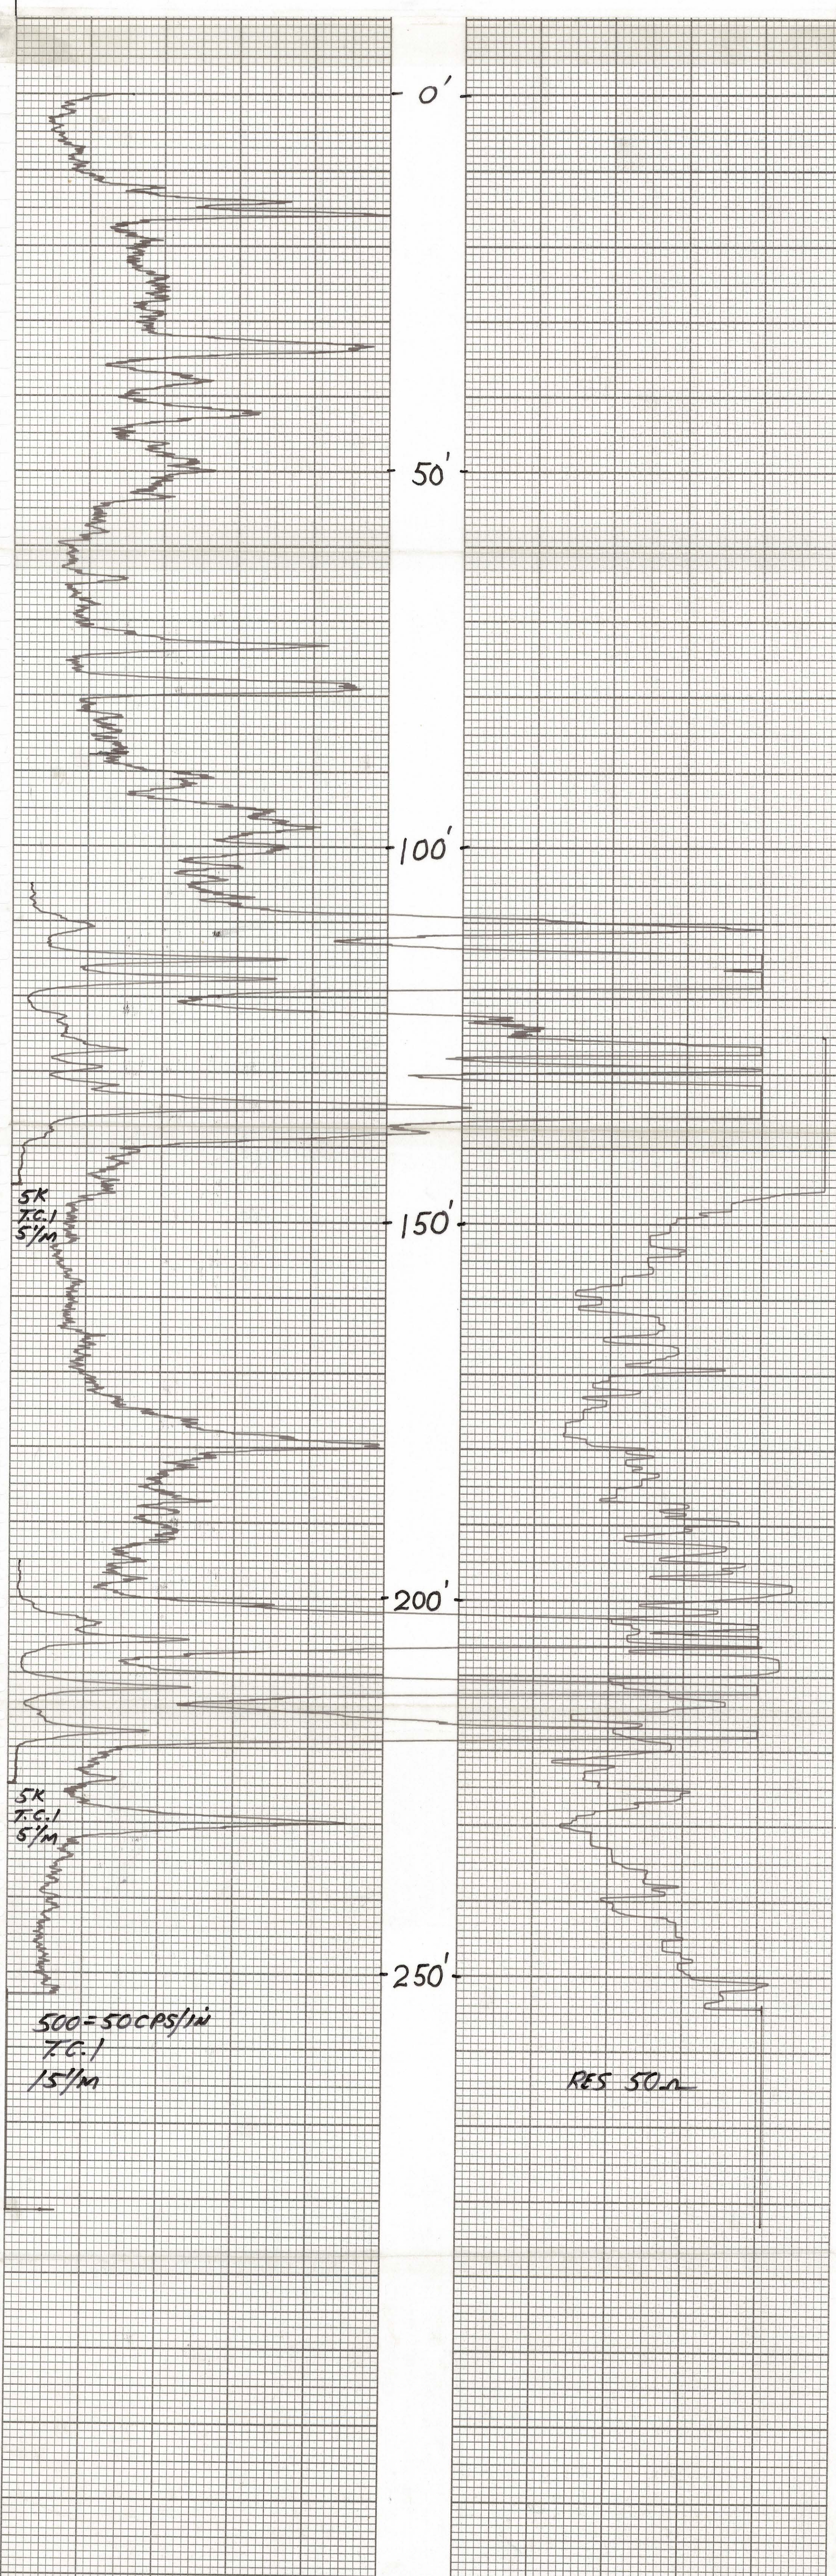


NO. GC 12101
 PRINTED IN U.S.A.
 GRAPHIC CONTROLS CORPORATION
 BUFFALO, NEW YORK

MINERALS EXPLORATION CO.

CASPER, WYOMING

HOLE NO. **AM-5**


LOCATION	ANDERSON MINE ^{1204 790.13N} ^{83 971.13E}			GAMMA SCALE	500	
COUNTY	YAVAPAI	STATE	ARIZONA	PROBE TYPE	SCINT	
GP.	^{1200, 380.4N} ^{687, 545.9E}	ELEV.	1918'	K-FACTOR	2.31×10^{-5}	
SEC.	29 9	TWP.	11N	DEAD TIME	9.6 USEC	
			RGE.	10W	TIME CONSTANT	1
DATE	1-27-75			PROBE DIA.	1 1/16"	
DEPTH DRILLED	525'			CALIPER	-	
DEPTH LOGGED	486'			DIRECTIONAL SURVEY	-	
FOOTAGE LOGGED	526'			TEMPERATURE	-	
HOLE DIAMETER	5"			OPERATOR	D. BRADLEY	
WATER FACTOR	1.152			DRILLER	DAVE	
RESISTIVITY	10			CONTRACTOR	BEEMAN	
SELF POTENTIAL	-			OHMS/INCH		
	M.V./IN.			LAST A.E.C. PIT RUN	11-4-74	
RERUNS	1ST. RUN	2ND. RUN	3RD. RUN	FLUID LEVEL	318'	
BOTTOM	460'			REMARKS:		
TOP	420'			DRILLED TO 525'. LOGGED TO 486'. BOTTOM FILLED W/ SLUFF. DEEPEMED TO 595' at a latter date.		
TOTAL FEET	40'					
SCALE RUN	1K					



RECORDED (DATE) GRAPHIC CONTROLS CORPORATION BUFFALO, NEW YORK
 PRINTED IN U.S.A.
 NO. GC 12101
 RECORDED (DATE) GRAPHIC CONTROLS CORPORATION BUFFALO, NEW YORK
 PRINTED IN U.S.A.
 NO. GC 12101
 RECORDED (DATE) GRAPHIC CONTROLS CORPORATION BUFFALO, NEW YORK
 PRINTED IN U.S.A.
 NO. GC 12101

AREA <i>ANDERSON MINE</i> 1206 257.69N 87 303.06E		ELEVATION <i>1790'</i>	HOLE NO. <i>AM-6</i>
GRID POINT <i>267,848.84 640,949.7E</i>			
COUNTY <i>YAVAPAI</i>	STATE <i>ARIZONA</i>	<u>GAMMA - GAMMA DENSITY</u>	
SEC. <i>10</i>	TWP. <i>11N</i> RGE. <i>10W</i>		

BOREHOLE DATA		LOG DATA	
DATE	<i>1-27-74</i>	TOTAL DEPTH LOGGED	<i>150</i> FT.
DRILLER	<i>STEVE</i>	TOTAL FOOTAGE LOGGED	<i>150</i> FT.
DRILLER DEPTH	<i>170'</i> FT.	LOG SPEED	<i>20</i> FT./MIN.
BIT SIZE	<i>5"</i> IN.	LOG SCALE	<i>50</i> CPS/IN. T.C. <i>1</i>
FLUID LEVEL	<i>113'</i> FT.	DETECTOR TYPE	<i>SCINT</i> DETECTOR SIZE <i>1 1/2 x 1/2</i>
CSG.		DECENTRALIZED	CENTRALIZED <input checked="" type="checkbox"/>
REMARKS		SOURCE TYPE	<i>Cs-137</i> SOURCE SIZE <i>125 Mc</i>
		TRK. NO.	<i>29</i>
		OPERATOR	<i>BRADLEY</i>

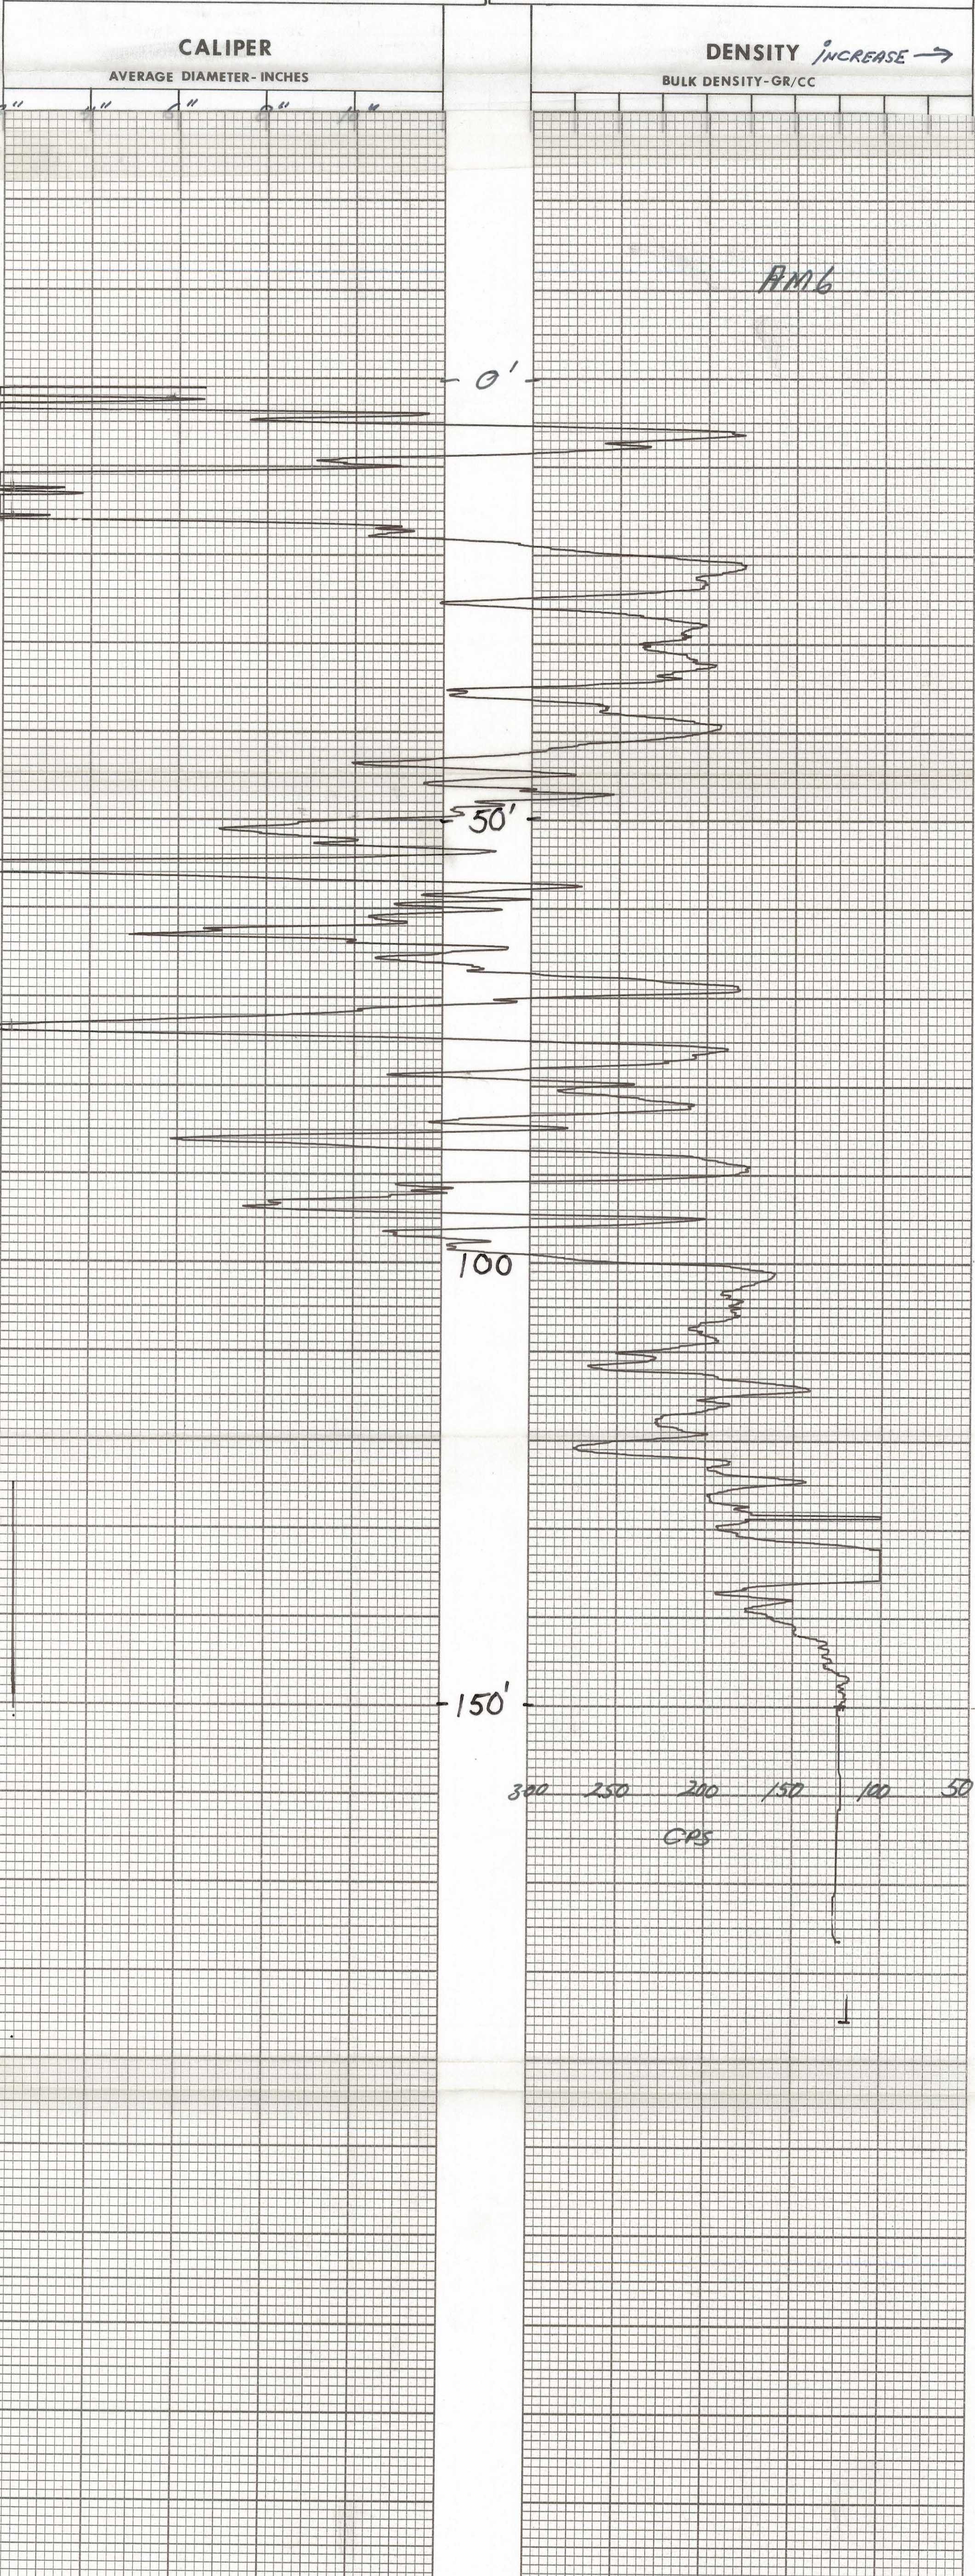


MINERALS EXPLORATION CO.

CASPER, WYOMING

HOLE NO. *AM-6*

LOCATION <i>ANDERSON MINE</i>		<i>1206 257.69N</i> <i>87 303.06E</i>		GAMMA SCALE	<i>500</i>
COUNTY <i>YAVAPAI</i>	STATE <i>ARIZONA</i>			PROBE TYPE	<i>SCINT</i>
GP. <i>1,203,848.8-N</i> <i>640,949.7-E</i>	ELEV. <i>1790'</i>			K-FACTOR	<i>2.31 x 10⁻⁵</i>
SEC. <i>10</i>	TWP. <i>11N</i>	RGE. <i>10W</i>		DEAD TIME	<i>9.6 USEC</i>
DATE	<i>1-27-74</i>			TIME CONSTANT	<i>1</i>
DEPTH DRILLED	<i>170'</i>			PROBE DIA.	<i>1 1/16"</i>
DEPTH LOGGED	<i>159'</i>			CALIPER	<i>-</i>
FOOTAGE LOGGED	<i>159'</i>			DIRECTIONAL SURVEY	<i>-</i>
HOLE DIAMETER	<i>5"</i>			TEMPERATURE	<i>-</i>
WATER FACTOR	<i>1.152</i>			OPERATOR	<i>D. BRADLEY</i>
RESISTIVITY	<i>10</i>	OHMS/INCH		DRILLER	<i>-</i>
SELF POTENTIAL	<i>-</i>	M.V./IN.		CONTRACTOR	<i>UNIVERSAL</i>
RERUNS	1ST. RUN	2ND. RUN	3RD. RUN	LAST A.E.C. PIT RUN	<i>11-4-74</i>
BOTTOM				FLUID LEVEL	<i>113'</i>
TOP				REMARKS:	
TOTAL FEET					
SCALE RUN					

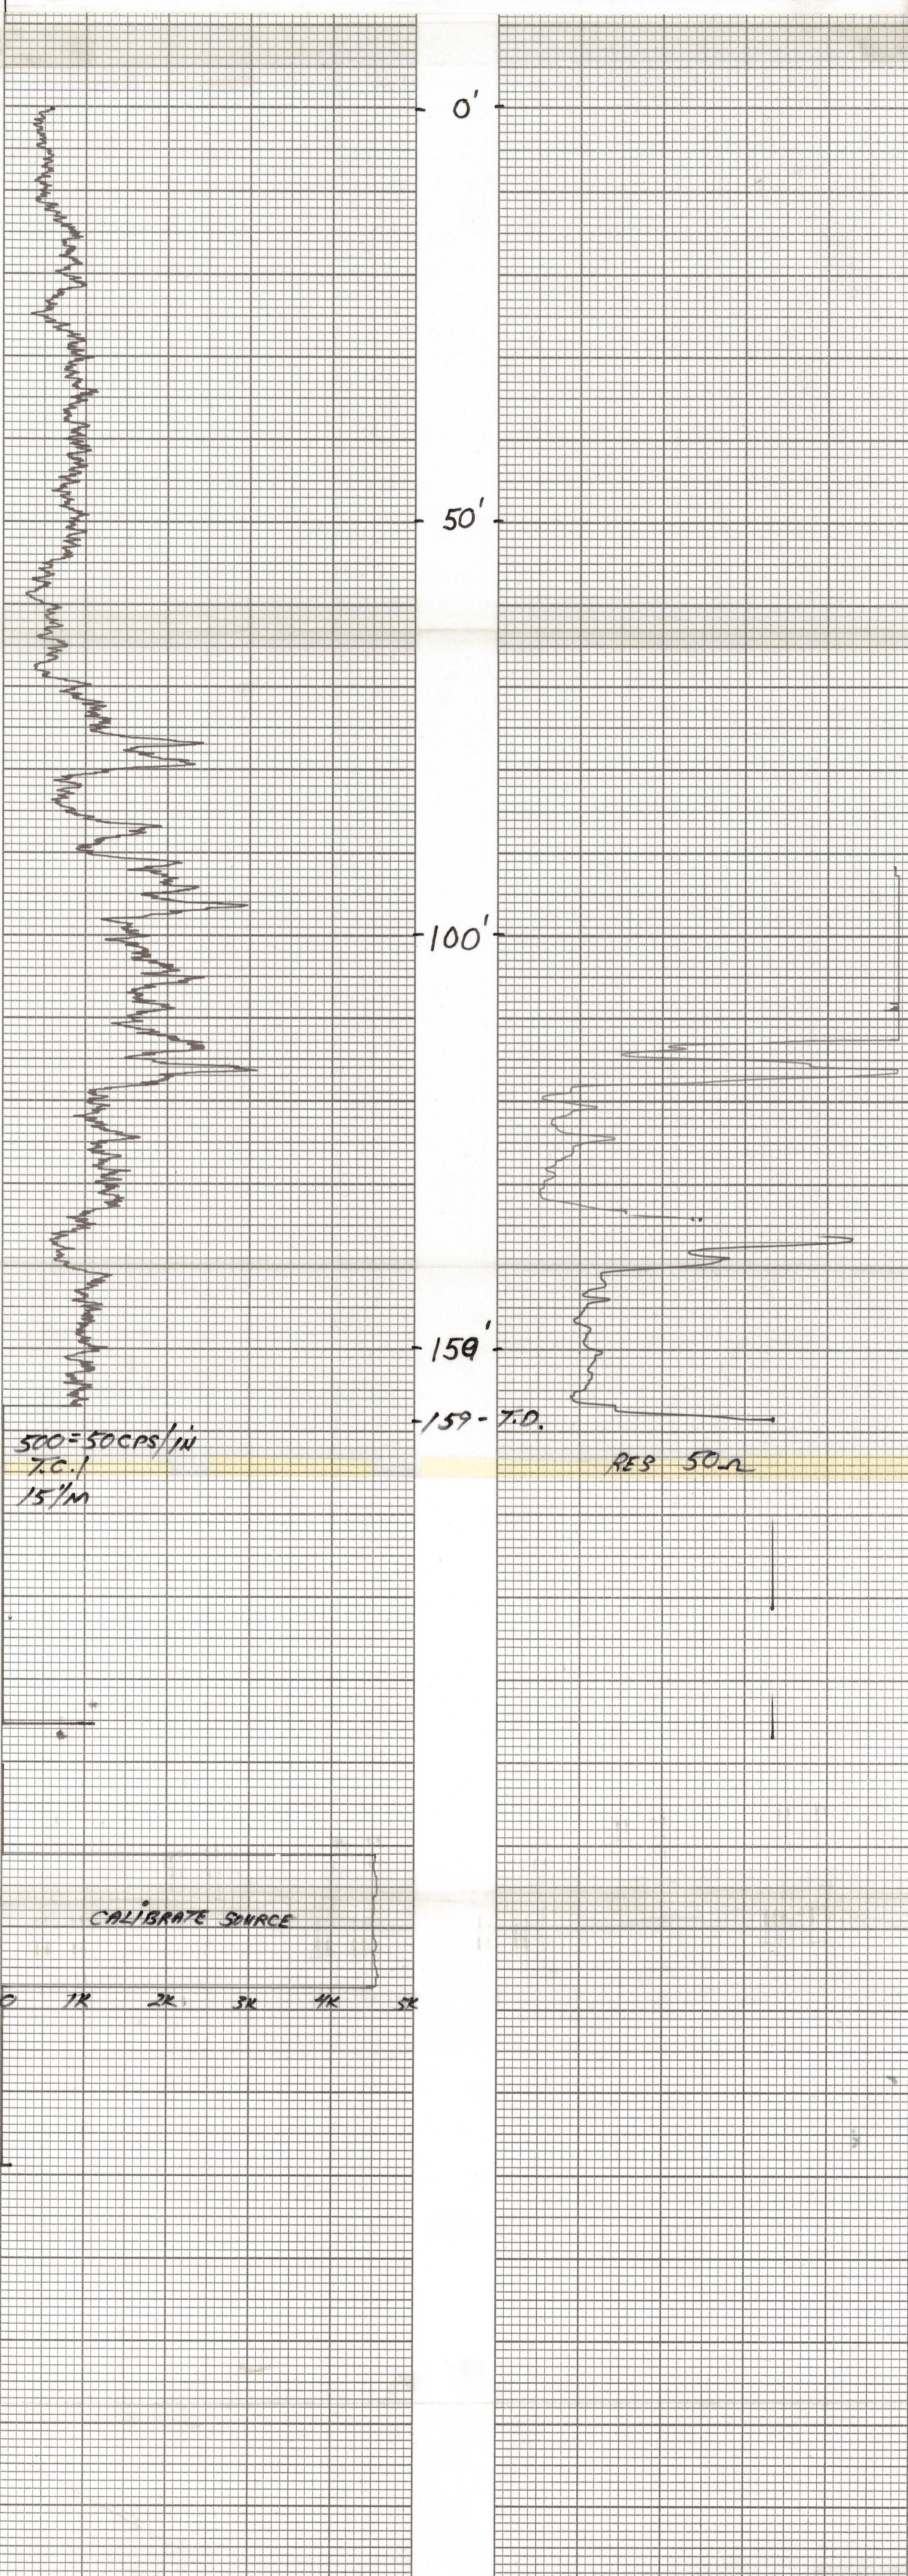


RECORDING CHARTS GRAPHIC CONTROLS CORPORATION BUFFALO, NEW YORK
 PRINTED IN U.S.A.
 NO. GC 12101

MINERALS EXPLORATION CO.

CASPER, WYOMING

HOLE NO. *AM-7C*

LOCATION <i>ANDERSON MINE</i> ^{1206 159.54N} _{90203.76E}		GAMMA SCALE	<i>500 CPS/IN.</i>	
COUNTY <i>Yavapai</i>	STATE <i>ARIZONA</i>	PROBE TYPE	<i>ScINT.</i>	
GP. ^{1,203,803N} _{643,852E}	ELEV. <i>1931'</i>	K-FACTOR	<i>2.25¹⁰⁻⁵</i>	
SEC.	TWP. <i>11N</i>	RGE. <i>10W</i>	DEAD TIME	<i>9.6 μsec.</i>
DATE	<i>Dec. 19, 1975</i>		TIME CONSTANT	<i>1</i>
DEPTH DRILLED	<i>118'</i>		PROBE DIA.	<i>1 1/16"</i>
DEPTH LOGGED	<i>118'</i>		CALIPER	
FOOTAGE LOGGED	<i>156'</i>		DIRECTIONAL SURVEY	
HOLE DIAMETER	<i>5 1/8" To 95' 3 7/8" 118'</i>		TEMPERATURE	
WATER FACTOR	<i>1.157</i>		OPERATOR	<i>Hudson</i>
RESISTIVITY	<i>10 OHMS/INCH</i>		DRILLER	<i>StarNER</i>
SELF POTENTIAL	<i>M.V./IN.</i>		CONTRACTOR	<i>REID</i>
RERUNS	1ST. RUN	2ND. RUN	3RD. RUN	LAST A.E.C. PIT RUN <i>Aug. 2, 1975</i>
BOTTOM	<i>118'</i>	<i>27'</i>		FLUID LEVEL <i>115'</i>
TOP	<i>92'</i>	<i>15'</i>		REMARKS:
TOTAL FEET	<i>26'</i>	<i>12'</i>		
SCALE RUN	<i>5K=500CPS/IN. 10K=1.KCPS/IN.</i>			

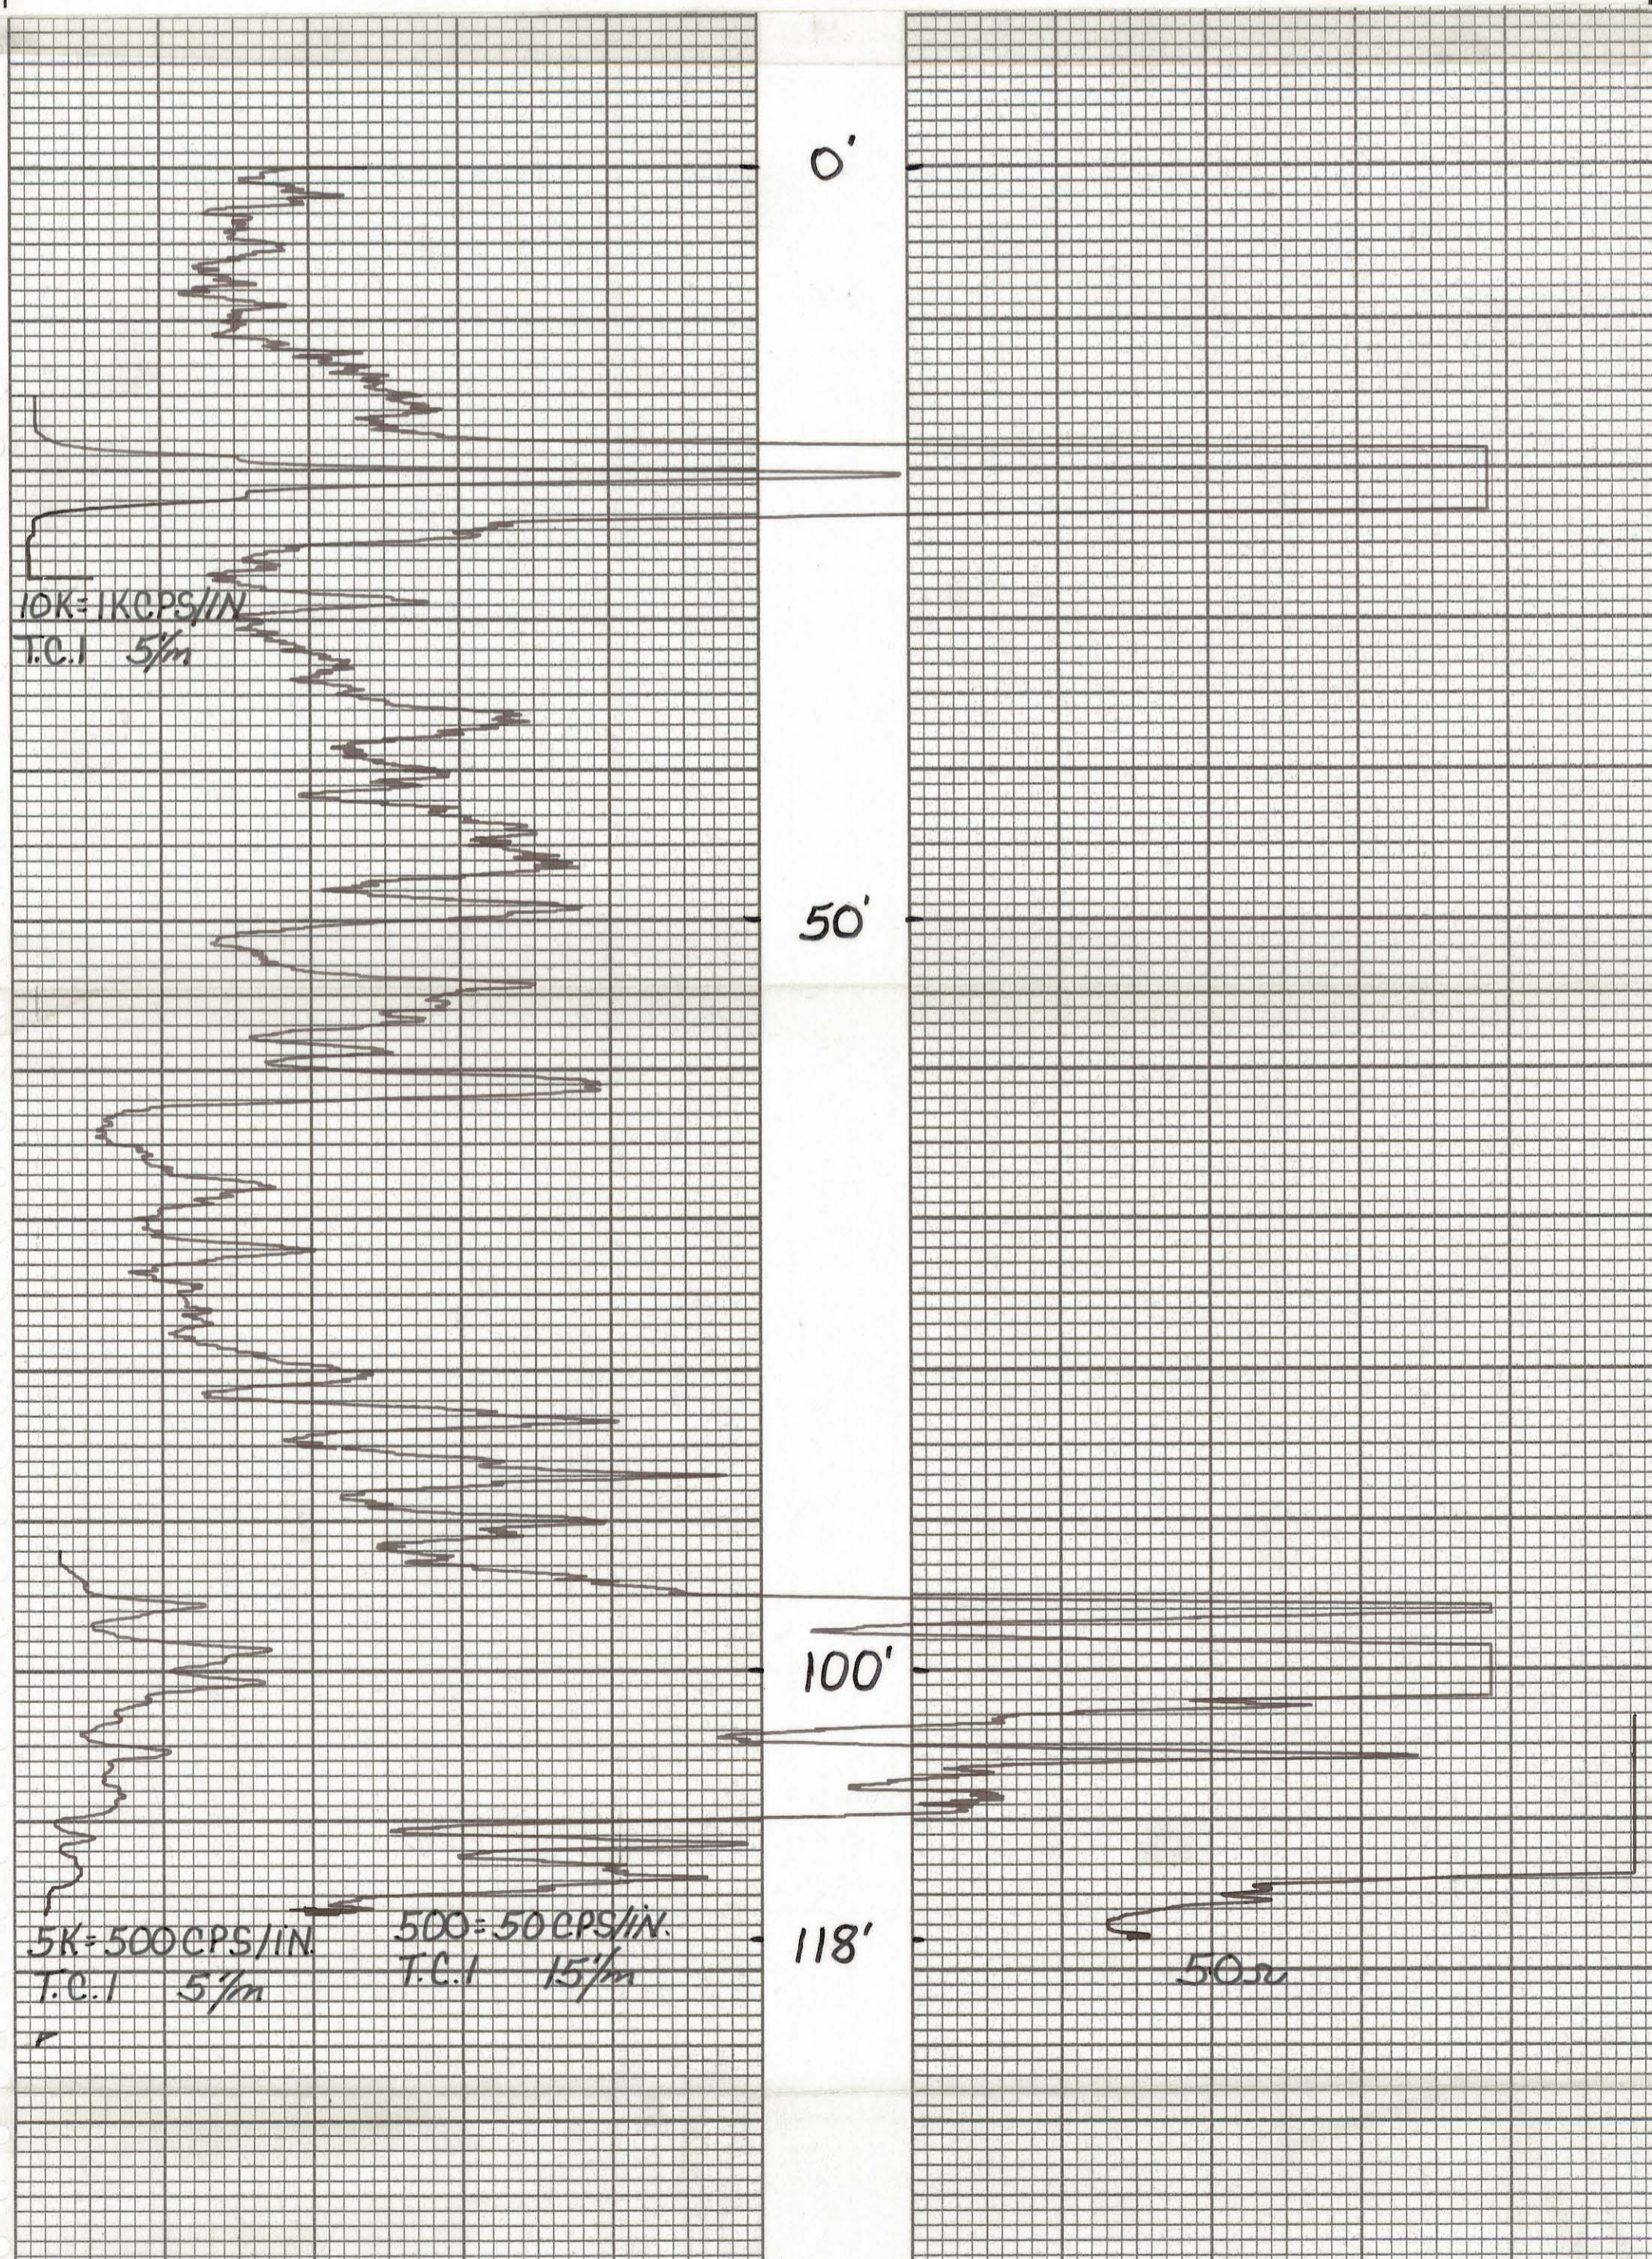


MINERALS EXPLORATION CO.

CASPER, WYOMING

AREA <i>ANDERSON MINE</i> 1206 155.93N 90 181.70E		ELEVATION <i>1926'</i>	HOLE NO. <i>AM-7</i>
GRID POINT <i>1,203,799.1N 643,830.4E</i>			
COUNTY <i>YAVAPAI</i>	STATE <i>ARIZONA</i>	GAMMA - GAMMA DENSITY	
SEC. <i>10</i>	TWP. <i>11</i> RGE. <i>10</i>		

BOREHOLE DATA		LOG DATA	
DATE		TOTAL DEPTH LOGGED	<i>180</i> FT.
DRILLER		TOTAL FOOTAGE LOGGED	<i>180</i> FT.
DRILLER DEPTH	FT.	LOG SPEED	<i>20</i> FT./MIN.
BIT SIZE	IN.	LOG SCALE	<i>100</i> CPS/IN. T.C. <i>1</i>
FLUID LEVEL	FT.	DETECTOR TYPE	<i>SCINT</i> DETECTOR SIZE <i>1 1/2 x 1/2</i>
CSG.		DECENTRALIZED	<input checked="" type="checkbox"/> CENTRALIZED
REMARKS		SOURCE TYPE	<i>Cs-137</i> SOURCE SIZE <i>125 Mc</i>
		TRK. NO.	<i>29</i>
		OPERATOR	<i>BRADLEY</i>

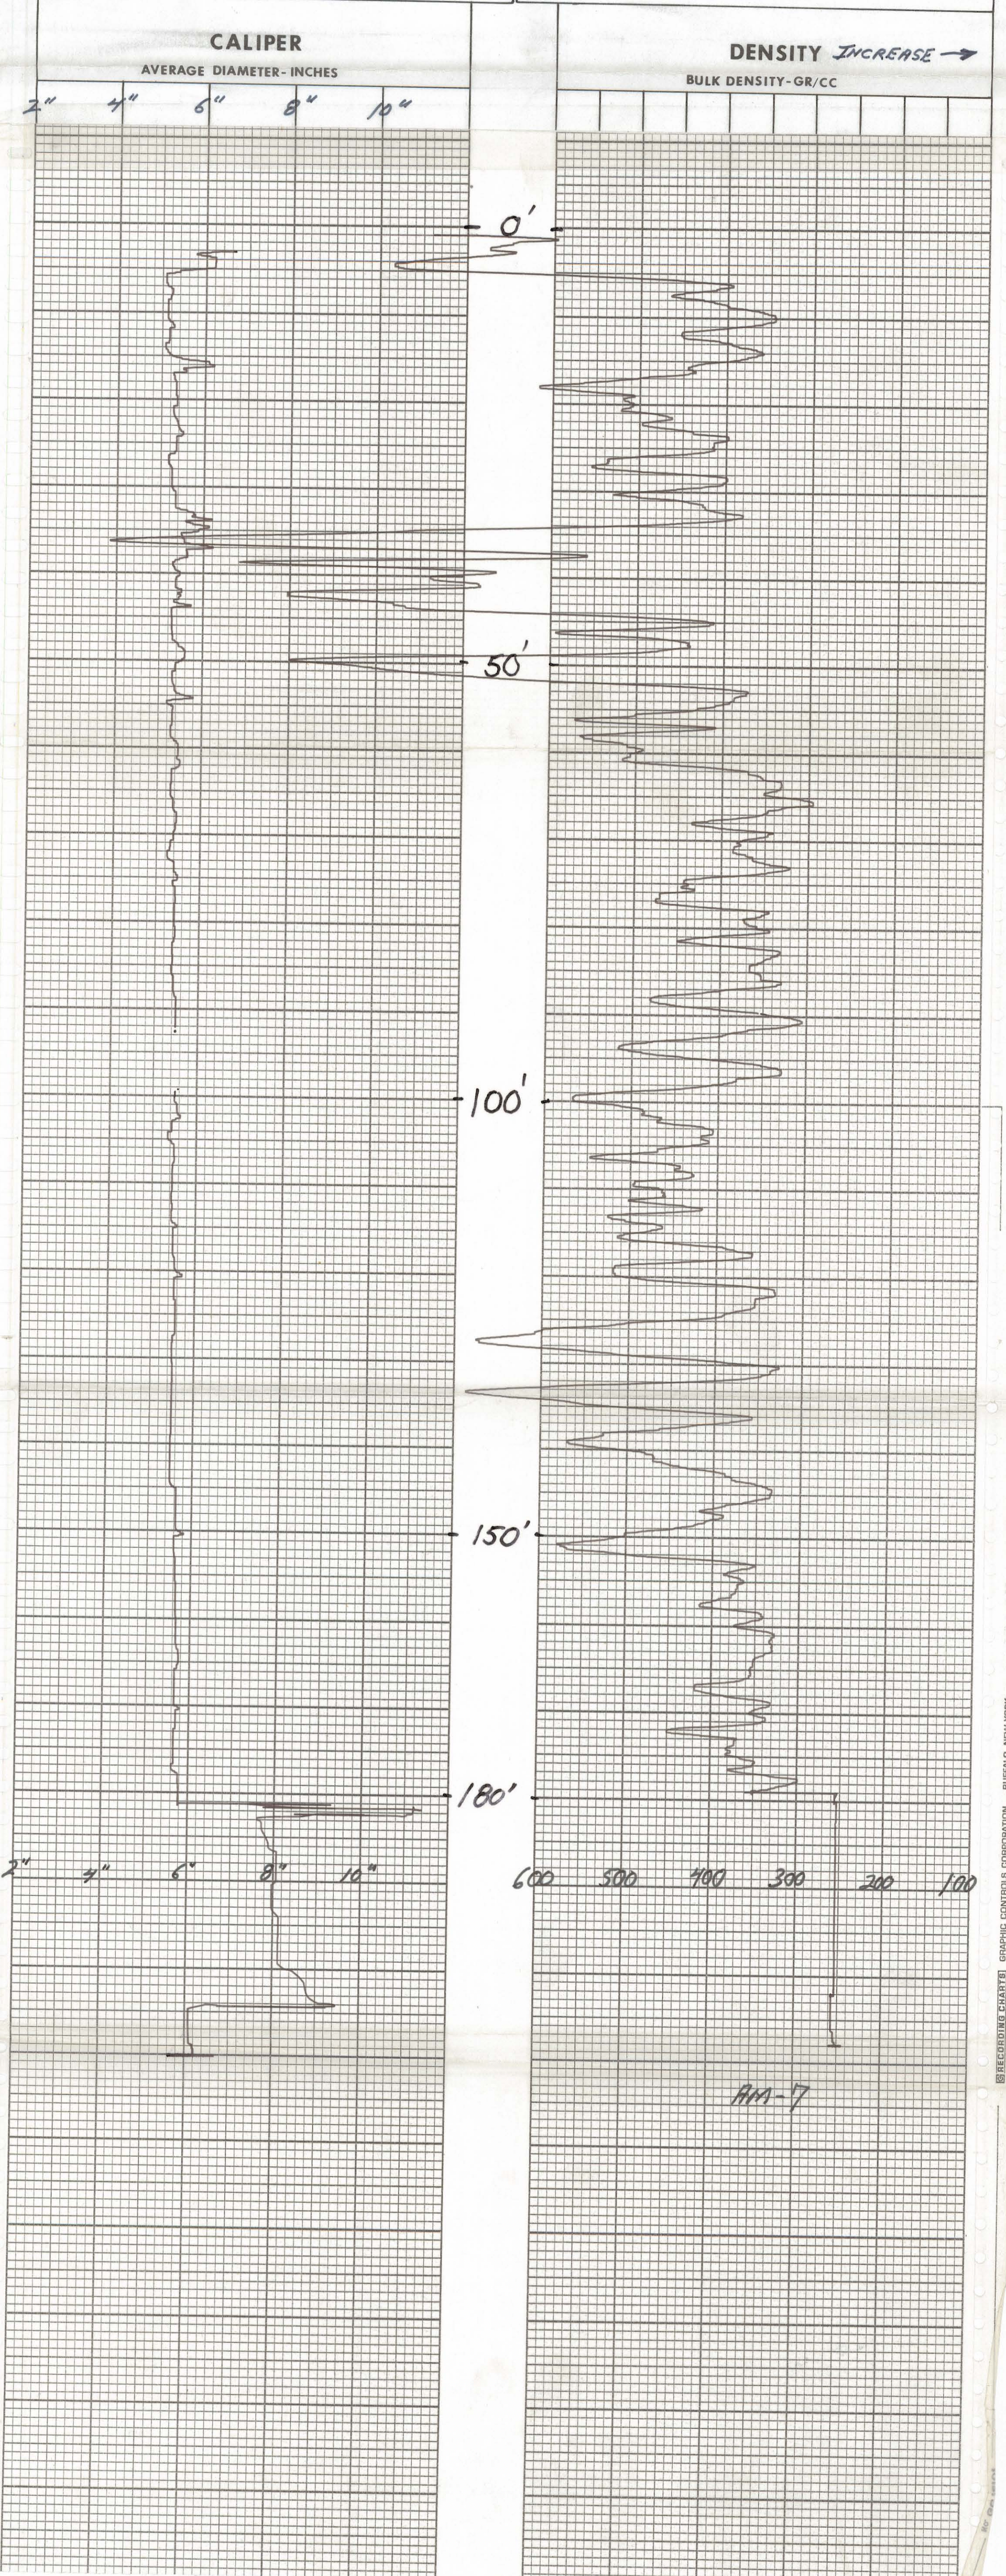


MINERALS EXPLORATION CO.

CASPER, WYOMING

HOLE NO. *AM-7*

LOCATION <i>ANDERSON MINE</i>		<i>1206 155.93N</i>		GAMMA SCALE	<i>500</i>
		<i>90 181.70E</i>		PROBE TYPE	<i>SCINT</i>
COUNTY <i>YAVAPAI</i>	STATE <i>ARIZONA</i>			K-FACTOR	<i>2.31 x 10⁻⁵</i>
GP. <i>1203, 799.1 N</i>	ELEV. <i>1926'</i>			DEAD TIME	<i>9.6 μSEC</i>
				TIME CONSTANT	<i>1</i>
SEC. <i>10</i>	TWP. <i>11N</i>	RGE. <i>10W</i>			PROBE DIA. <i>1 1/16"</i>
DATE <i>1-30-75</i>					CALIPER <i>-</i>
DEPTH DRILLED <i>185'</i>					DIRECTIONAL SURVEY <i>-</i>
DEPTH LOGGED <i>184'</i>					TEMPERATURE <i>-</i>
FOOTAGE LOGGED <i>234'</i>					OPERATOR <i>D. BRADLEY</i>
HOLE DIAMETER <i>5 1/2"</i>					DRILLER <i>FRED</i>
WATER FACTOR <i>1.172</i>					CONTRACTOR <i>UNIVERSAL</i>
RESISTIVITY <i>-</i>	OHMS/INCH				LAST A.E.C. PIT RUN <i>11-4-74</i>
SELF POTENTIAL <i>-</i>	M.V./IN.				FLUID LEVEL <i>DRY</i>
RERUNS	1ST. RUN	2ND. RUN	3RD. RUN	REMARKS:	
BOTTOM	<i>120'</i>	<i>30'</i>		<i>Gamma Spikes at 150' are due to ^{temporary} equipment malfunction not down hole conditions.</i>	
TOP	<i>90'</i>	<i>10'</i>			
TOTAL FEET	<i>30'</i>	<i>20'</i>			
SCALE RUN	<i>5K</i>	<i>5K</i>			

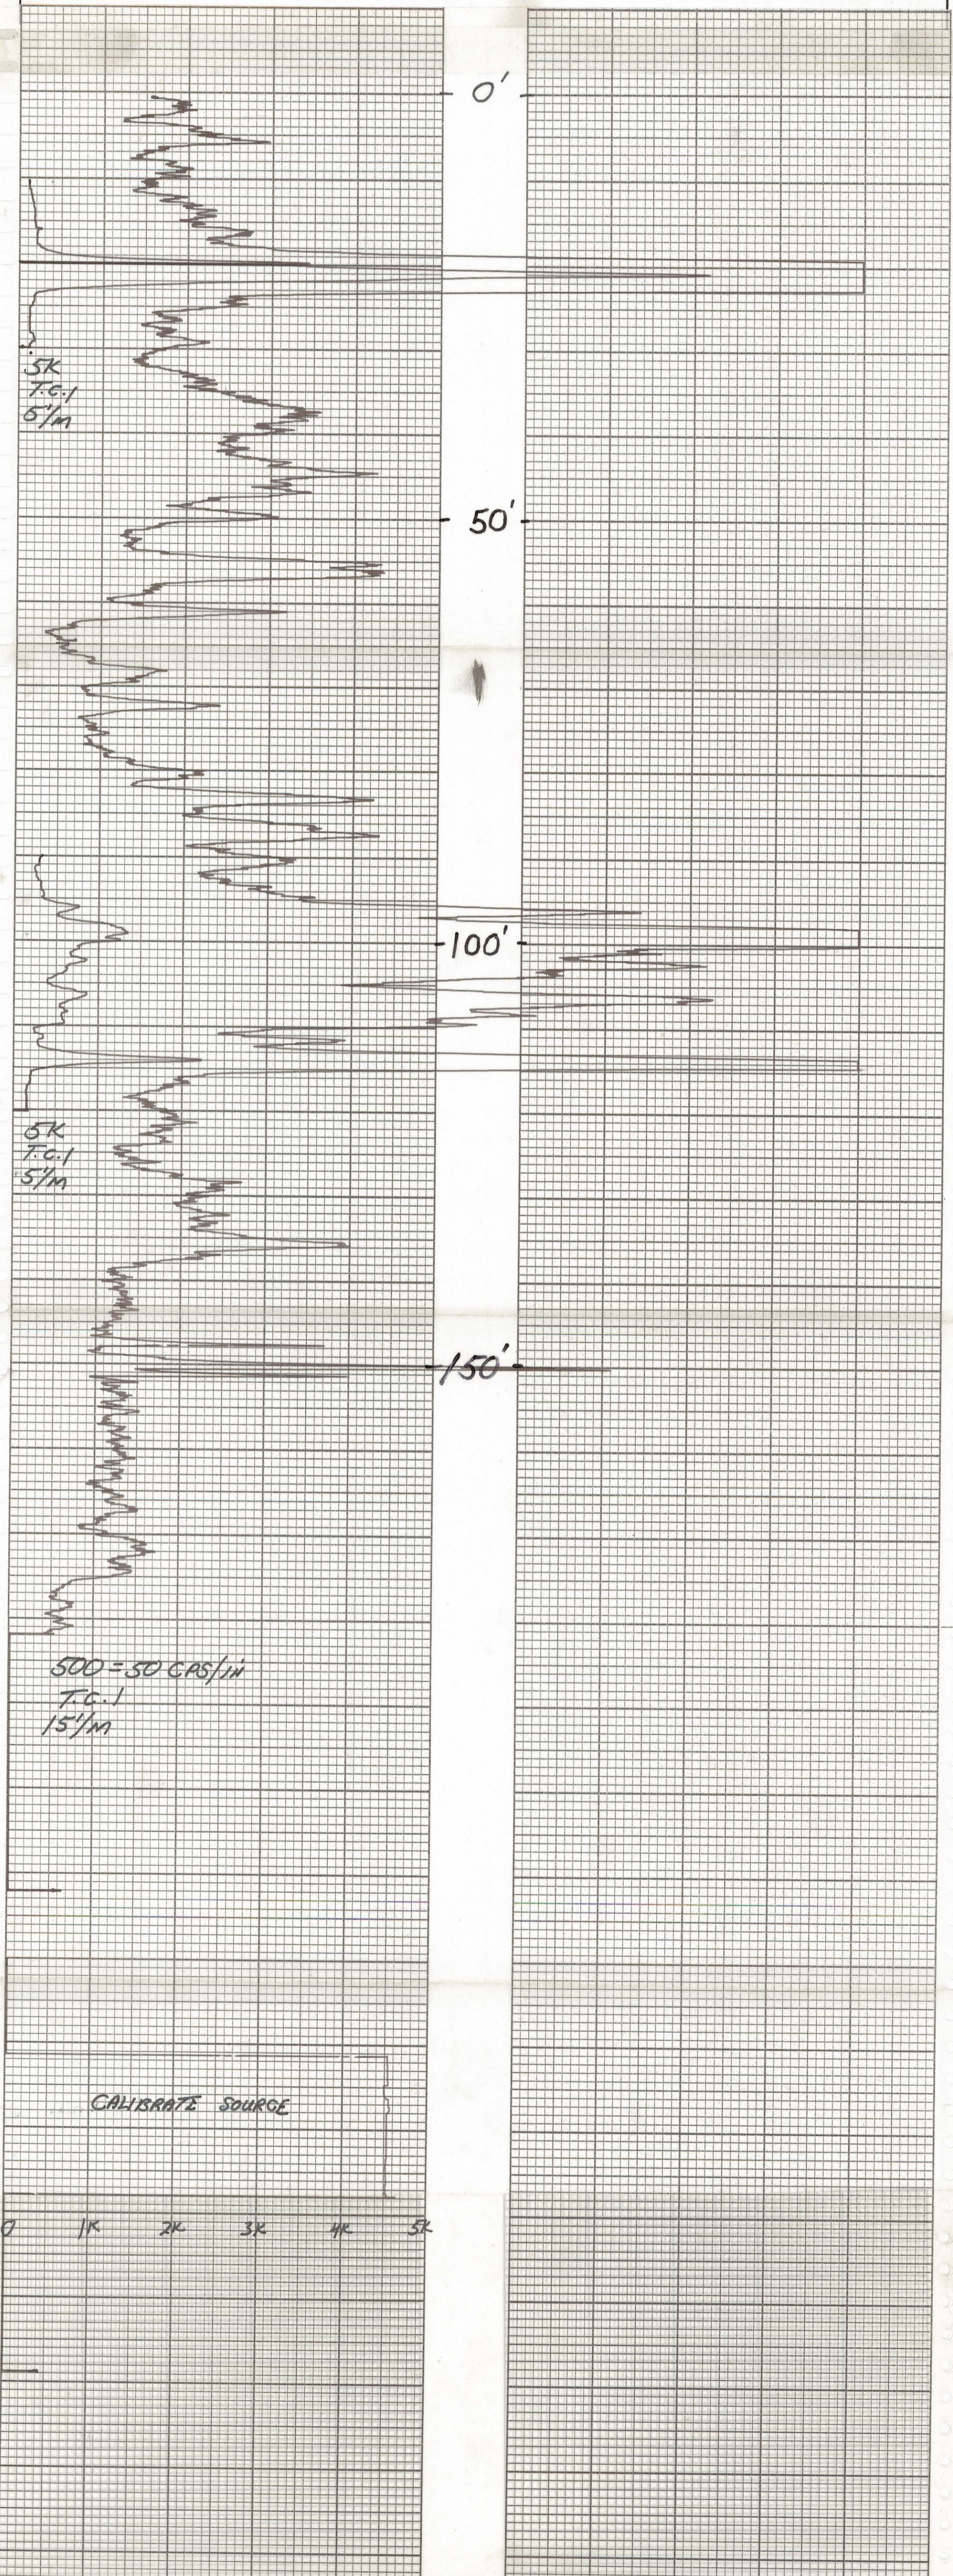


RECORDED CHARTS GRAPHIC CONTROLS CORPORATION BUFFALO, NEW YORK
 PRINTED IN U.S.A.
 NO. GC 12101

MINERALS EXPLORATION CO.

CASPER, WYOMING

AREA <i>ANDERSON MINE</i>		<i>1206 536.17N</i> <i>86 443.93E</i>		HOLE NO. <i>AM-8</i>
GRID POINT <i>1,204,112.2N</i> <i>646,086.1E</i>	ELEVATION <i>1830'</i>			
COUNTY <i>YAVAPAI</i>	STATE <i>ARIZONA</i>	<u>GAMMA-GAMMA DENSITY</u>		
SEC. <i>10</i>	TWP. <i>11N</i>			

BOREHOLE DATA		LOG DATA	
DATE	<i>1-28-75</i>	TOTAL DEPTH LOGGED	<i>254</i> FT.
DRILLER	<i>FRED</i>	TOTAL FOOTAGE LOGGED	<i>254</i> FT.
DRILLER DEPTH	<i>260</i> FT.	LOG SPEED	<i>20</i> FT./MIN.
BIT SIZE	<i>5 1/2"</i> IN.	LOG SCALE	<i>50</i> CPS/IN. T.C. <i>1</i>
FLUID LEVEL	<i>DRY</i> FT.	DETECTOR TYPE	<i>SGINT</i> DETECTOR SIZE <i>1 1/2 x 1/2</i>
CSG.		DECENTRALIZED	<input checked="" type="checkbox"/> CENTRALIZED
REMARKS		SOURCE TYPE	<i>Cs137</i> SOURCE SIZE <i>125Mc</i>
		TRK. NO.	<i>29</i>
		OPERATOR	<i>BRADLEY</i>

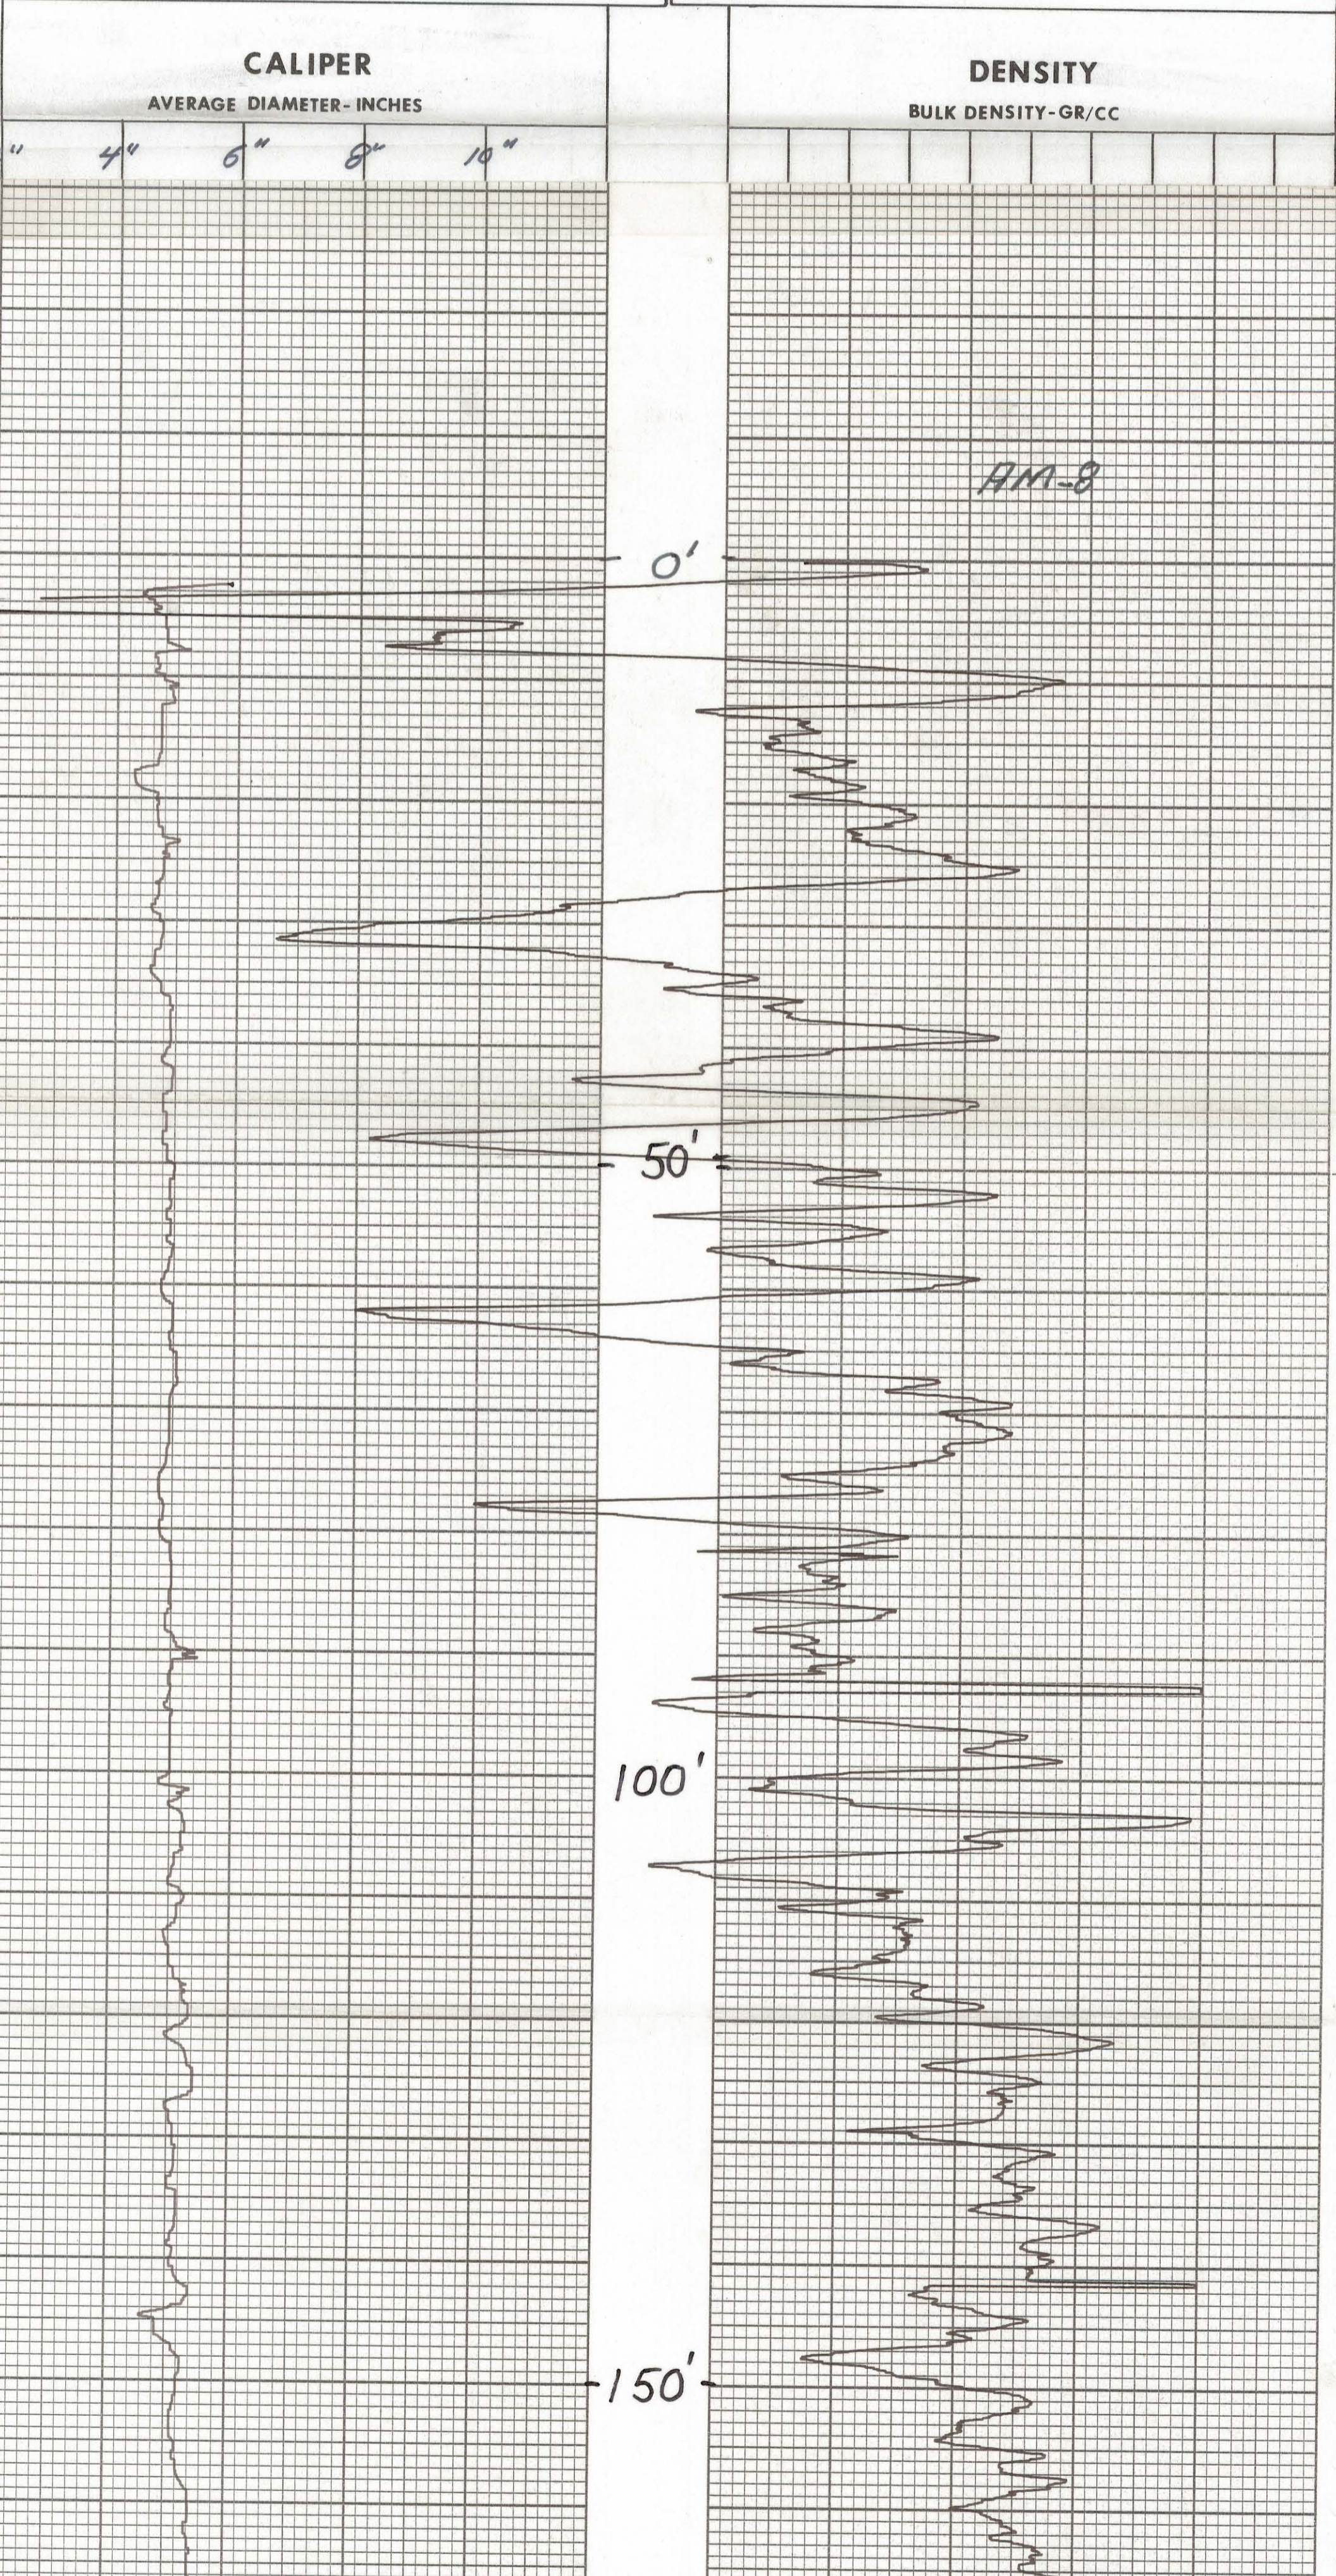


MINERALS EXPLORATION CO.

CASPER, WYOMING

HOLE NO. *AM-8*

LOCATION <i>ANDERSON MINE</i>		<i>1266536.17N</i> <i>86443.93E</i>		GAMMA SCALE	<i>500</i>
COUNTY <i>YAVAPAI</i>	STATE <i>ARIZONA</i>			PROBE TYPE	<i>SCINT</i>
GP. <i>1,204,112.20 N</i> <i>648,086.1 E</i>	ELEV. <i>1830'</i>			K-FACTOR	<i>2.31 x 10⁻⁵</i>
SEC. <i>10</i>	TWP. <i>11N</i>	RGE. <i>10W</i>		DEAD TIME	<i>9.6 USEC</i>
DATE	<i>1-28-75</i>			TIME CONSTANT	<i>1</i>
DEPTH DRILLED	<i>260'</i>			PROBE DIA.	<i>1 1/16"</i>
DEPTH LOGGED	<i>260'</i>			CALIPER	-
FOOTAGE LOGGED	<i>260'</i>			DIRECTIONAL SURVEY	-
HOLE DIAMETER	<i>5 1/2"</i>			TEMPERATURE	-
WATER FACTOR				OPERATOR	<i>D. BRADLEY</i>
RESISTIVITY	-		OHMS/INCH	DRILLER	<i>FRED</i>
SELF POTENTIAL	-		M.V./IN.	CONTRACTOR	<i>UNIVERSAL</i>
RERUNS	1ST. RUN	2ND. RUN	3RD. RUN	LAST A.E.C. PIT RUN	<i>11-4-74</i>
BOTTOM				FLUID LEVEL	<i>DRY</i>
TOP				REMARKS:	
TOTAL FEET					
SCALE RUN					

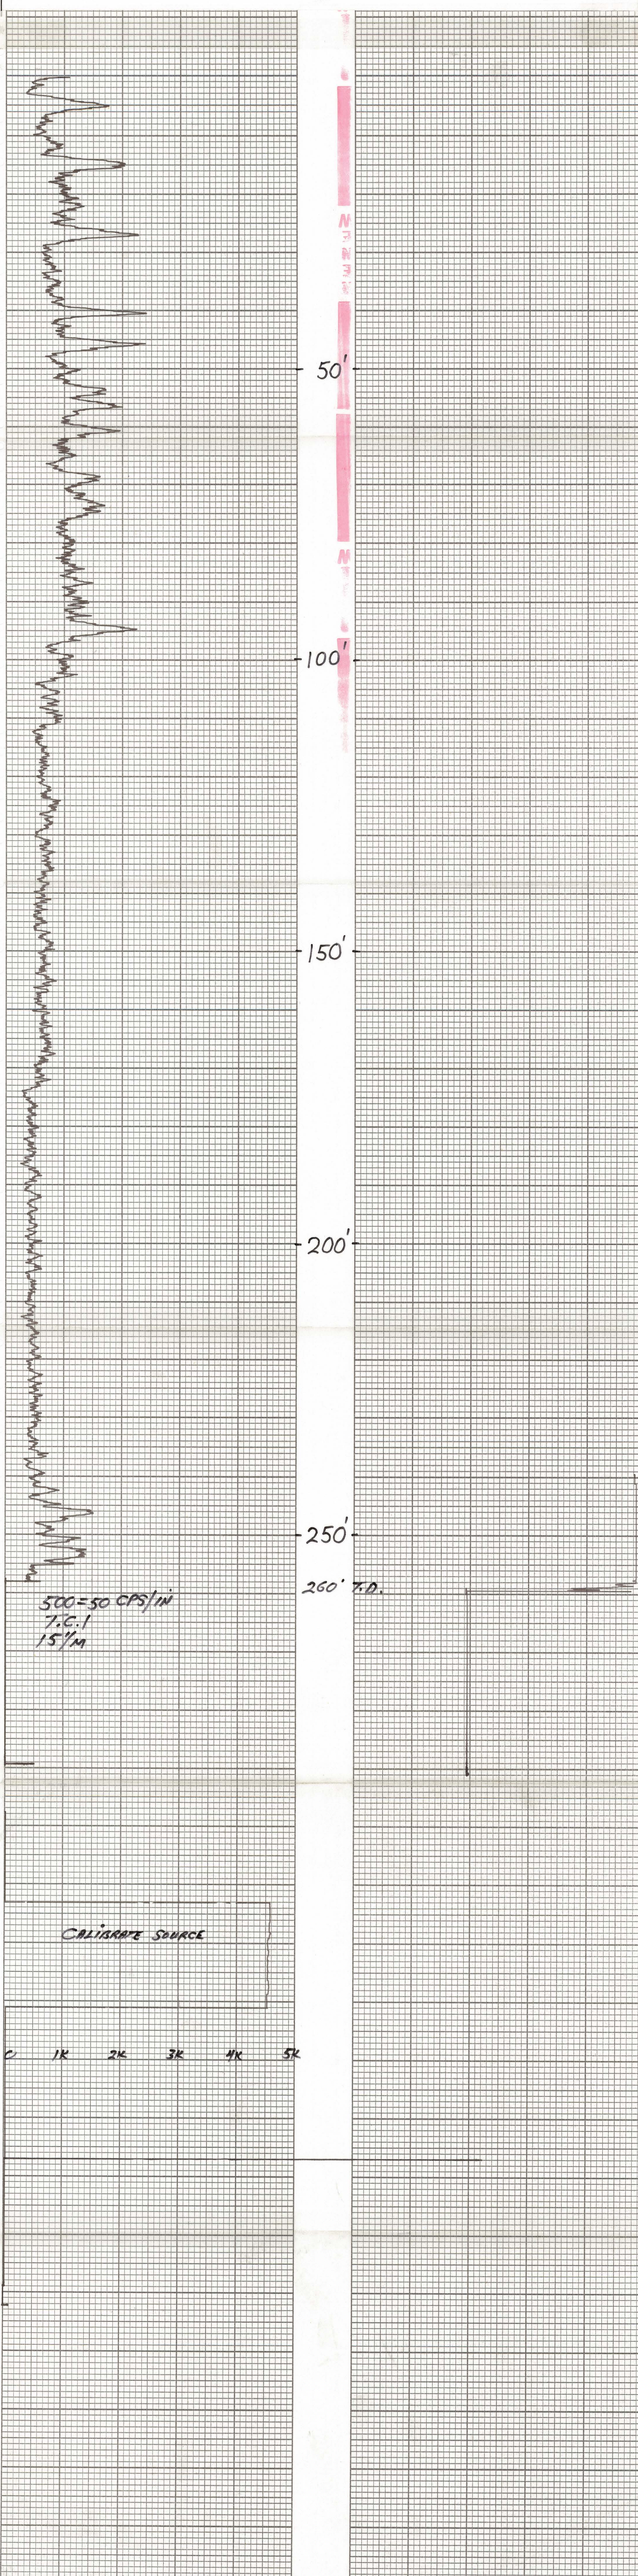

RECORDED (CHART) GRAPHIC CONTROLS CORPORATION BUFFALO, NEW YORK NO. GC 12101 PRINTED IN U.S.A.