



CONTACT INFORMATION
Mining Records Curator
Arizona Geological Survey
3550 N. Central Ave, 2nd floor
Phoenix, AZ, 85012
602-771-1601
<http://www.azgs.az.gov>
inquiries@azgs.az.gov

The following file is part of the John E. Kinnison mining collection

ACCESS STATEMENT

These digitized collections are accessible for purposes of education and research. We have indicated what we know about copyright and rights of privacy, publicity, or trademark. Due to the nature of archival collections, we are not always able to identify this information. We are eager to hear from any rights owners, so that we may obtain accurate information. Upon request, we will remove material from public view while we address a rights issue.

CONSTRAINTS STATEMENT

The Arizona Geological Survey does not claim to control all rights for all materials in its collection. These rights include, but are not limited to: copyright, privacy rights, and cultural protection rights. The User hereby assumes all responsibility for obtaining any rights to use the material in excess of "fair use."

The Survey makes no intellectual property claims to the products created by individual authors in the manuscript collections, except when the author deeded those rights to the Survey or when those authors were employed by the State of Arizona and created intellectual products as a function of their official duties. The Survey does maintain property rights to the physical and digital representations of the works.

QUALITY STATEMENT

The Arizona Geological Survey is not responsible for the accuracy of the records, information, or opinions that may be contained in the files. The Survey collects, catalogs, and archives data on mineral properties regardless of its views of the veracity or accuracy of those data.

GEOLOGIC REPORT SUPPORTING LEASE
APPLICATION IN VEKOL & QUIJOTOA AREAS
PAPAGO INDIAN RESERVATION, ARIZONA

by

STEBBINS MINERAL SURVEYS, INC.

J.E. Kinnison

STEBBINS MINERAL SURVEYS INCORPORATED

GEOLOGIC REPORT SUPPORTING LEASE
APPLICATION IN VEKOL & QUIJOTOA AREAS
PAPAGO INDIAN RESERVATION
ARIZONA

BY
STEBBINS MINERAL SURVEYS INCORPORATED
OLD GREENWICH, CONNECTICUT
JULY, 1964

STEBBINS MINERAL SURVEYS INCORPORATED

Index.

	<u>Page</u>
Summary of Papago Exploration Program	1
Vekol Mountains, Location Access, Topography, Climate.	2
Geology, Mineralization, Work by S.M.S. Vekol Lease Area.	3 5
Quijotoa Area, Location, Access, Topography, Climate, Geology.	7
Mineralization, Geochemistry, Geophysics. Quijotoa Lease Area.	8 9

	<u>Maps</u>
Location Map of Papago Reservation	1
Location of Lease Areas	2
Location of Vekol Lease	3
Location of Quijotoa Lease.	4
Geologic Map of Vekol Area.	5
Air Magnetism	1
Ground Magnetism	2
Geochemistry	3
I.P. Plan of Profiles	4
Geologic Map of Quijotoa Area	6
Lease Area, I.P. Lines, Geochemistry "	1

	<u>Appendix</u>
Dr. H. O. Seigel. I.P. Interpretation	1
I.P. Survey Data. Hunting Survey Corp.	2
I.P.. Survey Data. Heinrichs Geoexploration.	3


STEBBINS MINERAL SURVEYS INCORPORATEDSUMMARY OF THE PAPAGO EXPLORATION PROGRAM

The Reservation comprises 4,335 square miles (2,774,000 acres). Between September 20 and November 14, 1961 all outcrop was photographed simultaneously in color and black and white as stereo pairs of aerial photography in a scale of 1:10,000 (1 inch equals 833 feet). The outcrop areas approximate 40 per cent of the Reservation.

From November 20, 1961 to August 9, 1962 a geologic study of the aerial photography combined with field investigations was completed. During this period areas of no economic geologic interest were defined and relinquished, as specified by the permit, and areas warranting additional investigation were selected and assigned priorities. This mapping was compiled as 15-minute quadrangles at a scale of 1 inch equals two miles made from enlargements of the Arizona Bureau of Mines County Geologic Maps published at a scale of 1:375,000.


The remainder of the program (August, 1961 to October, 1963) comprised detailed geologic mapping, geochemical sampling, airborne and ground geophysics, and the drilling of one diamond drill hole. A total of 1499 geochemical samples were collected from which 3095 analyses were reported. Two miles of shallow seismic profiles were obtained, approximately 1,700 line miles of aeromagnetic survey were completed, 37 line miles of ground magnetic survey, and 65.4 line miles of induced polarization survey. The one diamond drill hole was drilled to a depth of 168 feet through 85 feet of alluvium.


Two geologic reports have been submitted to the Department of Interior (August, 1962 and February, 1963), in each case at the time land was relinquished as required by the permit.

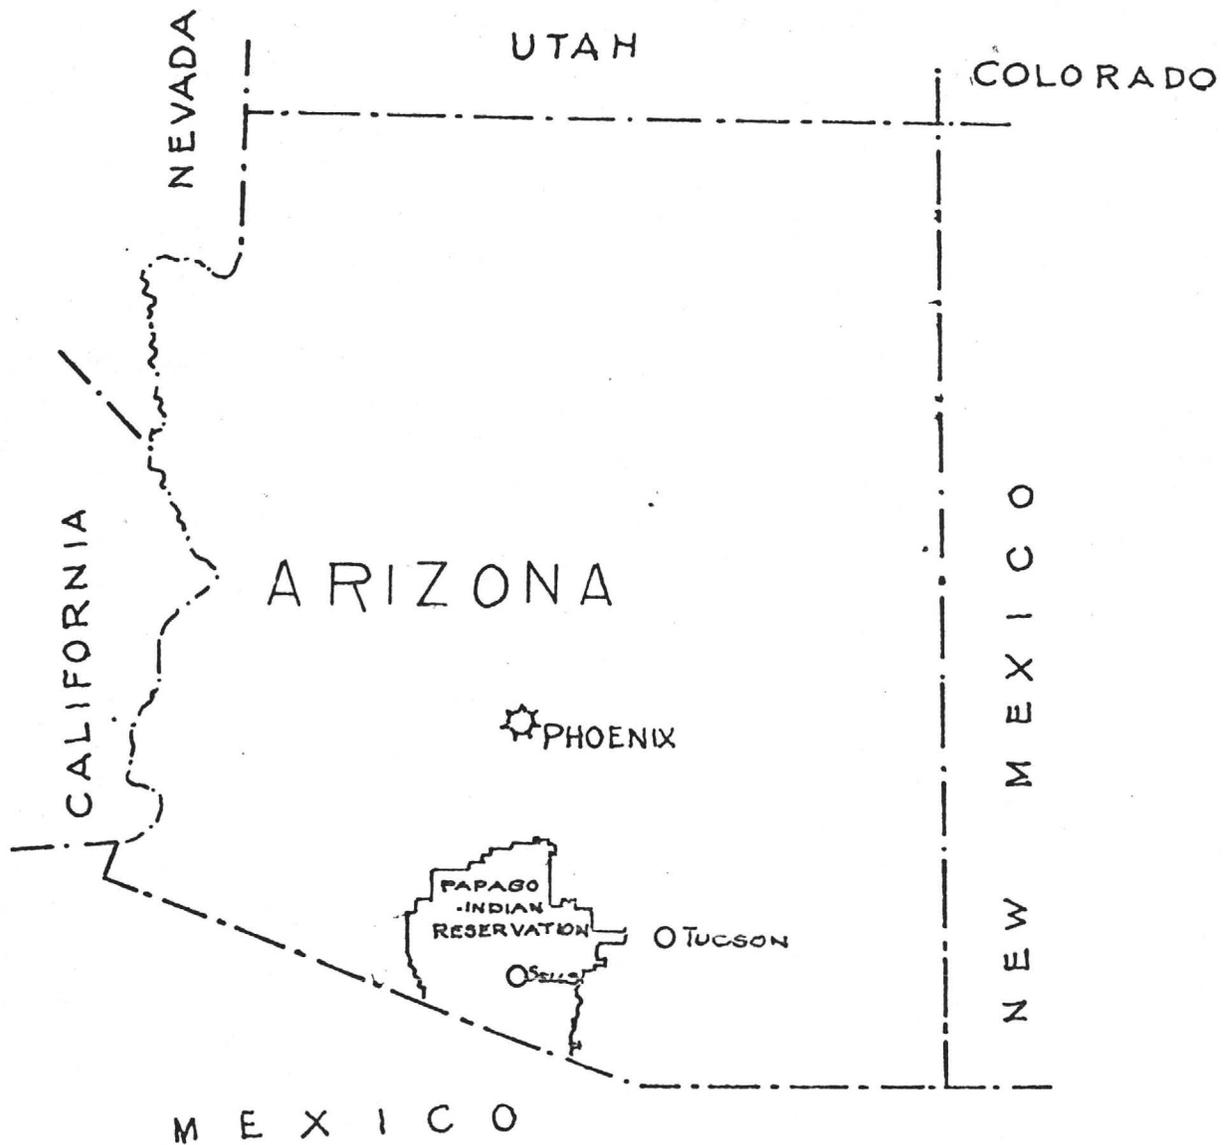

LOCATION MAP
STATE OF ARIZONA
SHOWING
PAPAGO INDIAN RESERVATION


Scale of Miles



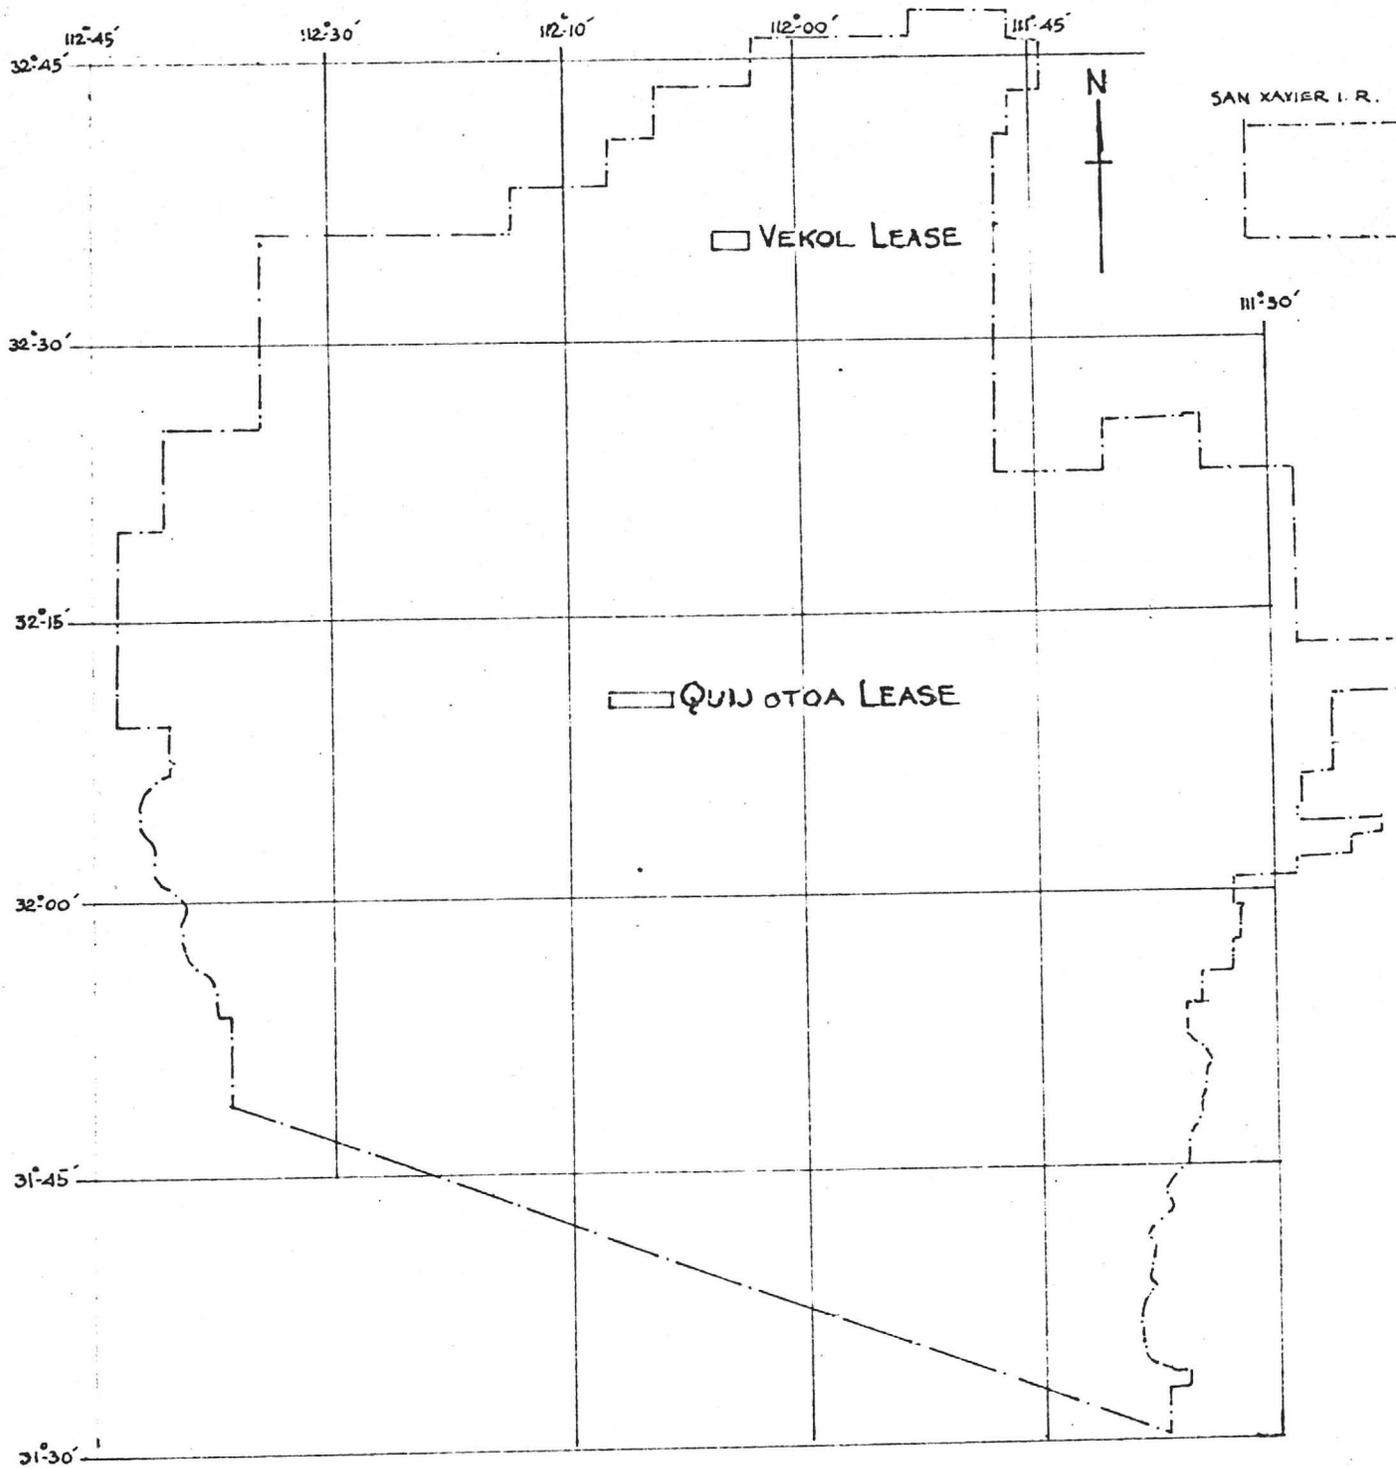


LOCATION MAP
PAPAGO INDIAN RESERVATION
ARIZONA
SHOWING LEASE AREAS
SCALE 1" = 12 MILES

xSif Vaya

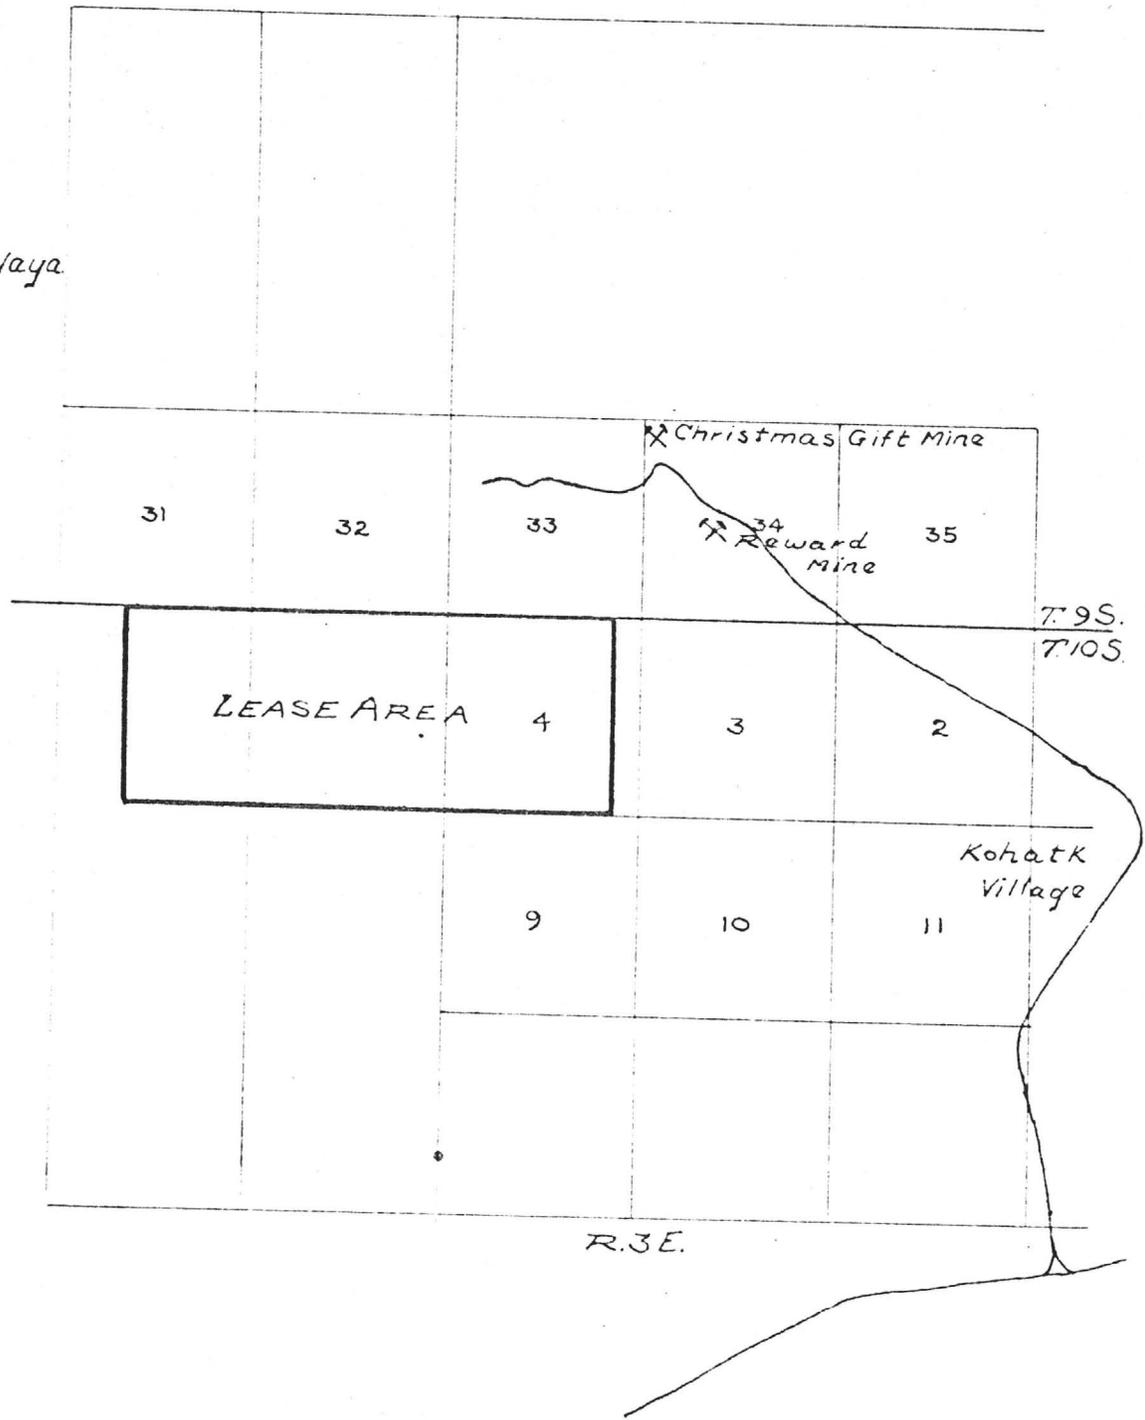

LOCATION MAP
 VEKOL LEASE AREA
 VEKOL MOUNTAIN QUAD
 PINAL COUNTY, ARIZONA
 SCALE 1:62,500

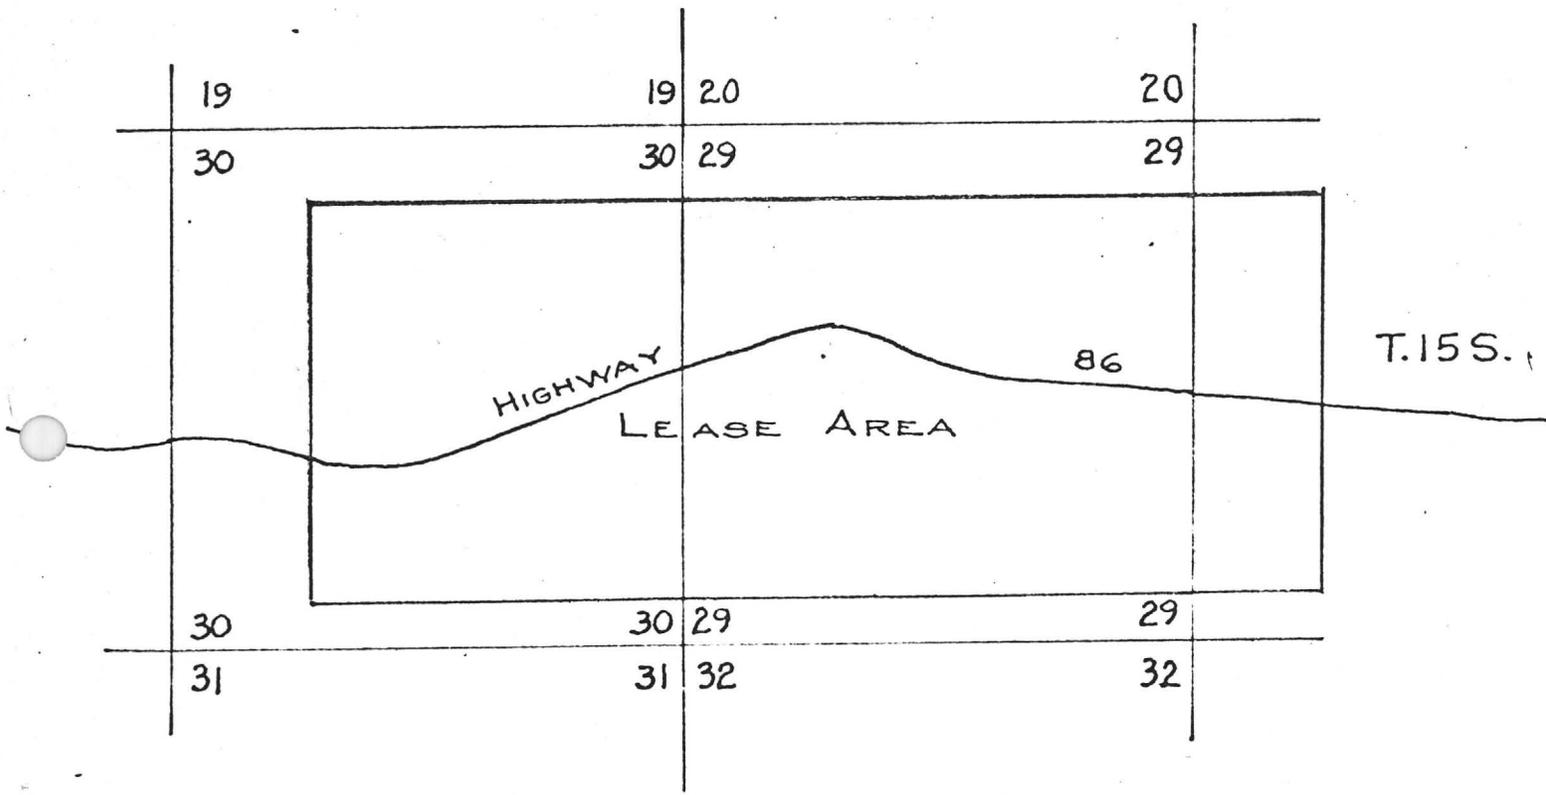

R. 2 E.

LOCATION MAP
QUIJOTOA 4N.W. QUADRANGLE
PIMA COUNTY, ARIZONA
SHOWING QUIJOTOA LEASE AREA

SCALE 1" = 2000'

STEBBINS MINERAL SURVEYS INCORPORATEDVEKOL MOUNTAINSLocation

This range lies in the north of the Papago Indian Reservation and in the southeast corner of Pinal County in Ts. 9 & 10 S. Rs. 2 & 3 E.

Access

The Vekol Mountains are reached from the town of Casa Grande, Pinal County, south seventeen miles on paved road to a turn off to the west to Kohakt village. The Vekol range lies three miles to the west of the village. A number of old unimproved roads give access to the mines in the area.

Topography

The Vekol range runs northwest and is six miles long. The main range is about two miles wide but a group of hills lie to the northeast separated from the main range by a basin $1\frac{1}{2}$ miles wide in which is the abandoned village of Sif Vaya.

The mountains rise to a maximum elevation of 4000 feet. They are bounded on the east by the Santa Rosa Valley, a gravel filled basin ten miles wide with an average elevation of 1700 feet. The Vekol valley lies to the west of the range.

The area of possible economic interest is southwest of the Reward Mine.

Climate

The climate is arid with annual rainfall under ten inches per annum. Winters are cool and summers hot.

Vegetation consists of Cactus and other desert plants.

STEBBINS MINERAL SURVEYS INCORPORATEDGeology

The southern end of the Vekol Mountains near the Reward Mine is composed of Paleozoic sediments, mostly limestone, ranging in age from Cambrian to Pennsylvanian. These are covered by Cretaceous Conglomerate and Tertiary Volcanics. A small stock of Quartz Monzonite Porphyry intrudes the sediments about one mile to the west of the Reward Mine.

Mineralization

Production of 400,000 lbs. of copper is recorded from the Reward Mine.

The ore occurs as small replacement bodies in the Escabrosa (Mississippian) limestone. The mineralization is controlled by faults.

To the south of the Reward, on the same ridge are several prospect pits, shafts and adits which were sunk on similar small deposits. However, the sulphide at the south end of the ridge is predominantly sphalerite which is associated with massive magnetite.

Work Carried out by Stebbins Mineral Surveys

About three man months were spent on the geological and geochemical survey of this area.

The Vekol Mountain area was mapped by M.A. Kaufman on the scale of the aerial photography, approximately 1:10,000. A portion of the map is included with this report.

Two possibilities for further mineralization were considered to exist.

- a. Copper or Zinc replacement bodies in limestone associated with magnetite, beneath gravel.
- b. "Porphyry" type copper mineralization.

STEBBINS MINERAL SURVEYS INCORPORATED

The following work was undertaken to test these possibilities.

- (1) A total intensity magnetic survey was carried out using a Varian Nuclear Precession Magnetometer Model V-4910 mounted in a Bell 47G - 3B helicopter flying at a constant ground clearance of 150 feet with the "bird" at 50 feet ground clearance, along flight lines spaced 1000' apart. A portion of the magnetic contour map compiled from the results of this survey is included as overlay #1 to the geologic map.

A magnetic high was seen to extend from the southwest end of the Reward ridge for about 3000 feet to the southwest.

- (2) A ground magnetic survey was carried out over this anomaly using a Jalander fluxgate instrument. Readings were taken at 100 foot spacing on lines running N30°W, 200 feet apart. Magnetic contours from the results of this survey are shown as overlay #2 to the geologic map.


Zones of magnetite occur both in the Paleozoic limestone and in the underlying Cambrian quartzite. An interpretation of the magnetic data by R.W. Whipple, Geophysical Consultant to Stebbins Mineral Surveys Inc. suggested that the anomalies were caused by further zones of magnetite in sediments beneath from 50 feet to 250 feet of gravel cover.

- (3) To test for sulphide possibly associated with the zones of magnetite, an induced polarization survey was carried out over the area and extended to the west to cover the contact of the sediments with granite in which were recorded scattered anomalous geochemical values in copper from 300 up to 1200 ppm. (See overlay #3 showing geochemical sample locations and values).


A Seigel Associates 7.5 kilowatt pulse type induced polarization unit, rated at 5 amps and 5,000 volts was used with three electrode array configuration at 250, 500 and 1,000 feet electrode spacing. A plan of the chargeability and resistivity profiles is included as overlay #4 to the geologic map.

Interpretation

Four major anomalous zones and three minor are shown on the plan of profiles. An interpretation by Dr. H.O. Seigel is included with this report. (appendix #1).

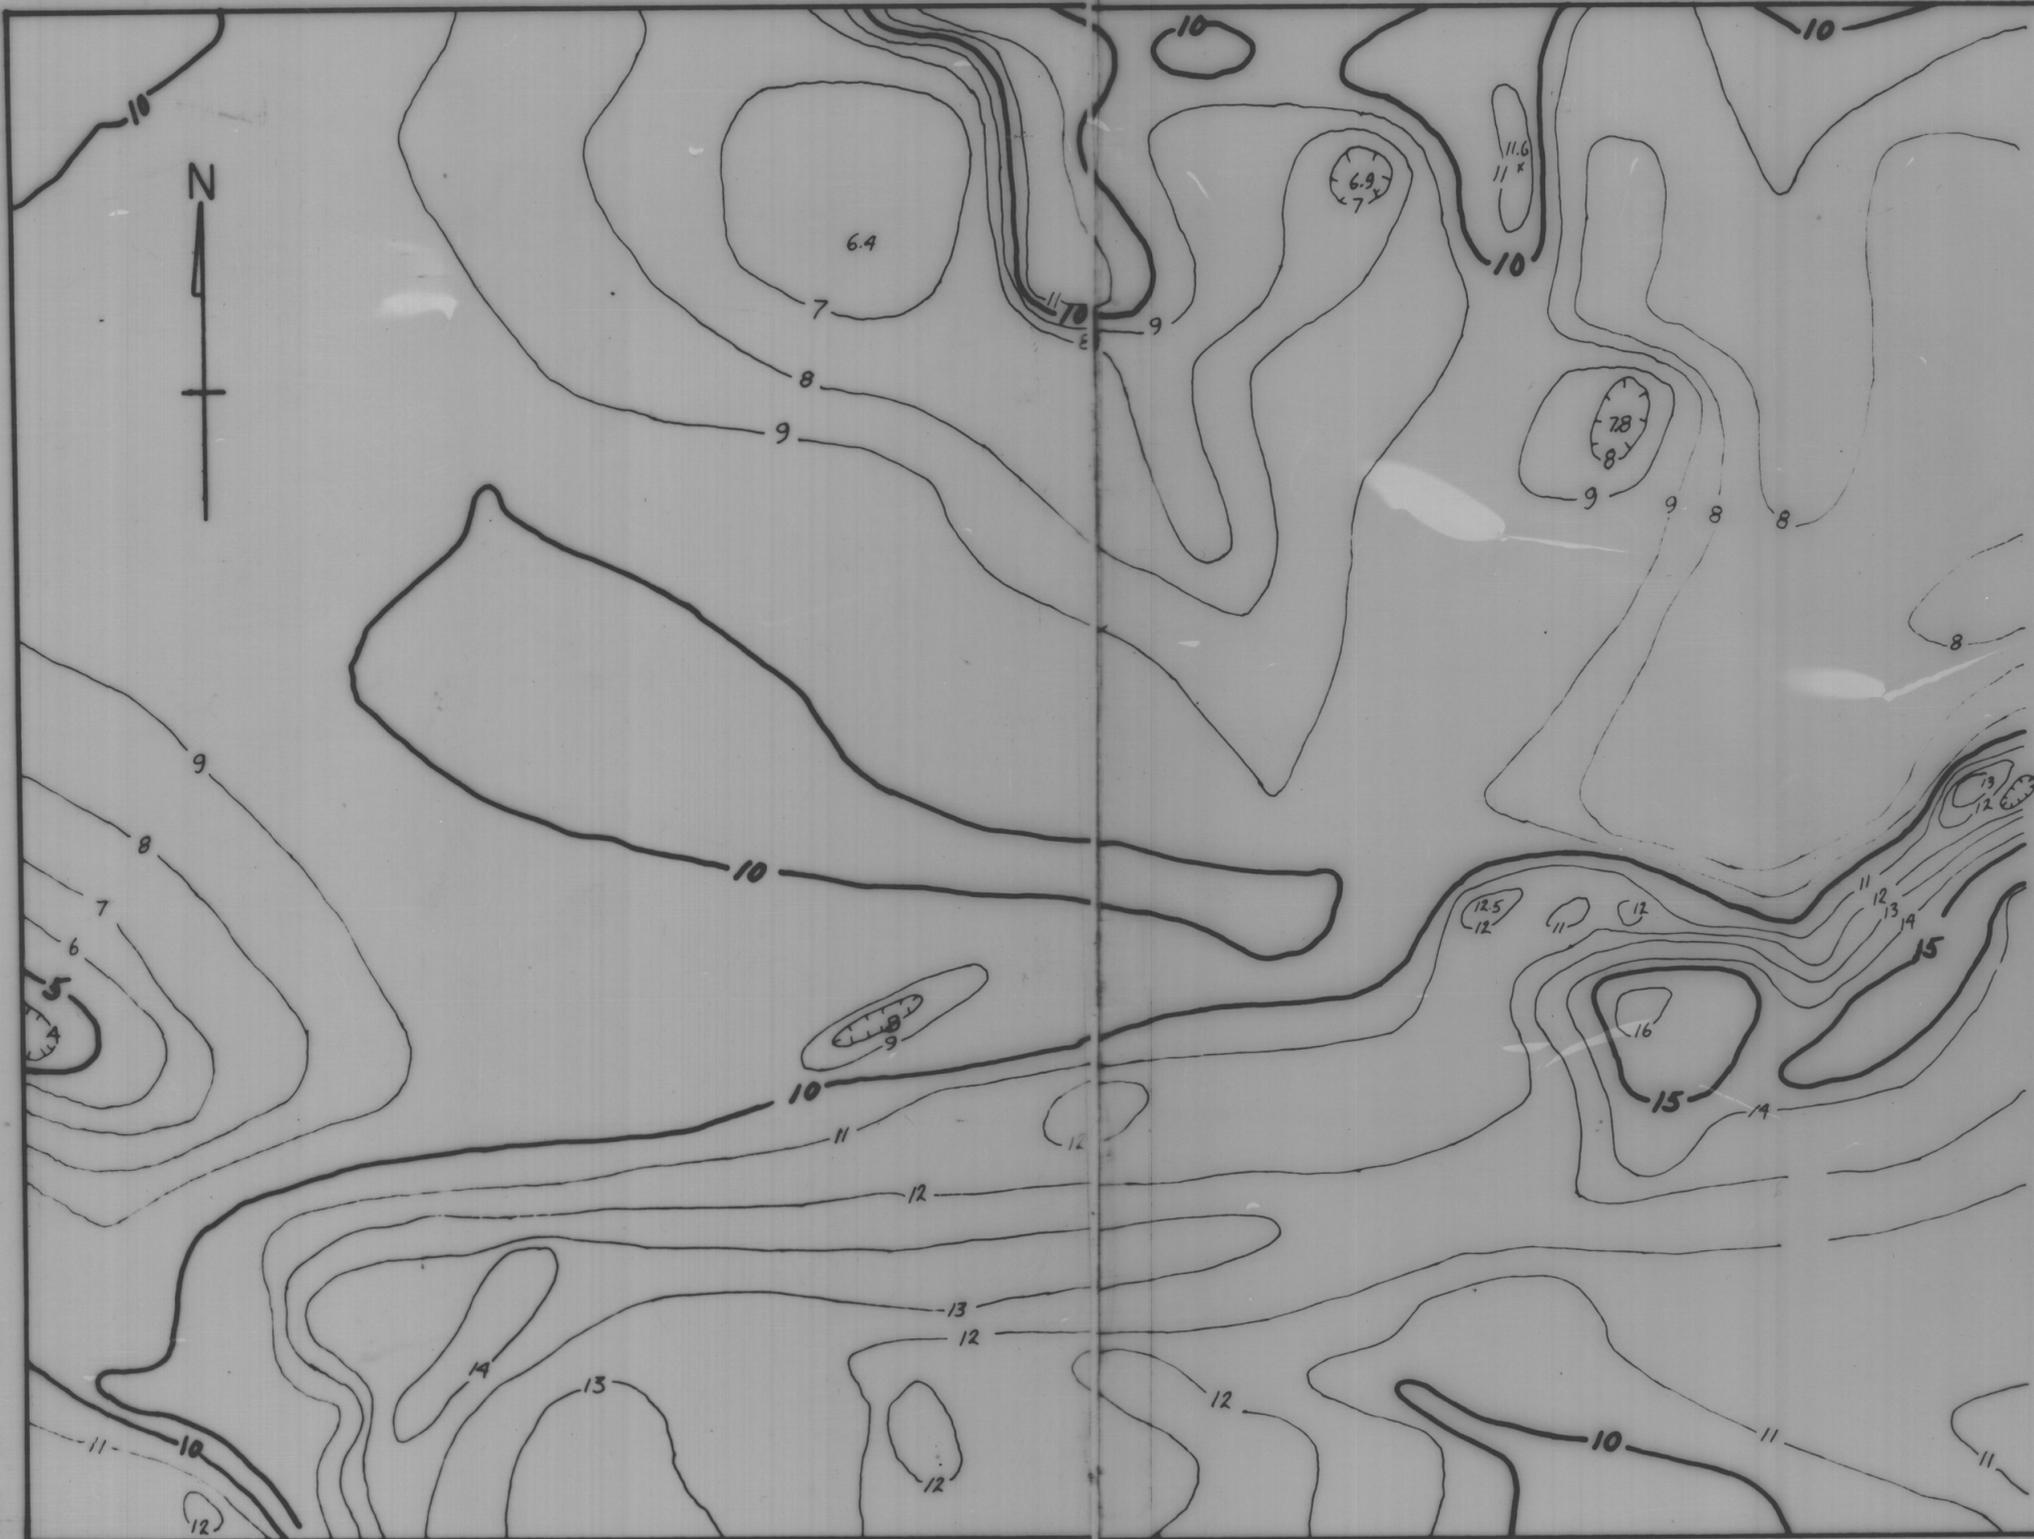

OVERLAY FOR
GEOLOGIC MAP VEKOL MOUNTAINS
SHOWING AEROMAGNETIC SURVEY
CONTOURS INTERVAL 100 (APPROX.)
SCALE 1" = 1000' (APPROX.)

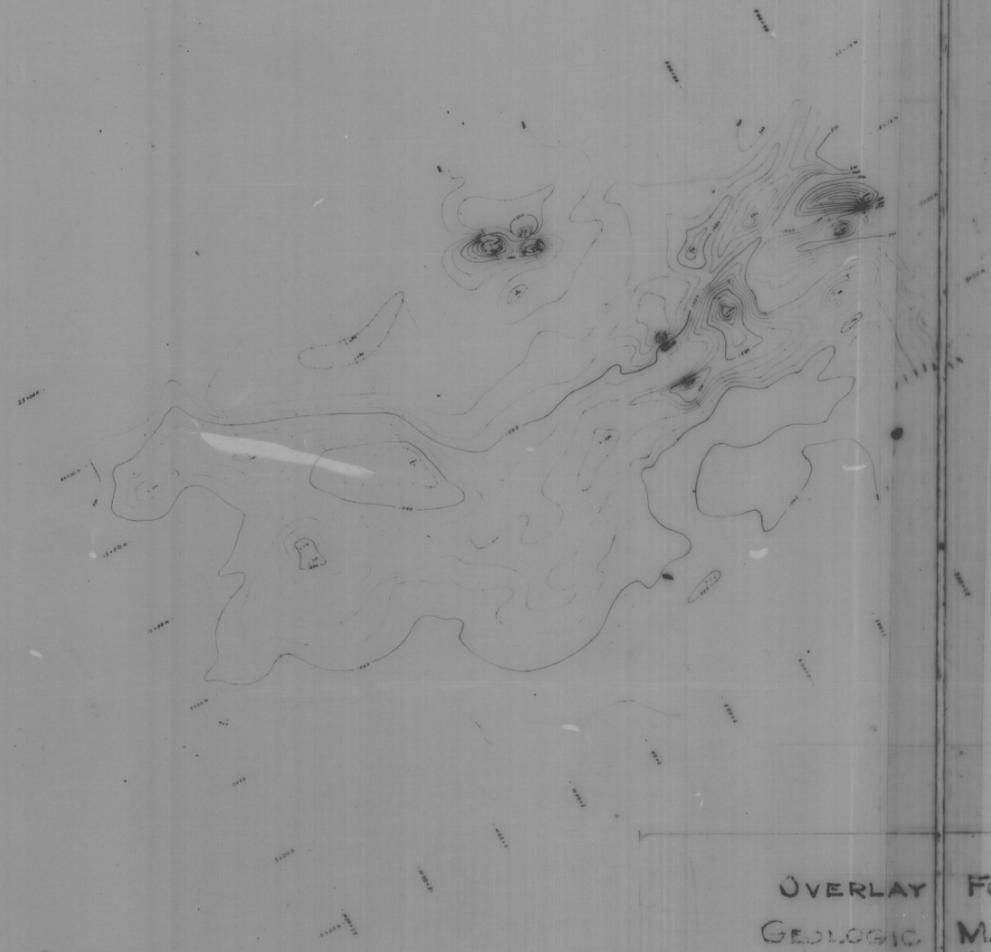


OVERLAY FOR
GEOLOGIC MAP
VEKOL MOUNTAINS
SHOWING GROUND MAGNETIC
SURVEY CONTOURS
CONTOUR INTERVAL 100'
SCALE 1"=1000'

+

T

T

T

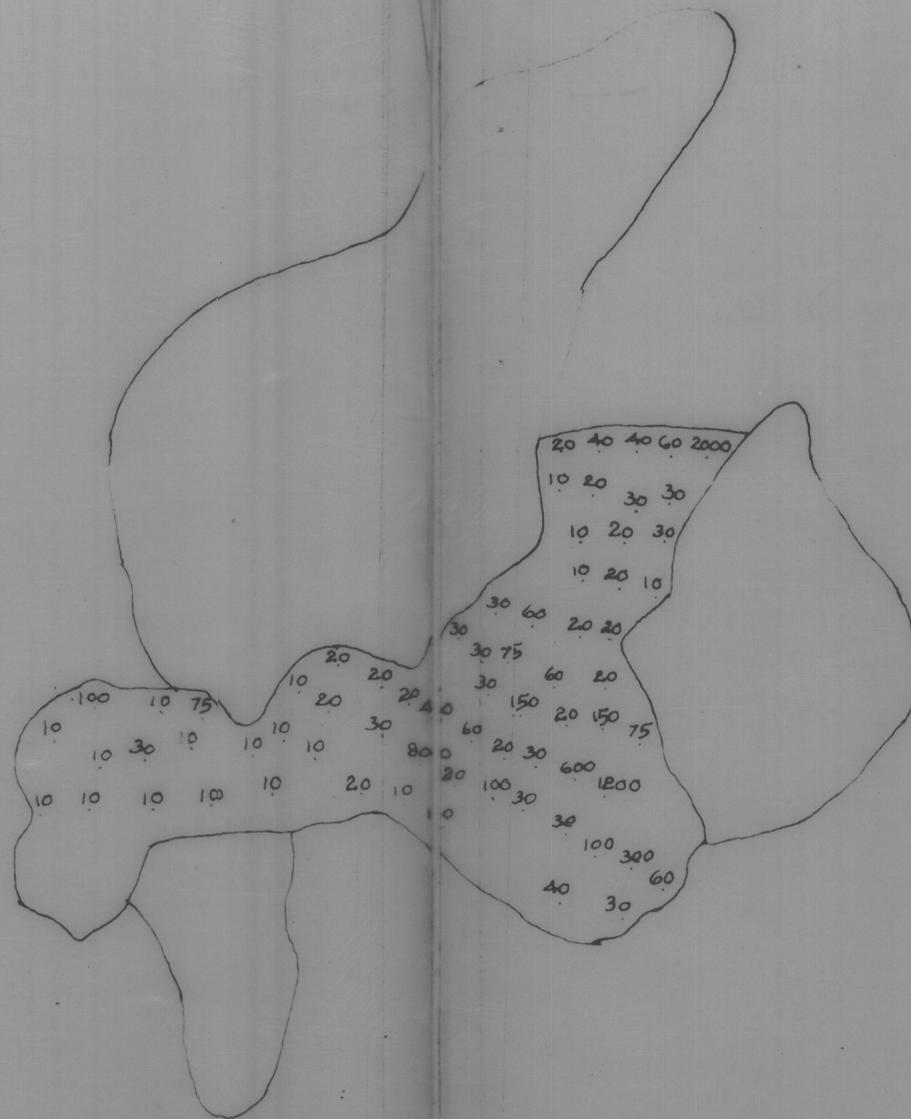

VEKOL MOUNTAINS

OVERLAY TO GEOLOGICAL MAP
 ROCKCHIP GEOCHEMICAL SURVEY
 COPPER PARTS PER MILLION,
 SCALE 1:1000

OVERLAY FOR GEOLOGIC MAP
VEKOL MOUNTAINS
 SHOWING I.P. PROFILES


LEGEND


CHARGEABILITY	RESISTIVITY	SPACING	ARRAY	CHARGEABILITY > 6.0 MILLISECOND
○—○	○—○	250'	3	▨ a=250'
○- - -○	○- - -○	500'	3	▩ a=500'

SCALES

CHARGEABILITY
 RESISTIVITY
 PLAN

1/2 INCH = 5.0 MILLISECOND
 1/2 INCH = 500 Ω METERS
 1 INCH = 1,000'

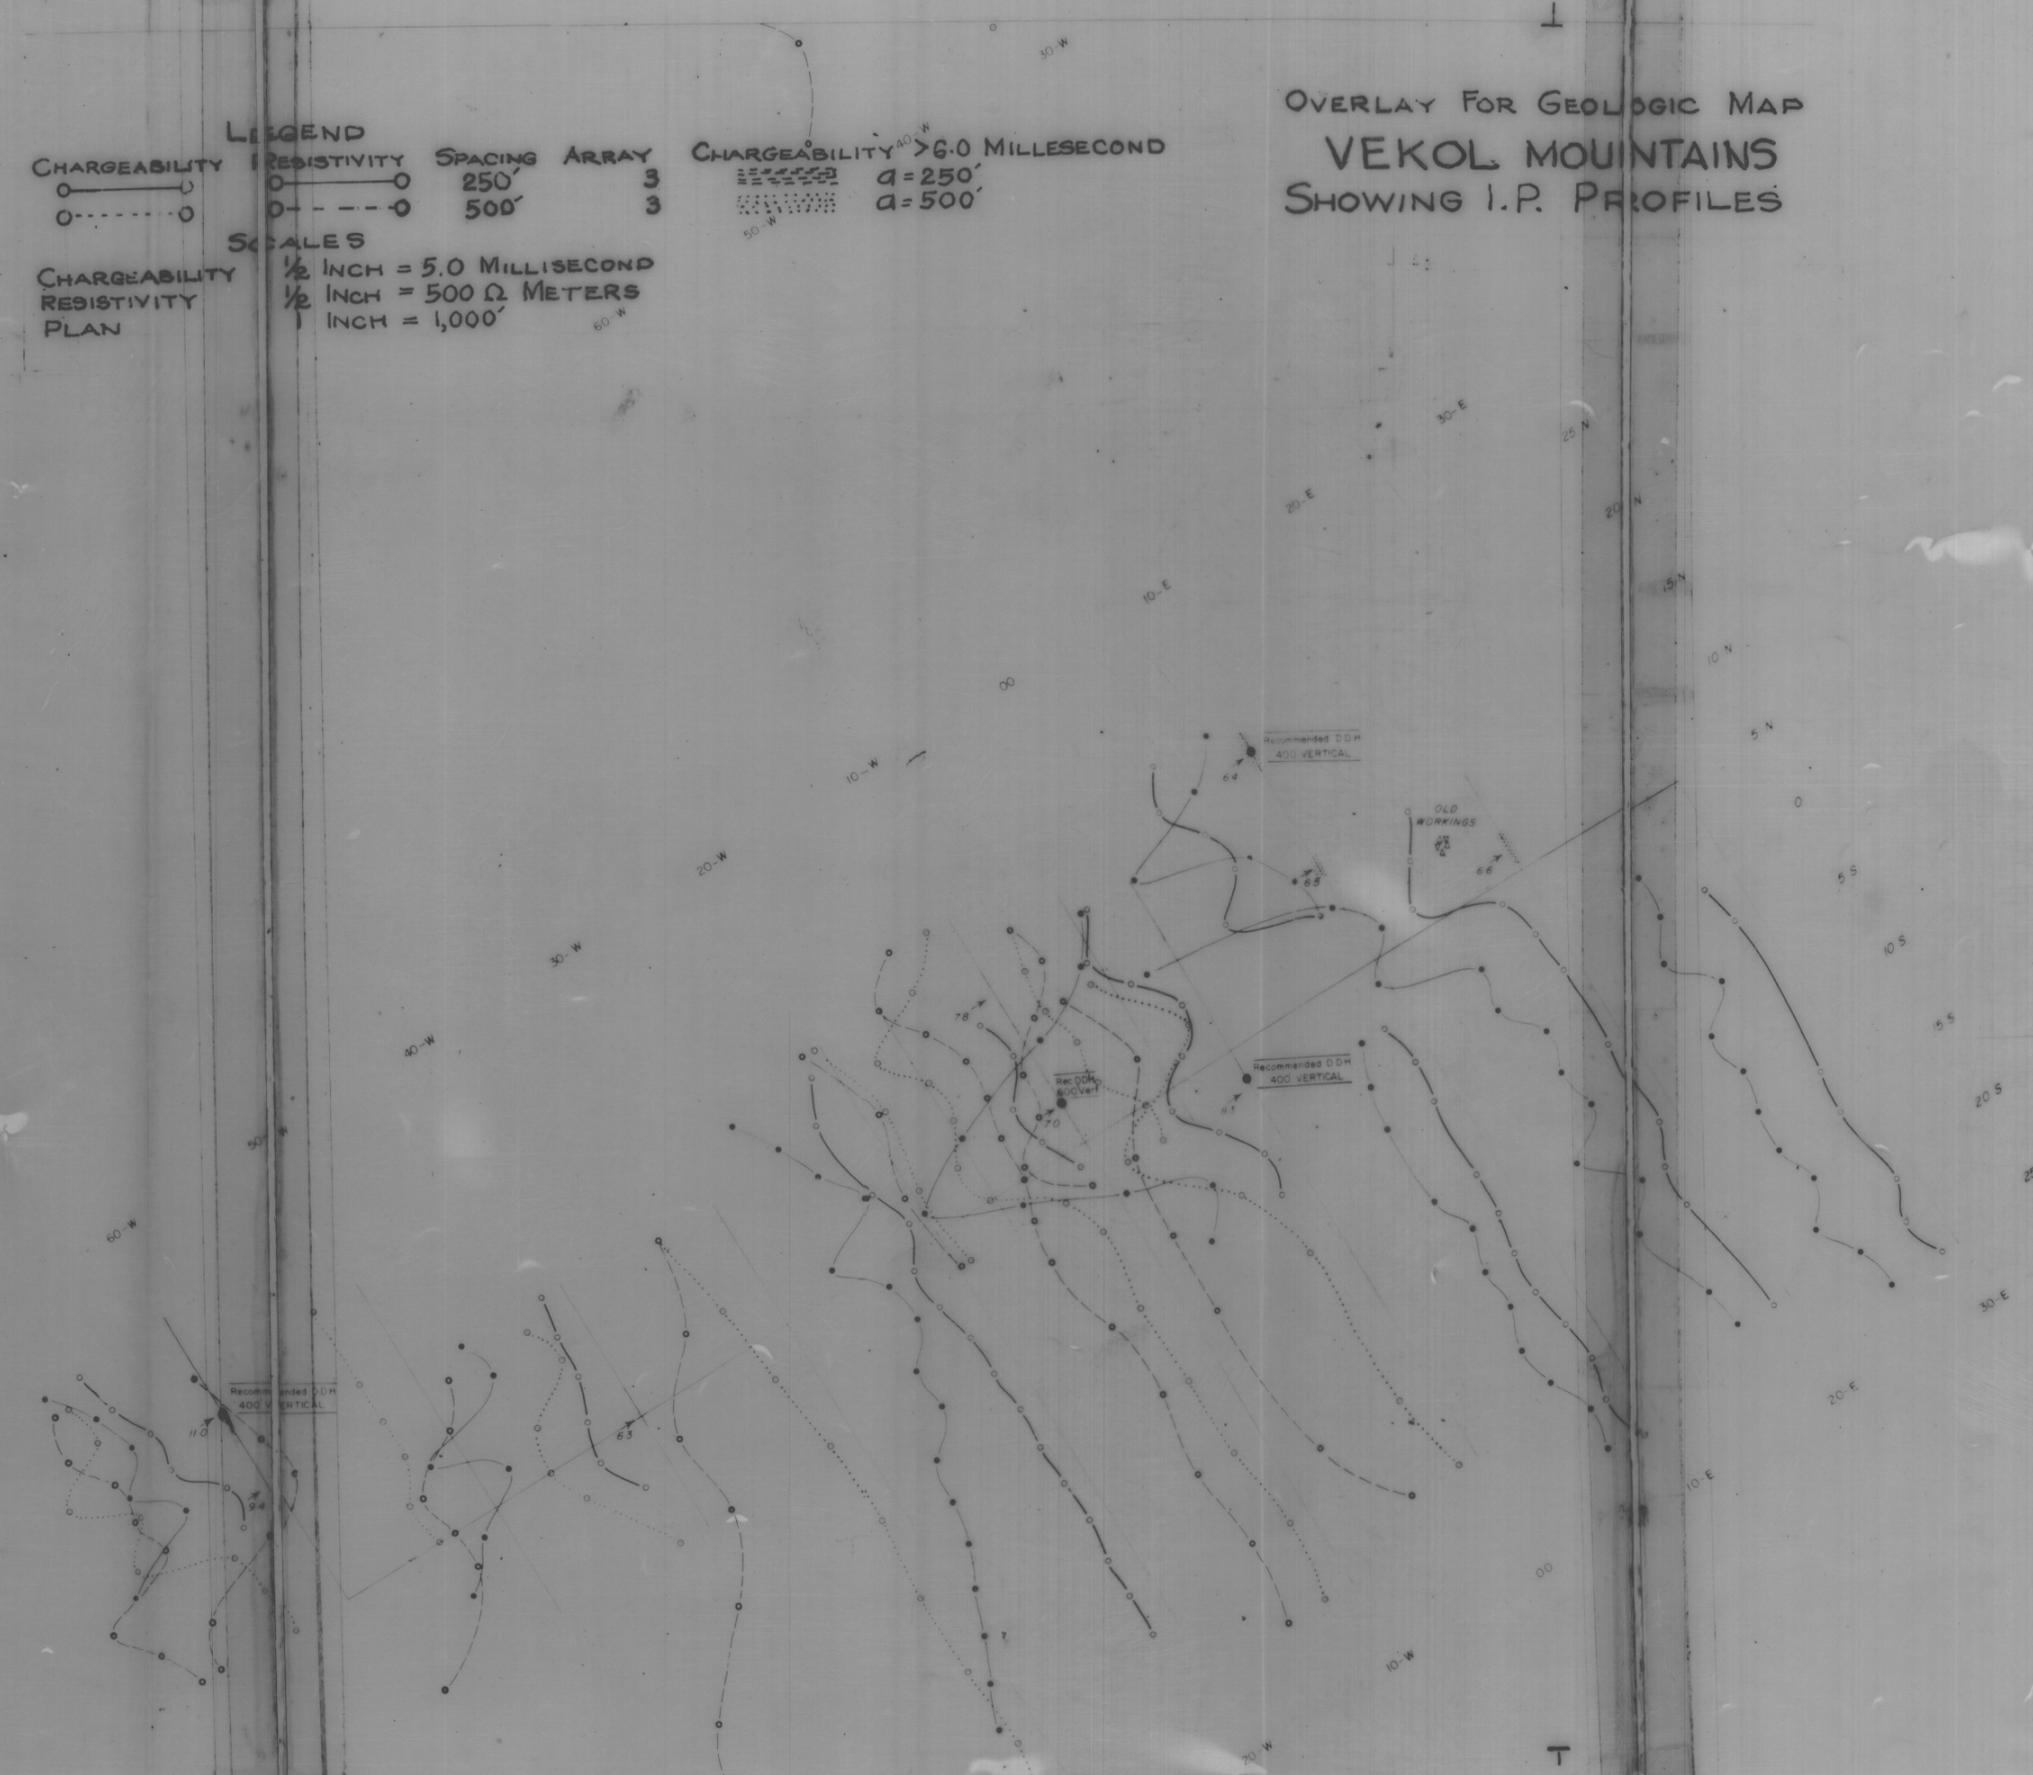




LEGEND

- Tv TERTIARY VOLCANICS (ANDESITE TO BASALT) AND RELATED INTRUSIVES.
- an ANDESITE PORPHYRY FELDSPAR-HORNBLEND PORPHYRY IN FINE GRAINED MATRIX. INCLUDES SEDIMENTARY AND INTRUSIVE ROCK COMPLEX.
- Fine grained acidic intrusive (quartz porphyry to quartz monzonite). (probably tertiary).
- COARSE GRAINED PORPHYRITIC GRANITE (WITH ORTHOCLASE PHENOCRYSTS) (AGE UNKNOWN).
- Ks CRETACEOUS - CONGLOMEATE, SILTSTONE AND QUARTZITE. RED EXCEPT BASAL UNIT. INCLUDING AGGLOMERATE UNITS.
- PENNSYLVANIAN LIGHT GRAY FOSSILIFEROUS NAGO LIMESTONE.
- Ms MISSISSIPPIAN DARK GRAY ESCABROSA LIMESTONE.
- Dn DEVONIAN TAN MARTIN LIMESTONE.
- Cambrian chiefly brown clastic sediments (Abrigo type limestone occurs on top of section).
- Cr Cambrian pure white to tan fine grained quartzite (Troy type).
- Precambrian (Archean) highly contorted "Pinal" type metamorphics. Chiefly quartz muscovite gneiss.

-  FAULT ZONE
-  OUTCROP BOUNDARY
-  MAGNETITE OCCURRENCE
-  MINERALIZATION OR ALTERATION
-  CONTACTS
-  ROADS
-  SCHISTOSITY
-  STRIKE AND DIP OF BEDS

**GEOLOGIC MAP
OF
PART OF VEKOL MOUNTAINS
PAPAGO INDIAN RESERVATION, ARIZONA**

SCALE 1" = 1000' APPROX.

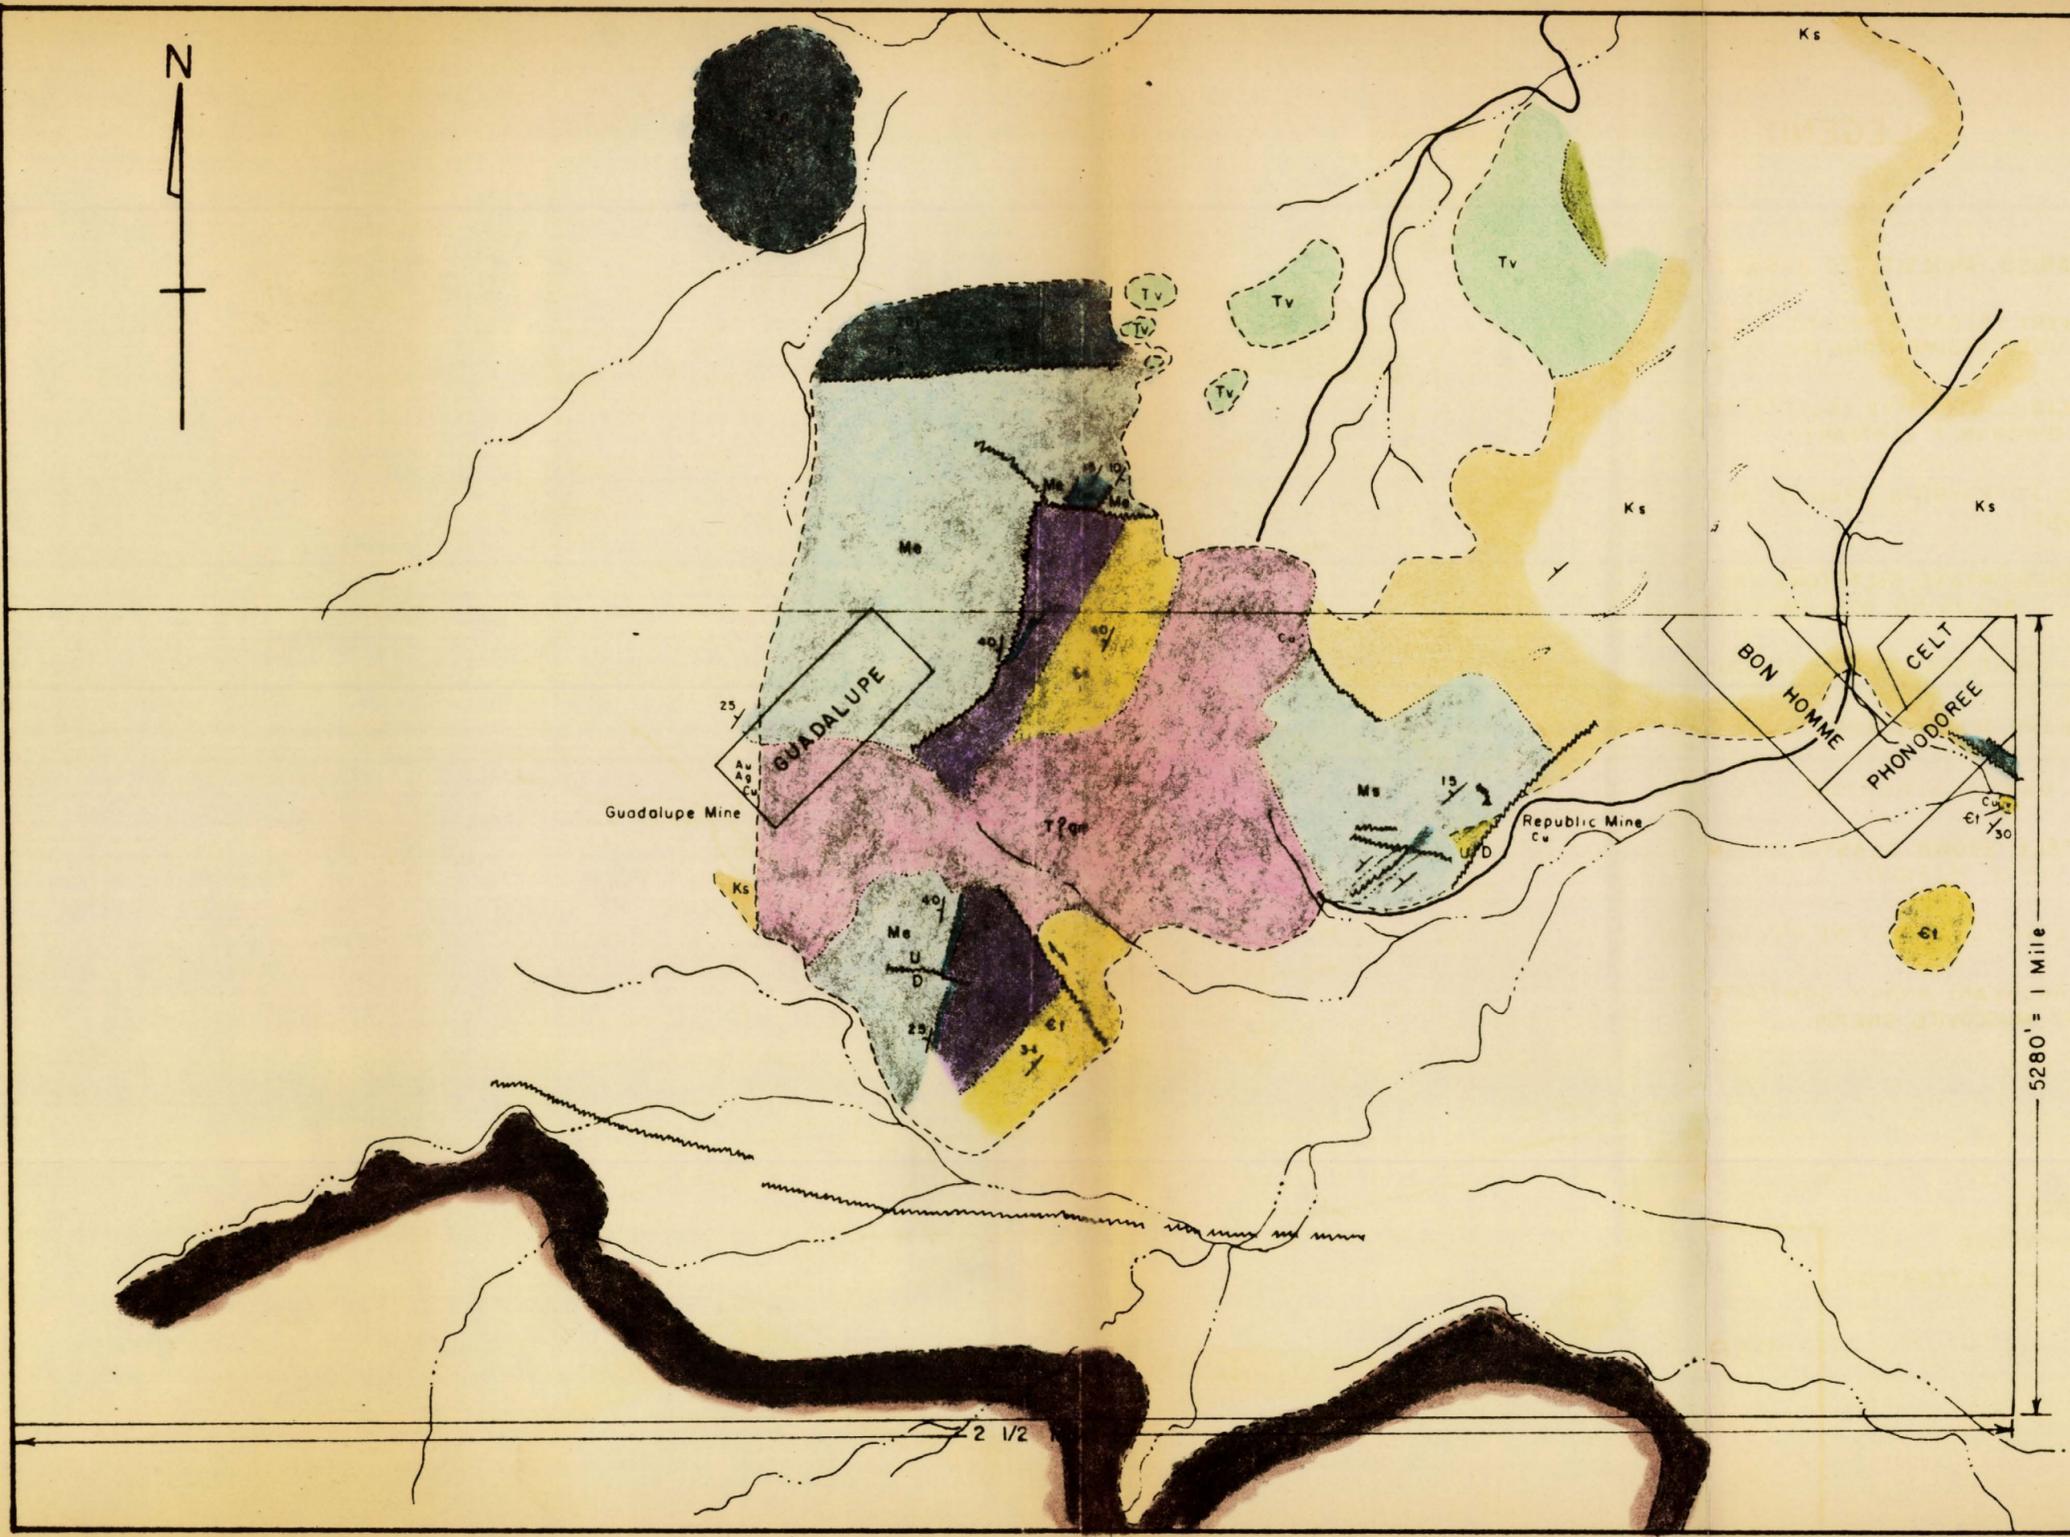

A number of possibilities exist. Depths to sulphide as determined by Seigel are greater than the depths to magnetite as estimated by Whipple. It is possible that the magnetite zones occur in the Paleozoic rocks overlying sulphide mineralization in Precambrian Pinal schist.

The pattern of the induced polarization anomalies may indicate a steeply dipping tabular body of sulphide whose sub outcrop is repeated by faulting. Whipples interpretation of the magnetic results shows a series of NE - SW faults.

The series of anomalies is not fully explored to the west.

Application for Lease

Application is made for a lease in accordance with the terms of the Mineral Prospecting Permit No. 14-20-0450-3736.

The boundary of the lease area, a rectangle $2\frac{1}{2}$ miles east-west by one mile north-south, runs as follows:

From S.E. corner of Sec. 33 T 9 S. R 3 E., $\frac{1}{8}$ mile west to the northeast corner of the lease area.

From northeast corner of the lease area $2\frac{1}{2}$ miles west to the northwest corner of the lease area.

From northwest corner of the lease area 1 mile south to the southwest corner of the lease area.

From the southwest corner of the lease area $2\frac{1}{2}$ miles east to the southeast corner of the lease area.

From the southeast corner of the lease area north 1 mile to the northeast corner of the lease area (starting point).

This area is shown of the geologic map.

From this area are withdrawn the following valid mineral claims which have prior rights:

STEBBINS MINERAL SURVEYS INCORPORATED

	<u>Sq. ft.</u>
All of Guadalupe	900,000
Part of Bon Homme	737,950
Part of Phonodoree	882,000
Part of Phenomenon	55,400
Part of Celt	<u>243,750</u>

Total 2,819,100 sq.ft. = 64.71 acres

Total area	1600.00	acres
Less Claims	<u>64.71</u>	
Net area of lease	1535.29	acres

The claims are plotted on the geologic map, but their location is not accurately known so the area is subject to survey and the figure for the net area of the lease is subject to correction.

STEBBINS MINERAL SURVEYS INCORPORATEDQUIJOTOA AREALocation

Three miles west of Covered Wells Trading Post, which is 49 miles east of Ajo on Highway 86 between Tucson and Ajo. The area lies in T 15 S. R 2 E. Pima County, Arizona.

Access

The area lies astride highway 86. A number of old unimproved mine roads give access to the Quijotoa and Brownell Mountains.

Topography

The area is in a group of low hills between the Quijotoa Mountains to the south and the Brownell and Sierra Blanca Mountains to the north. The elevation is about 2500 feet and local relief is about 300 feet.

Climate

Climate and vegetation are similar to those of the Vekol Mountains.

Geology

The Quijotoa Mountains consist of a complex of acid igneous intrusives. At the north end of the range, on either side of highway 86, the rock is a fine grained quartz porphyry which is considered to be intrusive. Within an area of about one square mile a number of brecciated and iron stained zones occur. In places fine grained tourmaline forms the matrix of the breccia. The similarity of this rock to that from a copper bearing breccia pipe at Cananea, Sonora, Mexico, first drew attention to the area. The quartz porphyry in the vicinity of the breccia zones is altered, fractured and stained with limonite and hematite. The breccia zones and the areas of alteration are shown on the geologic map of Quijotoa area.

STEBBINS MINERAL SURVEYS INCORPORATEDMineralization

There is no record of mineral production from the immediate area, but copper and silver have both been produced in small quantities in the Quijotoa and Brownell Mountains.

Work Carried out by Stebbins Mineral Surveys Inc.

About three man months were spent on geological mapping. An area of about 50 square miles in the Brownell Mountains and the northern part of the Quijotoa range was mapped on a scale of 1" : 1000' by K. Droste. Alteration in the area of the breccia zones was mapped in detail by M.A. Kaufman.

A portion of the geologic map showing alteration zones is included with this report, Geological Map of Quijotoa Area.

The possibility of disseminated copper mineralization in the quartz porphyry and in the breccia zones was considered worth testing.

Geochemistry

Some rock chip samples from areas of outcrop were assayed by hot extraction method for traces of copper and molybdenum. One small area was slightly anomalous in molybdenum (five times back ground). Copper values were uniformly near back ground. Values are shown on the overlay to the geologic map.

Geophysics

An induced polarization survey with a Hunting 2.5 kilowatt pulse type unit, using the three electrode array configuration at 250 feet and 500 feet spacing was carried out over the area.

An anomaly was recorded in an area 3000 feet east-west by 2000 feet north-south roughly where alteration in the quartz porphyry is strongest. The anomaly is still "open" to the east and west.

Chargeability varies from 6.6 milliseconds to 14 milliseconds against a background of about 2 milliseconds. Resistivity remained constant at 180-300 ohm-meters.

STEBBINS MINERAL SURVEYS INCORPORATED

These results could be caused by sulphide mineralization of from 1% to 3% by volume at a depth of 45 feet to 150 feet. Copies of the resistivity and chargeability profiles together with an interpretation by E.B. Nichols are included in this report. (appendix #2).

At the request of Dr. James A. Noble, consultant to the Papago Exploration Co. a second induced polarization survey was carried out over the same area using variable frequency equipment. This work was done by Heinrichs Geosurveying Co. using Geoscience equipment and the expanding dipole-dipole or Eltran electrode configuration. The results of this work correlate well with those of the previous survey.

The highest percent frequency effect is on line #2. The anomaly is interpreted as due to sulphide, which attenuates with depth and is therefore possibly a horizontal layer. Copies of the induced polarization data of this survey and an interpretation by F. Seward are included with this report. (appendix #3).

Application for Lease

Application is made for a lease in accordance with the terms of the Mineral Prospecting Permit No. 14-20-0450-3736.

The boundary of the lease area, a rectangle two miles east-west by $3/4$ mile north-south, runs as follows:

From a point $1/8$ mile south of the southwest corner of Sec. 19 T 14 S, R 2 E, it is $1/2$ mile east to the northwest corner of the lease area.

From the northwest corner of the lease area $3/4$ miles south to the southwest corner of the lease area.

From the southwest corner of the lease area two miles east to the southeast corner of the lease area.

From the southeast corner of the lease area $3/4$ miles north to the northeast corner of the lease area.

From the northeast corner of the lease area two miles west to the northwest corner of the lease area (starting point).

This area is shown on the overlay to the geologic map.

STEBBINS MINERAL SURVEYS INCORPORATED


From the lease area are withdrawn the following valid mineral claims which have prior rights.

	<u>Sq. ft.</u>	
Part of Standard Gold # 1	262,500	
Part of Standard Gold # 2	150,000	
Part of Red Devil	<u>600,000</u>	
Total	1,012,500	= 23.24 acres
Total area	960.00	acres
Less Claims	<u>22.34</u>	
Net area of lease	936.76	acres

The claims are plotted on the overlay to the geologic map but their exact location is not known. The sections in the area have not been surveyed. There is a preliminary topographic map (subject to correction) on a scale of 1:24,000 published by the U.S.G.S. as Quijotoa 4 N.W., Pima County, Arizona.

The claims and the lease area are subject to survey and the net area of the lease is subject to correction.

24	19
25	30

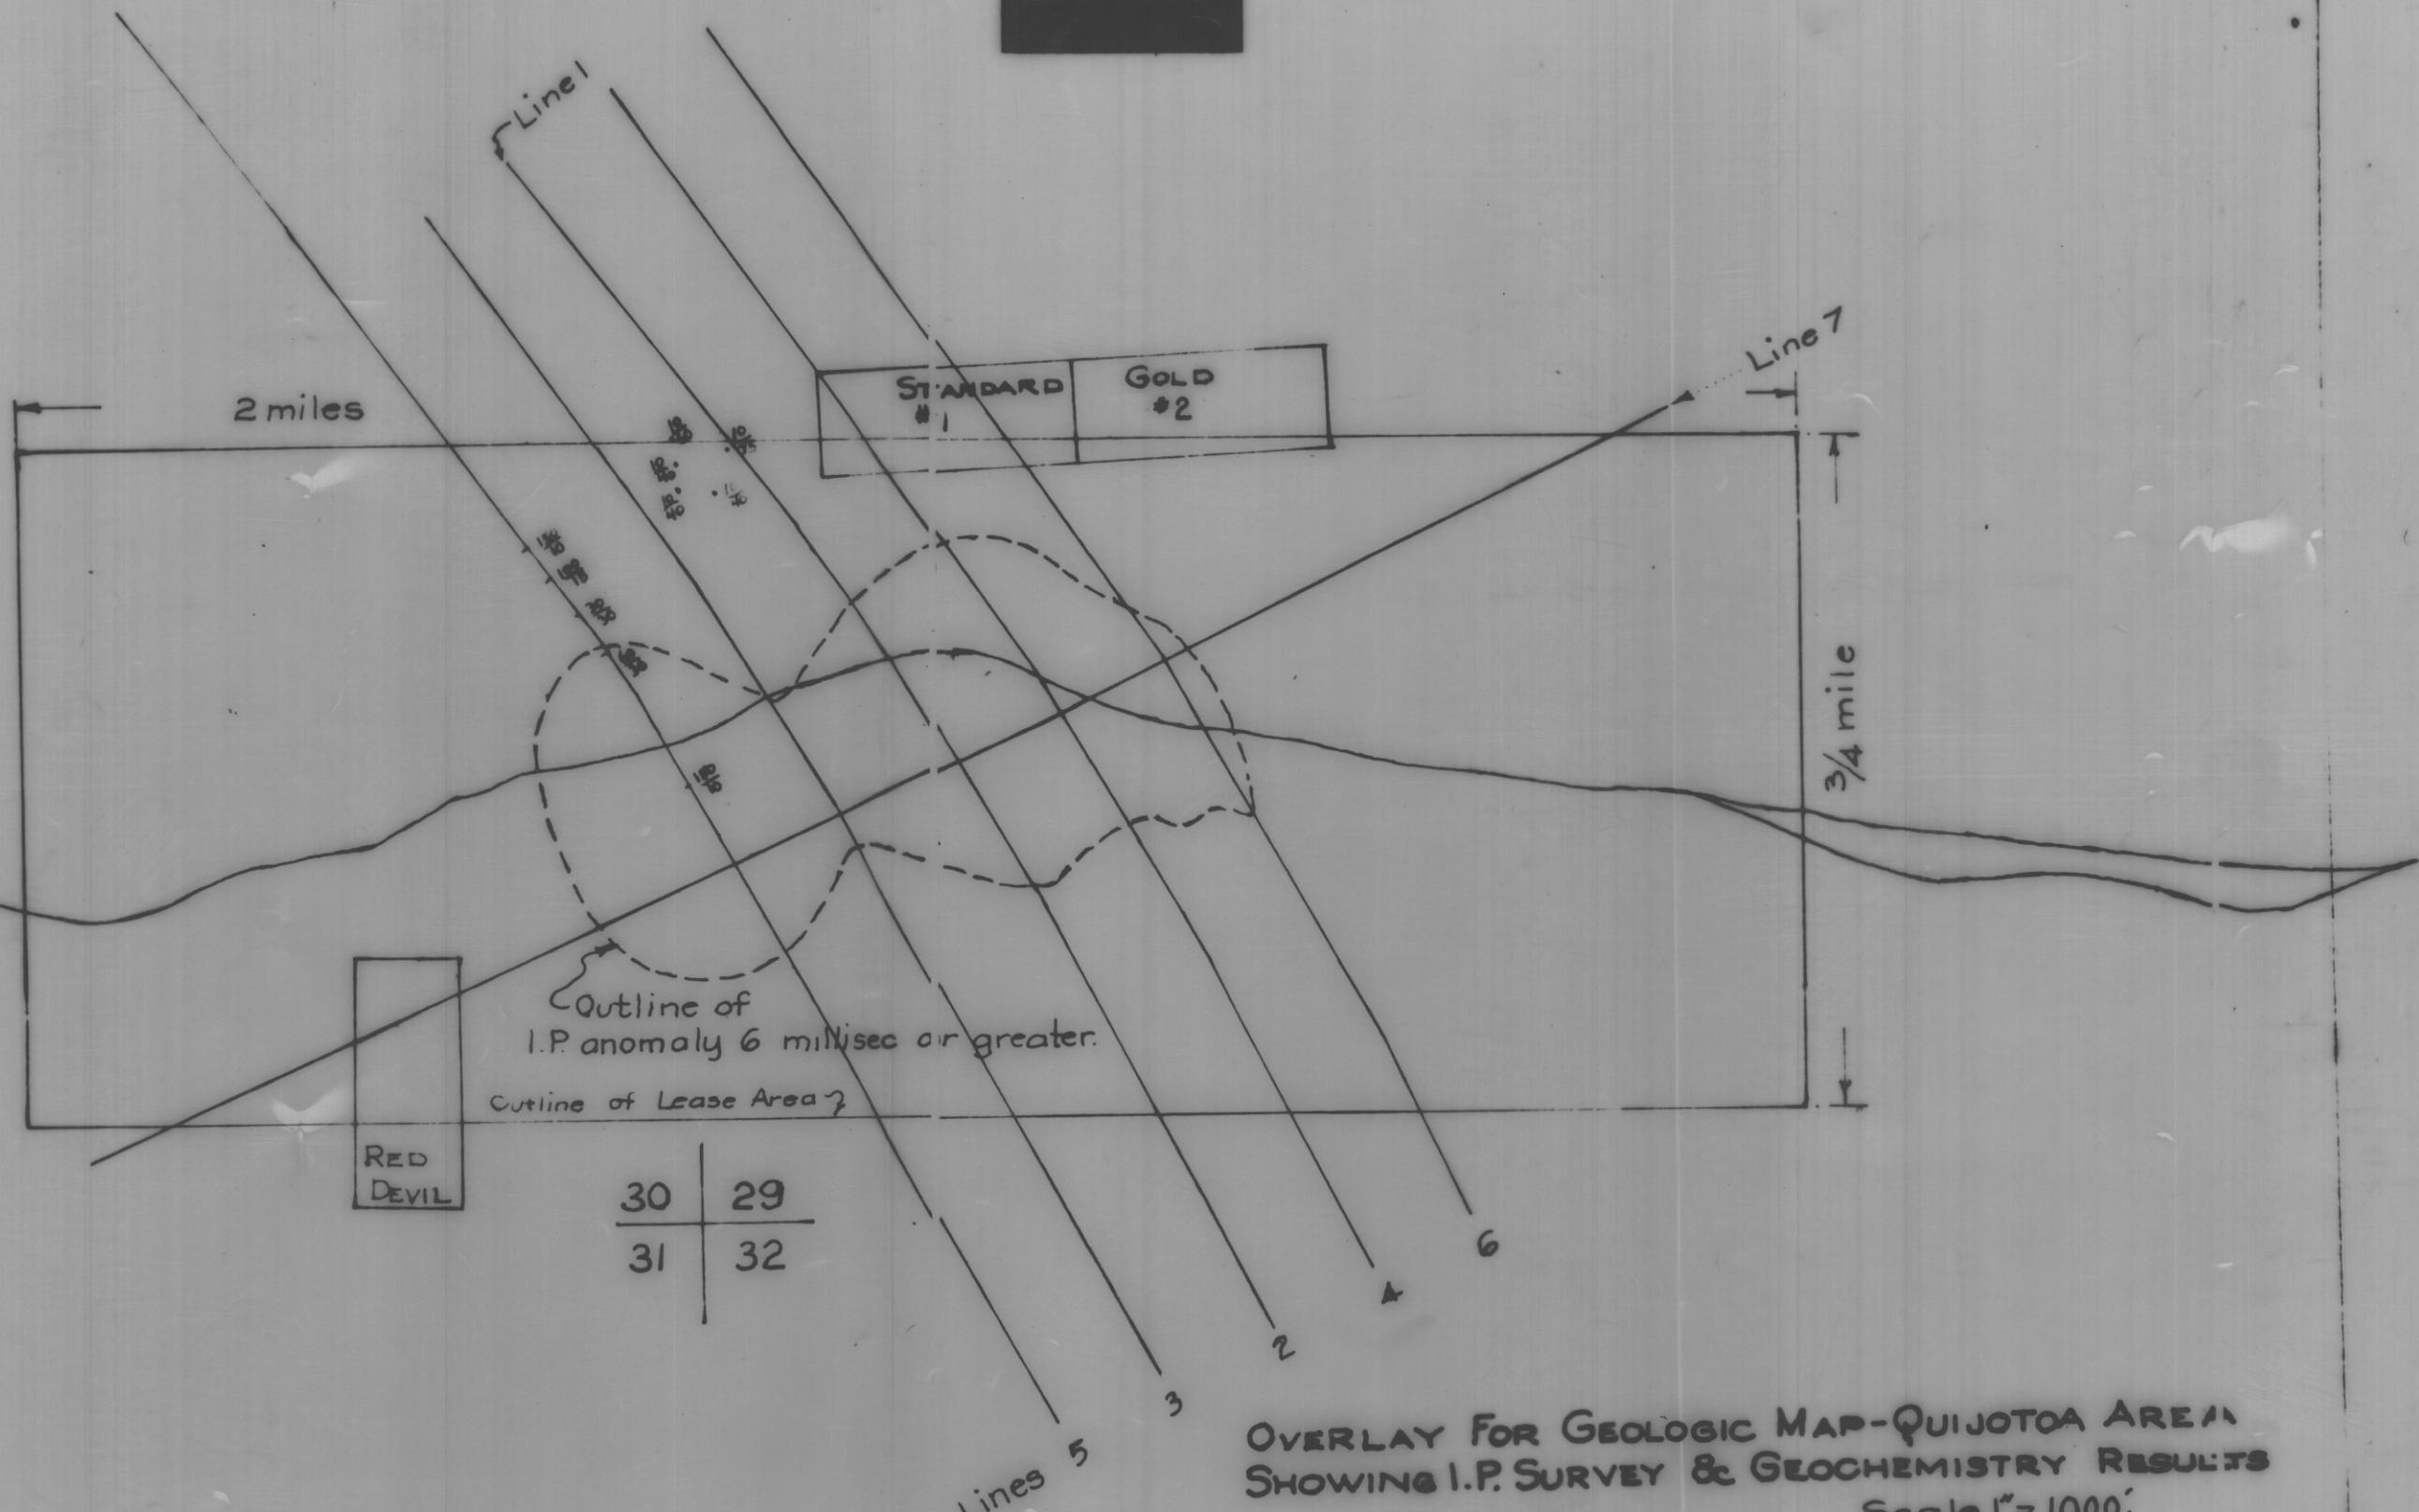


OVERLAY FOR GEOLOGIC MAP-QUIJOTOA AREA
 SHOWING I.P. SURVEY & GEOCHEMISTRY RESULTS
 Scale 1" = 1000'

10 PARTS PER MILLION COPPER
 60 PARTS PER MILLION MOLYBDENUM

GEOLOGICAL MAP - QUIJOTOA AREA PAPAGO INDIAN RESERVATION

Approximate scale 1:10,000

- Qal Alluvium
- Basalt
- Altered brecciated zone. Alteration consists of silica, Black Tourmaline, Limonite and hematite with minor magnetite in one location. Breccia contains fragments of qp in matrix of silica and Tourmaline.
- Altered Brecciated zone: Similar to above but no visible breccia fragments.
- Quartz Monzonite.
- Quartz diorite.
- GR Granite
- Quartz porphyry: Rock consists of fine ground white siliceous ground mass with quartz eyes. In some areas both quartz and feldspar phenocrysts occur. Much of this unit is probably intrusive.
- Andesite porphyry: -This unit is probably intrusive.

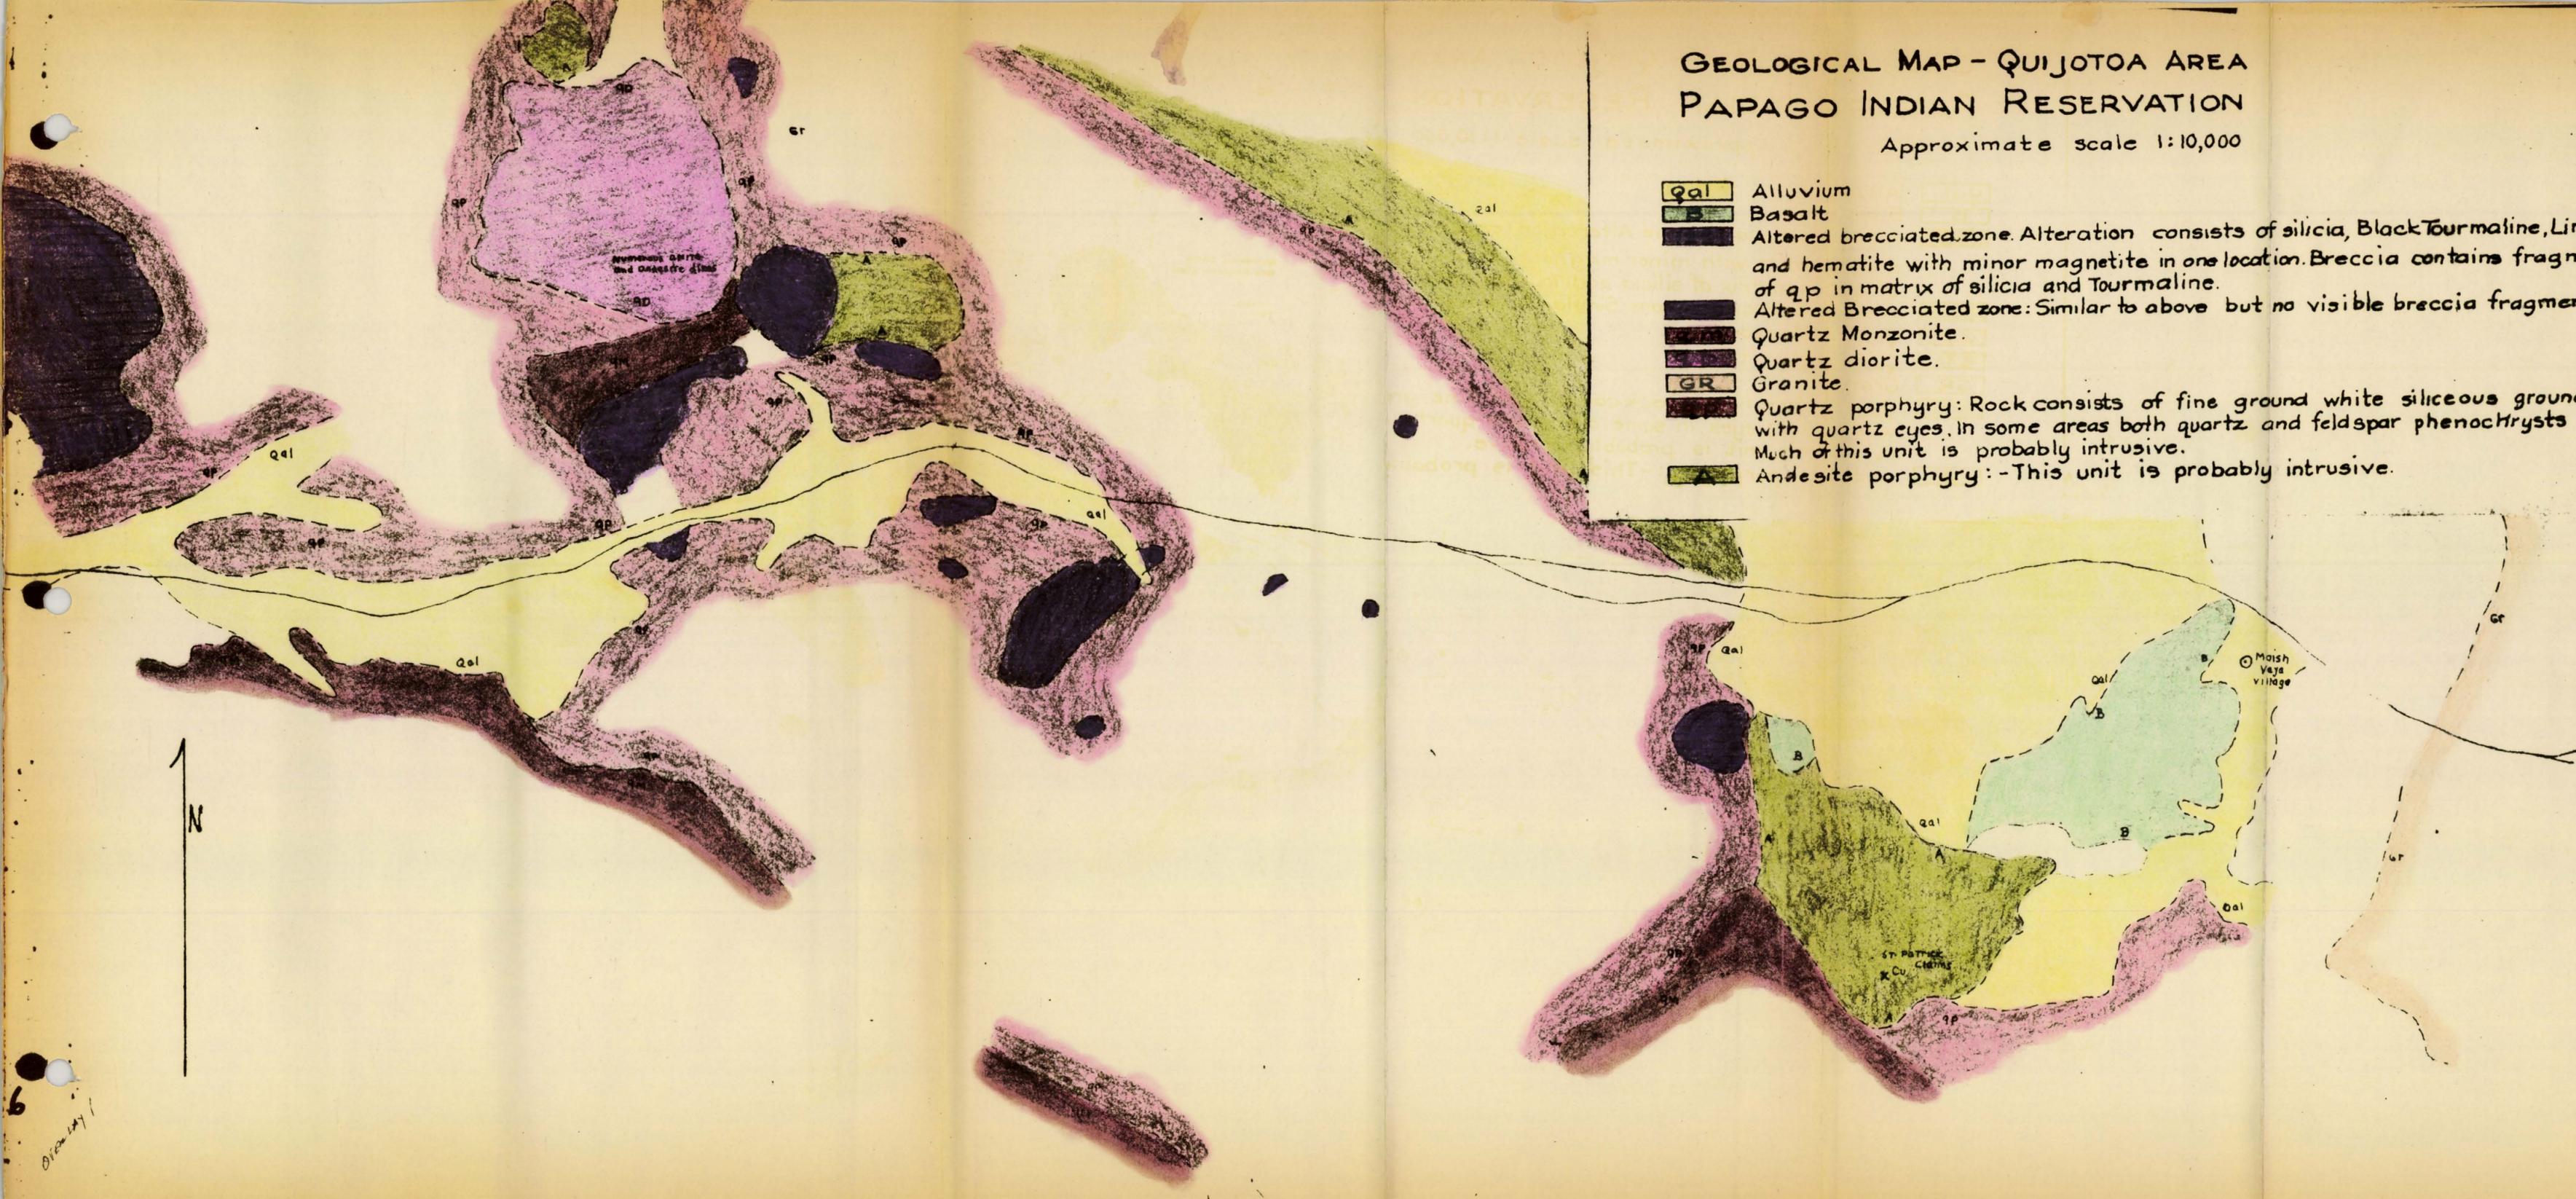

N

6
D. C. ...

STEBBINS MINERAL SURVEYS INCORPORATED

APPENDIX #1.

Induced Polarization Survey Data.

Interpretation by H. O. Seigel

REPORT ON INDUCED POLARIZATION SURVEYS
PAPAGO INDIAN RESERVATION, ARIZONA
ON BEHALF OF
STEBBINS MINERAL SURVEYS, INCORPORATED

INTRODUCTION

Over the period of June 10th - September 6th, 1963, a geophysical party under the direction of Mr. Robert Stemp, B.A.Sc., carried out induced polarization surveys in seven areas within the Papago Indian Reservation, Pinal County, Arizona. The areas are known by the following names: Anomaly # 17, Anomaly # 25, Sif Vaya, Lakeshore Mine, Vulture # 1 Area # 2, and Reward Mine Road.

The purpose of the present surveys was to map the distribution of metallic sulphide mineralization beneath the areas covered. In the present region these minerals may have a base metal association.

The reprint of the writer's recent paper entitled " Induced Polarization and its Role in Mineral Exploration", which is attached hereto, describes the phenomena involved and the methods of measurement and interpretation of this type of survey. For the present survey, high sensitivity Pulse or Transient type equipment was employed, with a current-on time of 1-1/2 seconds and a measuring time of 1/2 second.

The observed primary voltages are converted, by formula, to " resistivities", and are expressed in units of ohm metres. The secondary

(polarization) voltages are divided by the corresponding primary voltages to arrive at the "chargeability", the resulting polarization property characteristic of the region, and this is expressed in units of milliseconds, as explained in the accompanying paper.

Any transition in conduction from ionic to electronic, and vice-versa, will give rise to I. P. effects. For this reason all the metallic conducting sulphides, including pyrite, pyrrohtite, chalcopyrite and chalcocite, etc. and arsenides, will be detectible as well as graphite. The latter may be expected to occur primarily in carbonaceous shales and limestones, but not often in intrusive rocks. Occasionally abnormal I. P. effects may be experienced from magnetite concentrations and from serpentines. There is no way at present in which I. P. effects from any one of these sources may be differentiated from those arising from any of the others.

For the present survey, the equi-spaced three electrode array was employed with electrode spacings of 250', 500' and 1000'.

Geologic information has been provided by Mr. Q.G. Wishaw, of the Stebbins' staff on only the first mentioned area, namely Anomaly # 17.

DISCUSSION OF RESULTS

The results in each area will be discussed, in turn, below.

A) Anomaly # 17, Vekol Mountains Area

Ten lines at 1000' intervals were surveyed, oriented N 30° W, as well as two short intermediate lines. Electrode spacings of 250' and 500' were employed, with station intervals equal to the electrode spacing on the various lines. Both electrode spacings were employed on four lines.

Plate 1, on the scale of 1" = 500', presents the chargeability and resistivity results in profile form. The profile scales are 1" = 5 milliseconds for chargeability and 1" = 500 ohm metres for resistivity. The observed background chargeability range appears to be between 1 to 2 milliseconds. Values significantly above this range may be seen on a number of lines, with peaks of up to 11.0 milliseconds. Values of greater than 6 milliseconds are shown by shading on Plate 1 and peak locations are also shown.

Depth determinations have been made where two spacing profiles were carried out on anomalous areas and the interpreted results are as follows:

line 60 W, near 1750' N, depth of 250' - 300' to material of chargeability equivalent to an average of 3% - 6% metallic sulphides by volume.

line 40 W, near 500' N; 200' - 250' to material of 2% - 4% by volume equivalent average sulphides.

line 10 W, near 750' - 1500' N; up to 500' to material of as much as 10% sulphides by volume, equivalent.

line O, near 250' - 375' N; approximately 200' depth, to 3% to 5% sulphide equivalent.

Geological plans have been submitted, one on the scale of 1" = 830' covering the entire area, and a more detailed plan on the scale of 1" = 200' covering that portion east from line 20 W. A contour plan representing the results of a ground magnetometer survey of the latter area has also been submitted, together with the interpretation by R. W. Whipple, on the scale of 1" = 200'.

The various I. P. anomalous areas will be discussed, in turn, below.

- a) Line 60 W, near 1750' N; This lies under overburden in a region between Pinal Schist to the south and sediments and quartz porphyry to the north. It is not far from the Guadalupe Mine.

The anomalous area is still open to the west and north and would require additional geophysical surveying to determine its extent.

If it were necessary to investigate this indication by drilling based only on the present information the following hole would be recommended:

Collar on line 60 W at 1750' N, drill vertically for 400'.

- b) Line 40 W, near 500' N; This is an isolated, low order I. P. indication, whose chief merit is that it lies in an overburden covered area, with Pinal Schist to the south and quartz porphyry

to the north, about 400' east of a region marked " geochemical anomaly" on the geologic map.

No action is recommended on this indication at present, pending the results of drilling of some of the more prominent chargeability highs.

- c) Line 10 W, 750' N and 1500' N. These peaks lie directly on local magnetic ridges of the order of 300 - 400 gammas peak amplitude, in an overburden covered area. Whereas the 500' spacing anomaly amplitude is not large (7.8 milliseconds) the very low response on the short spacing suggests that the depth of cover may be as much as 500'. Short flanking lines 600' away on either side show considerably lower amplitudes. The depths deduced to the magnetic anomalous material are much shallower, namely 250' on the south zone and 90' on the north. A hole to explore this anomalous area would be as follows:

Collar on line 10 W at 750' N, drill vertically for 600'.

- d) Line O at 250' N; This is also directly on a magnetic ridge, of amplitude 300 gammas. In this case the magnetic depth is estimated at 40' and the I. P. depth at 200'. The I. P. anomaly peaks just south of an outcrop of quartzite containing some malachite stain.

A hole to explore this indication would be as follows:

Collar on line O at 300' N, drill vertically for 400'.

- e) Lines 10 E and 20 E; Three local chargeability highs occur on the

250' spacing results and all are in overburden covered areas near outcrops of limestone showing varying amounts of skarn alteration, magnetite and minor copper mineralization. All lie on or near regions of magnetic activity. A suitable exploratory hole would be as follows:

Collar on line 10E at 1875' N; drill vertically for 400'.

In summary, therefore, at least six areas of moderately abnormal polarization response have been indicated by the present I. P. survey in the Anomaly # 17 region. Where magnetic data is available there is good agreement in location between the I. P. and magnetic anomalies, whereas the magnetically interpreted depths are invariably less than those deduced from the I. P.

The I. P. results could be caused by a number of zones of disseminated sulphides, ranging from 2% - 10% by volume in average content, which have been oxidized down to the depths indicated. As copper or iron oxides, carbonates and silicates give no I. P. response they could be present in the oxidized zone. The observed magnetic anomalies, with which the I. P. indications often correlate, are likely due to magnetite of contact metamorphic origin. The intrusives which outcrop in the area e. g. at about 2900' N on line 20E, are only very very weakly magnetic.

The present I. P. lines are generally 1000' apart and therefore do not properly define the anomalous indications. In addition, the largest amplitude response, on line 60 W, is still open to the west and north, off

the survey area. If the exploratory drilling recommended above should develop any interest in this area, further fill in and extension I. P. lines would be desirable to guide additional drilling.

The location of the four recommended drill holes is shown on Plate 1.

B) Anomaly # 25 Area

Five lines, at approximately 2000' intervals, were traversed across this area, on a north-south strike. Electrode spacings of 500' were employed on three lines and 1000' on the two others. Station intervals were equal to the electrode spacings. The mean line length was approximately three miles.

Plate 2, on the scale of 1" = 1000', shows the results of these traverses, in profile form. The chargeability scale is 1" = 5 milliseconds, and the resistivity is 1" = 1000 ohm metres.

The observed chargeabilities are all less than 2.5 milliseconds, which can be considered to be in the low normal (i.e. non-electronic conducting) range.

The present geophysical results rule out the presence of at least the " porphyry copper" type of base metal deposit, in sulphide form, within at least a depth below surface equal to the electrode spacing employed.

C) Sif Vaya Area

Three lines, 2000' apart, were surveyed on a north-south orientation across this area. Electrode spacings and station intervals of 250' were




LEGEND

-  Main anomalous zone
-  Diamond drill test
-  Contour interval - 1.0 milliseconds

NOTE: This map is a two times enlargement from map supplied by Hunting Geophysical Services Inc. Some discrepancies in station locations appear to exist between the map and Induced Polarization Profiles.

HUNTING GEOPHYSICAL SERVICES, INC.
 QUIJOTOA MOUNTAINS BRECCIA ZONES
 INDUCED POLARIZATION SURVEY
 CONTOURS OF RESULTS
 OBTAINED FROM 500 FOOT ELECTRODE SPACING

Approximate Scale: 1 inch = 500 feet

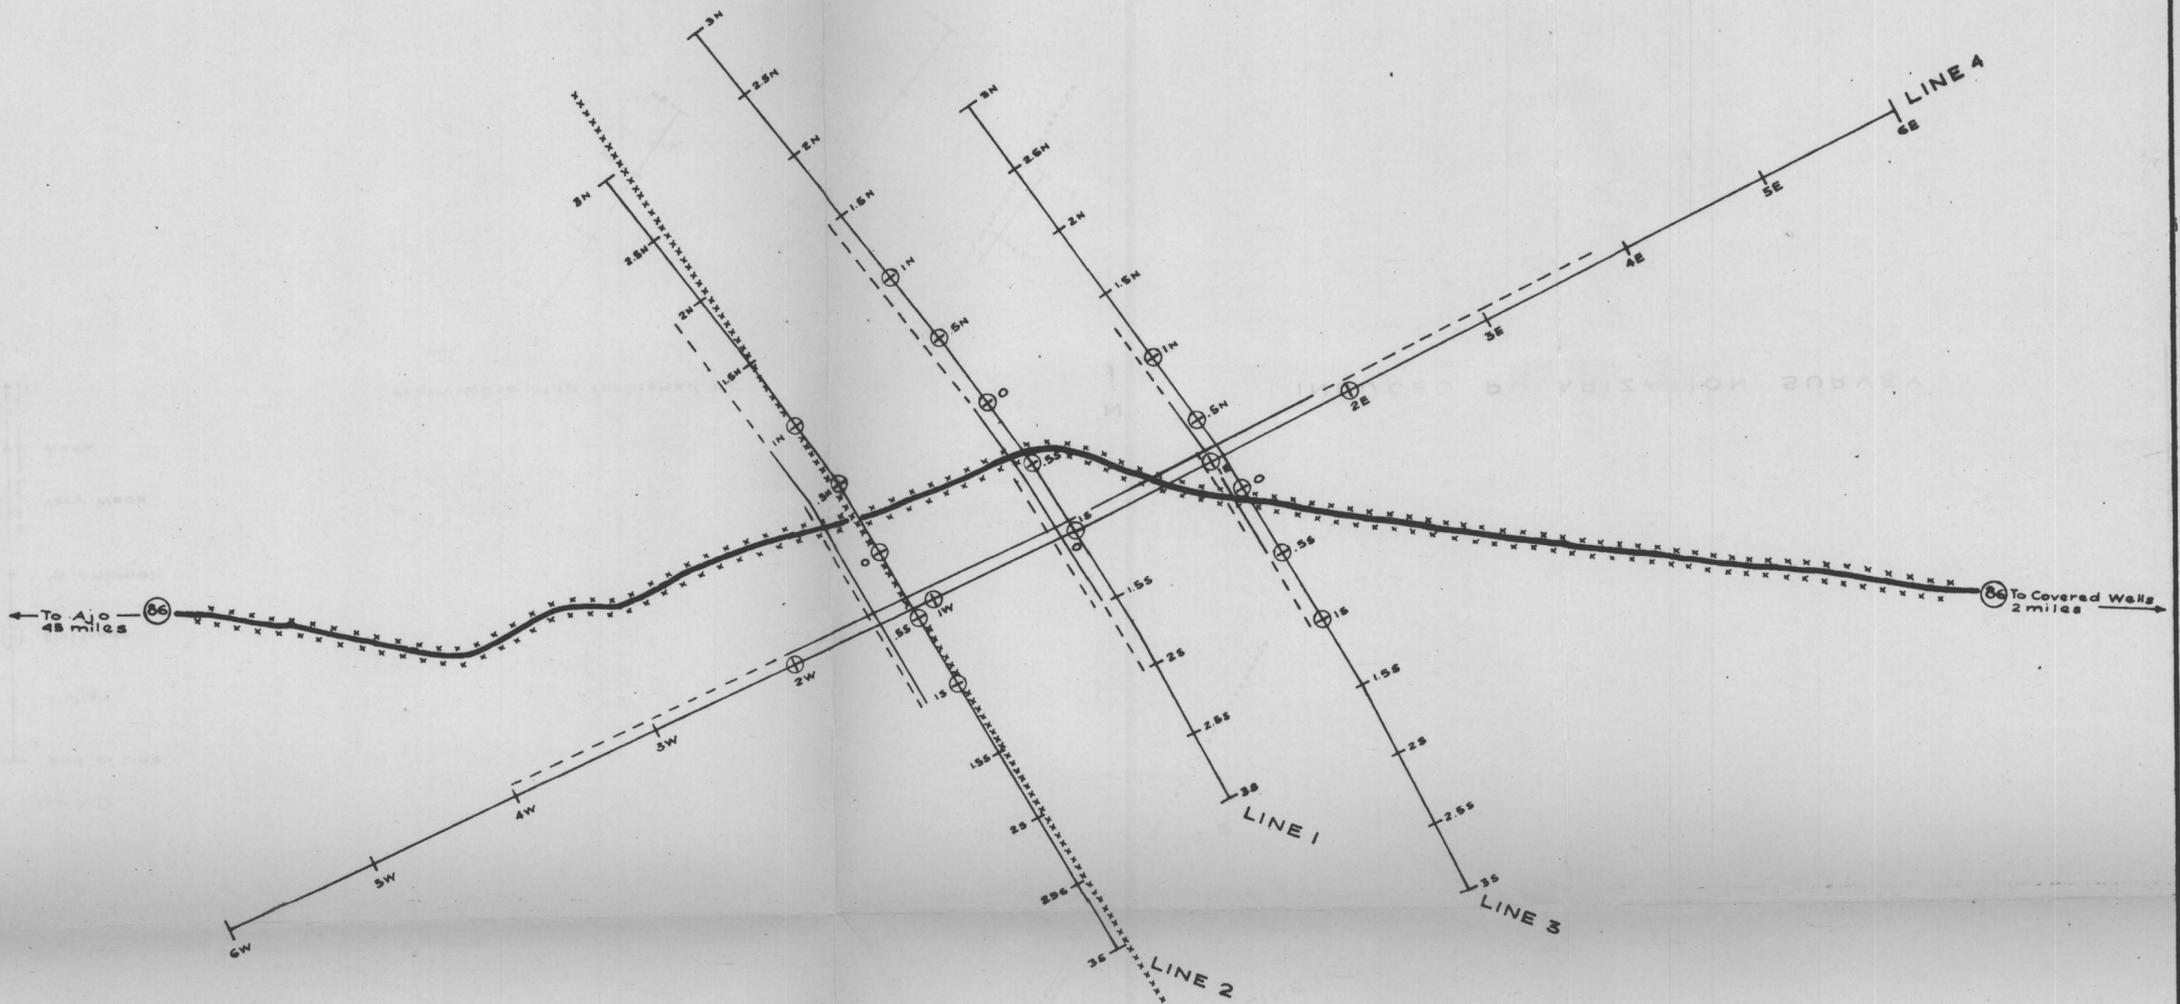

LEGEND

- End of Line
- Station
- ⊕ Electrode
- No Anomaly
- - - - - Very Weak
- - - - - Weak
- - - - - Moderate
- - - - - Strong

xxxxx Grounded wire fence

From Base Map furnished by
Hunting Geophysical Services, Inc.



INDUCED POLARIZATION SURVEY
QUIJOTOA MINING DISTRICT
 Papago Indian Reservation - Pima County, Arizona
 for
HUNTING GEOPHYSICAL SERVICES INC.

by
HEINRICHS GEOEXPLORATION CO.

Scale: 1" = 800'

Jan. 1963



APPENDIX # 2.

Induced Polarization Survey Data.

Hunting Survey Corporation

INTRODUCTION

From September 7 to November 20, 1962 an Induced Polarization (I.P.) survey was carried out by Hunting Survey Corporation Limited over part of the Papago Indian Reservation, Arizona for Hunting Geophysical Services, Inc. The area surveyed is located approximately 130 miles southwest of Tucson, Arizona.

The survey was performed by a five-man crew. The geophysicist in charge of the survey was J. Lloyd of Hunting Survey Corporation Limited. Hunting Geophysical Services, Inc. supplied the I.P. assistants required.

The geophysical survey was carried out along chained picket lines. The lines surveyed lie in a northwest direction and are designated by numbers 1, 2, 3, 4, 5 and 6. In addition a cross line designated by the letter A was surveyed. This grid system provided a total of 44,250 feet or approximately 8.4 miles of profiles. The basic coverage of the survey consisted of readings at 500-foot intervals with additional readings being taken at 250-foot intervals wherever necessary.

The data was obtained with the "three-electrode array" configuration. This array consists of one current electrode (C_1), two potential electrodes (P_1 and P_2), the second current electrode (C_2) remaining fixed at "infinity". With this configuration C_1 , P_1 and P_2 are moved in unison in 500-foot jumps. The values were plotted against the mid-point of C_1 - P_1 . Two electrode spacings, 250 feet and 500 feet, were used to

survey the lines.

The Hunting pulse-type instrument is similar in design and operation to those described by R. W. Baldwin in "A Decade of Development in Overvoltage Survey", A.I.M.E. Transactions, Vol. 214, 1959. Power is obtained from a Briggs and Stratton motor coupled to a 900 cycle generator which provides a maximum of 2,000 watts d. c. to the ground. The cycling rate is 1.5 seconds current on and 0.5 seconds current off, the pulses reversing continuously in polarity. The data collected in the field consists of careful measurement of the current (I) in amperes flowing through electrodes C_1 and C_2 , the primary voltage (V_p) in volts appearing between P_1 and P_2 during the "current on" part of the cycle, and the secondary voltage or overvoltage appearing between electrodes P_1 and P_2 during the "current off" part of the cycle. The latter voltage is integrated electronically with respect to time, to provide a measurement of polarization (V_s) in millivolt-seconds. The "apparent chargeability" in milliseconds is calculated by dividing the polarization (V_s) by the primary voltage (V_p). The "apparent resistivity" in ohm-meters is proportional to the primary voltage (V_p) divided by the measured current (I), the proportionality factor depending on the geometry of the array used. The resistivity and chargeability obtained are called "apparent" as they are the values which that portion of the earth sampled by the array must have if it were homogeneous. As the earth sampled is usually inhomogeneous the calculated "apparent resistivity" and "apparent

chargeability" are functions of the "true" resistivities and chargeabilities of the various sections of the earth sampled and of the geometry of those sections.

The results of the survey are shown on the individual profiles in the Appendix of this report. These profiles have a horizontal scale of 1 inch to 250 feet. The "apparent chargeability" is plotted at a vertical scale of 2.0 milliseconds per inch. The "apparent resistivity" is plotted on a vertical logarithmic scale of 2 miles per logarithmic cycle. A map at a scale of 1 inch to 500 feet showing contours of chargeability at the 500-foot electrode spacing is located in the pocket at the rear of this report. The map is an enlargement of the 1 inch to 1,000 feet geological map provided by Hunting Geophysical Services, Inc. Some discrepancies in station location appear to exist between the map and the I.P. profiles. It has been necessary, therefore, to locate the profiles on the map by means of the highway. Each profile has the highway marked on it so that cross reference between the map and the profiles can be made.

INTERPRETATION

The technique used in the interpretation is based on the assumption of a layered earth. The complex problem of the combined effects of depth of burial, width, dip and true chargeability of a vertically mineralized zone plus the physical characteristics of the overburden and country rock have not been solved practically. However, certain rule-of-thumb plus the experience gained from test surveys over known ore bodies permit certain estimates to be made. Thus the maximum possible width of the causative bodies are indicated on the accompanying profiles, with the understanding that the body most probably is narrower than indicated. Rough depth estimates are possible in some cases, but it is necessary to know the electrode spacings at which maximum response is obtained; thus a minimum of three electrode spacings across the anomaly are usually required.

The interpretation of the survey data consists of a careful analysis of each individual profile. The results of this analysis are shown by appropriate symbols on the I.P. profiles in the Appendix of this report. These results are also transferred to the interpretation map in the pocket at the end of this report using the same symbols. Due to the high degree of complexity of the interpreted I.P. results and to the absence of geological data in certain parts of the area, caused by the presence of overburden, no attempt was made to outline in plan

form the various zones by use of contact or similar symbols. Instead, possible relationships between zones of different lines are shown by long arrows.

The symbols used warrant some further discussion. The "zones of special interest" (cross-hatched) represent the causative bodies of specifically recognizable anomalies measured from profiles observed with the shortest electrode spacings. Thus, the width indicated is the probable width nearest to the bedrock surface and need not represent the true width of the body at depth. The "zones of possible interest" (single-hatched) are anomalous zones which cannot be broken down into individual bodies, or zones which show lower chargeability (less mineralization) or greater depth. Special features of the I.P. data are indicated by arrows between limiting marks along the profile and are explained by notes, both on the profiles and on the map.

Estimated depth (h), or the limits thereof, are shown in feet. Where a maximum value of depth is shown, it is believed that more often than not the actual depth will be found to be one-half, or less, of the maximum shown. It is to be noted that these depths would be more properly called distances to the body, the distances being measured in a plane perpendicular to the line and to the ground surface. This is due to the fact that the I.P. method samples a certain volume of the earth and therefore the causative bodies do not necessarily lie beneath the lines surveyed but could be located to one or the other side of the line.

Such an occurrence is called a "side effect".

As previously explained, the mathematical problem of the relationship between the width, the depth and the true chargeability is not solved in the case of bodies of limited vertical cross sections. Thus, only a minimum chargeability in milliseconds is shown. Past experience shows that one percent sulphide by volume will cause a chargeability of 3 to 8 milliseconds. In other words, a minimum chargeability of 12 milliseconds indicates an absolute minimum sulphide content of 1.5%, but the sulphide content could also be greater than 4%. The sulphides may or may not be economical as the I.P. method does not differentiate between chalcopyrite and pyrite, for example.

The resistivity measurement remained fairly constant, throughout the area, at 180 to 300 ohm-meters. The weak variations observed are mainly due to changes in overburden properties and in its thickness and are not considered significant in the present problem.

The interpretation of the I.P. data based on all available data is presented in the following paragraphs.

The chargeability measurements indicate a fairly large anomalous zone lying approximately in an east-west direction. A normal background value of chargeability of 2 milliseconds is observed on all sides of the anomalous zone. Over the zone the chargeability reaches a maximum of 11.8 milliseconds on Line 5. The results obtained with the two electrode spacings show similar chargeabilities at each station indicating that the

causative body extends to depth.

Lines 1 and 2 indicated a fairly well defined anomaly extending from 0+00 to 3+75S giving a width of 2,375 feet. However there is a possibility that this anomaly consists of two zones. Calculations carried out indicate the true chargeability of the anomaly may be as high as 9.0 milliseconds and that the causative body is at a depth of approximately 100 feet.

The results obtained over Line 3 indicate only one anomalous zone extending from 5+00S to 17+50S. Calculations indicate the true chargeability for this portion of the anomaly to be a minimum of 7.5 milliseconds. The depth to the causative body is approximately 125 feet.

Line 4 indicates a widening of the anomalous zone. As Line 4 lies 500 feet to the east of Lines 1 and 2, this widening indicates that the two zones indicated on Lines 1 and 2 have apparently merged into one zone. The calculated true chargeability of this zone is 7.4 milliseconds and the depth of the body is less than 100 feet.

A fairly strong anomaly was located on Line 5 centered at 10+00S. To the north of this zone the chargeability remained fairly high indicating a probable change in the country rock. It is, however, possible that the mineralized zone swings to the north and is the cause of the high chargeability reading found on the north end of this line.

The results obtained along Line 6 indicated a fairly extensive zone extending from 27+50S to 5+00N. However this anomaly may be

found to consist of two zones. The true chargeability is found to be 8.0 milliseconds and the depth of the causative body is approximately 100 feet.

Line 'A', the cross line, indicates two main anomalous zones showing that the anomaly located by the north-south line is approximately 3,000 feet long. The high readings located between 12+50E and 20+00E are in all probability due to side effects from the anomalous zone as it extends eastward beyond the survey area of Line 'A'.

A magnetometer survey carried out over the same lines as was the I.P. survey indicated no magnetic anomaly. It is, therefore, thought that any magnetite present must be in small amounts and not sufficient to cause the I.P. anomaly.

Geologically the anomaly appears to be suitably located within the quartz porphyry. Zones of alteration and discolouration are to be found surrounding the anomalous zone. The breccia pipes do not appear to be the cause of the anomaly as many are located outside of it.

In general then, this large anomalous area, which is still open at both ends, appears to be suitably located and the chargeabilities indicate that the anomaly could be caused by a body containing 1% to 3% sulphides by volume. An expanding Wenner electrode configuration indicated the depth to the body to be approximately 50 feet. Other depths calculated from the I.P. profiles range from 50 to 150 feet. The accompanying profiles and interpretation map shows possible trend patterns based on information available. Although the trends may be considered to be

fairly well established, their lateral extent and position is still open to question due to the possibility of side effects. Thus, it must be remembered that the bodies indicated may or may not reach a specific line, and may become more or less significant in between lines.

SUMMARY AND RECOMMENDATIONS

An Induced Polarization survey was carried out over a small area in the Quijotoa Area of the Papago Indian Reservation, Arizona. A large anomalous zone was indicated, probably due to the presence of sulphides. This anomaly is approximately 2,000 feet wide and although it has been traced for a length of 3,000 feet, it is still open to the east and west. A number of calculations were carried out on each profile and the true chargeability of the zone varies from 6.6 milliseconds to 14 milliseconds. The depth to the causative body varies from 45 feet to 150 feet. The amount of sulphide mineralization present to cause an anomaly of this type varies from 1% to 3% by volume.

A magnetometer survey carried out over the same lines as the I.P. survey indicate no magnetic anomaly, and therefore there is no reason to suspect that magnetite is the cause of the I.P. response.

The anomaly is located within the quartz porphyry and is surrounded by areas of discolouration or alteration. It is, therefore, believed that the zone is suitably located and should be further investigated.

Insufficient I.P. work was carried out to completely outline the anomalous zone. It is recommended that further I.P. work be carried out to completely outline the causative body and to further investigate the high chargeability readings located on the north end of Line 5.

It is further recommended that the anomaly located to date be investigated by diamond drilling, as the economic significance of the zone must be determined by visual examination, the I.P. method cannot differentiate between economic and non-economic sulphide minerals. The following locations are recommended for diamond drill holes:

Lines 1 and 2 - vertical hole at 17+50N

Line 4 - vertical hole at 10+00S

In drilling, it must be remembered that due to the wide intervals (500 feet) between lines, it is possible that the causative body does not reach the particular line on which the anomaly is observed.

Should the results of the drilling prove encouraging then, of course, further work should be undertaken to completely outline the anomalous zone.

HUNTING SURVEY CORPORATION LIMITED


E. B. Nicholls,
Geophysicist.

APPENDIX

I. P. PROFILES : Lines - 1 & 2

3
4
5
6
"A"


3 - ELECTRODE ARRAY




INTERPRETATION LEGEND

 -- Area of special interest

 ----- Area of interest

 -- Area of possible interest

$\frac{\Omega'}{2\pi}$

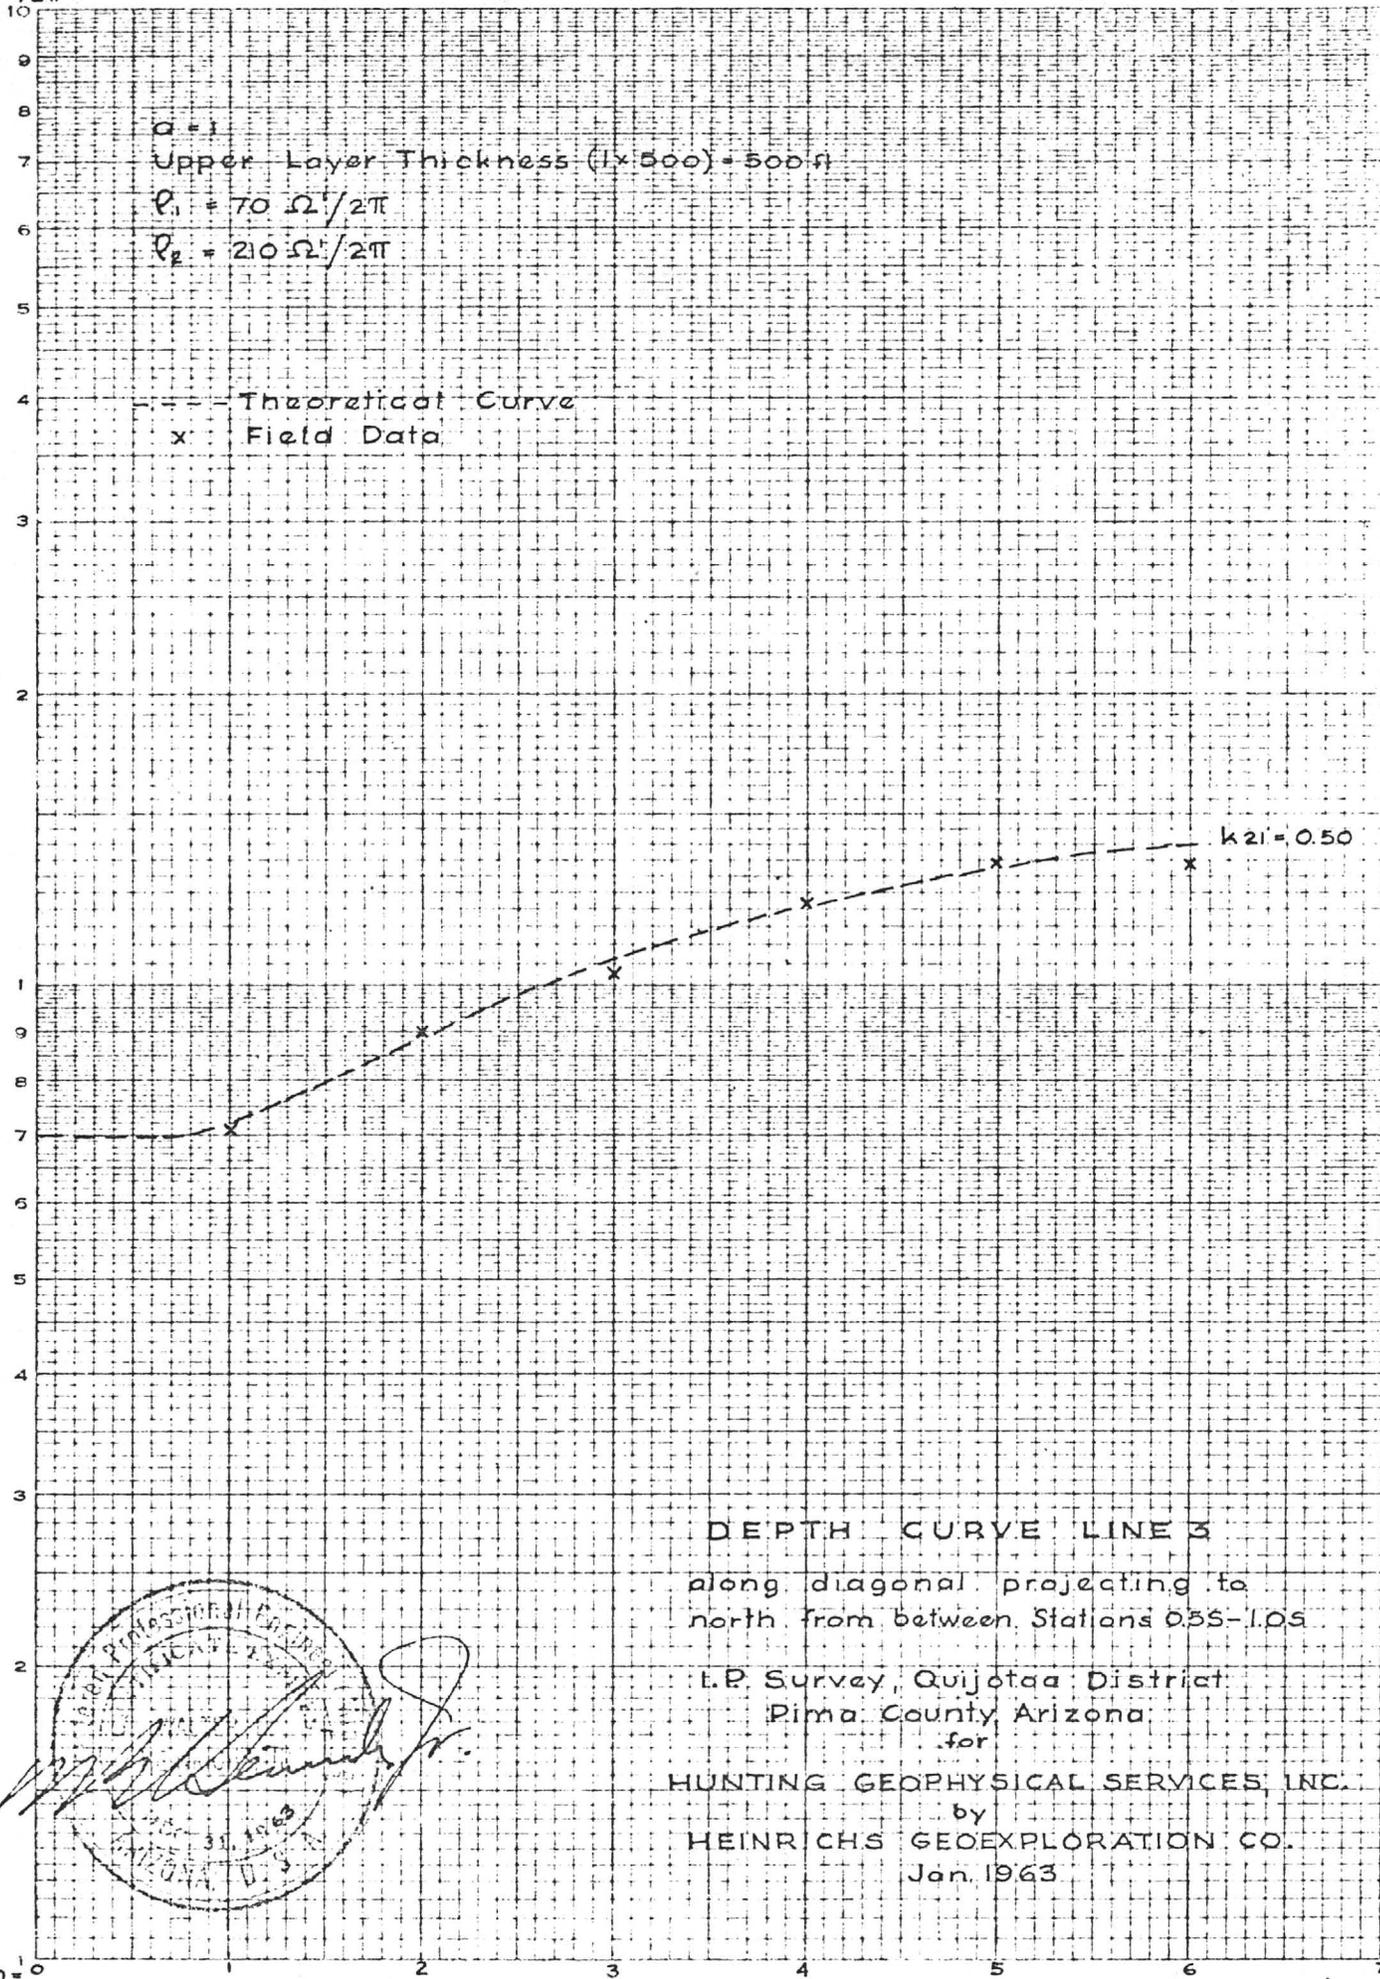

DEPTH CURVE LINE 3

along diagonal projecting to north from between Stations 035-105

L.P. Survey, Quijotaa District
Pima County, Arizona

for
HUNTING GEOPHYSICAL SERVICES, INC.
by
HEINRICHS GEOEXPLORATION CO.
Jan 1963

APPENDIX # 3.

Induced Polarization Survey Data,

Heinrichs Geosexploration.

INTRODUCTION

From January 18 through January 25, 1963 Heinrichs Geoexploration Co. conducted induced polarization surveys over part of the Quijotoa Mining District, Papago Indian Reservation near Covered Wells, Arizona. This work was performed at the request of Mr. Quentin G. Whishaw of Hunting Geophysical Services, Inc., under the supervision of Mr. Franklin A. Seward, Jr., geophysicist, with E. Grover Heinrichs, Chris Ludwig and Floyd Hanly assisting.

The twofold purpose of this work was to first test an I. P. anomaly mapped by Hunting Geophysical Services and second to provide a direct comparison of the Hunting data which was obtained by the time domain or pulse method and the data of this report which utilized the multiple frequency technique.

Included with this report are sectional data sheets for each of the four lines surveyed and a plan location map, a depth curve profile on Line 3 and self potential profiles.

CONCLUSIONS AND RECOMMENDATIONS

1. The anomalism observed is definite, but considered to be of only moderate absolute magnitude. It is interpreted to be due to sulfide mineralization and compares with rather surprising similarity to the previous pulse results.
2. Data on Lines 1, 3 and 4 indicate definite attenuation of sulfide involvement at depth.
3. Data on Line 2 is suspect at least in part due to proximity of Line and electrodes to parallel fence.
4. Line 4 repeated with two end on spreads of 500 ft. dipoles would probably give much more definite east-west boundary interpretation.
5. Lateral resolution is best on Line 3 and least on Line 4
6. Lateral resistivity inhomogeneities preclude discrete depth analyses. One depth curve analysis on Line 3 indicates a thickness of the upper layer of 500 ft.

PROCEDURES

Lines 1, 2 and 3 were run along Hunting Geophysical Lines 2, 5 and 6 respectively, centered as indicated on the plan map, using a 500 ft. dipole spacing. Line 4 was run along Hunting Line 7 centered as indicated at 1.0 south on Line 1 and using a 1,000 ft. dipole spacing.

Observations were made from the expanding dipole-dipole or Eltran electrode configuration which has become standard in the industry for those using the frequency domain technique.

A D.C. frequency of .05 cps was used throughout the survey except when receiving the 5th and 6th separation data on Lines 2 and 3 and 3rd through 6th separation data on Line 4 where high telluric noise-to-signal ratio was minimized by using .15 cps. The A.C. frequency used was 3.0 cps.

INTERPRETATION

The interpretation is presented on the sectional data sheets and the plan maps as blank, dashed, single bar, single bar and dashed and double bar lines indicating the relative degree of anomalous observed and respectively, the terms very weak, weak, moderate and strong are used to indicate the strength. It should be emphasized that these terms are used in a relative sense only and may be only indirectly related to absolute degree of anomalous or intensity of mineralization.

The anomaly on each of the four lines correlates well with that mapped by Huntling. The highest absolute anomalous (with respect to the percent frequency effects) appears to exist on Line 2. On the other hand much if not all of these data are subject to question regarding degree of sulfide involvement because of the close proximity of this line and the current electrodes to a

parallel grounded wire fence. In fact it is almost certain that the data on the 2.5n to 3n dipole was strongly affected by the fence and it was not reasonable from the observations made to compute frequency effects or metal factors on the last three data points.


Line 1 shows a distinct anomaly from 1.0n to 2.0s with the strongest effects from 0.5s to 1.5s. The best pattern is observed on Line 3 which offers the highest degree of resolution although not necessarily the highest magnitude effects.

The 1,000 ft. dipole, Line 4 offers the least lateral resolution and the lowest magnitude anomalous data.

On all of the lines, with the possible exception of Line 2 (of the questionable data), the anomaly appears to attenuate with depth, indicating that perhaps the mineralized zone is a relatively horizontal layer.


A number of depth analyses were attempted on each of the lines, but in general lateral resistivity changes prevented any successful interpretation. One depth curve on Line 3, taken along the diagonal projecting to the north from between stations 0.5s to 1.0s, gives a depth to the top of the second layer of 500 ft, a resistivity of 70 ohm ft./ 2π for the top layer and a resistivity of 210 ohm ft./ 2π for the bottom layer.

Respectfully submitted,
HEINRICHS GEOEXPLORATION CO.



Franklin A. Seward, Jr., Geophysicist
HEINRICHS GEOEXPLORATION COMPANY

January 30, 1963
P. O. Box 5671
Tucson, Arizona

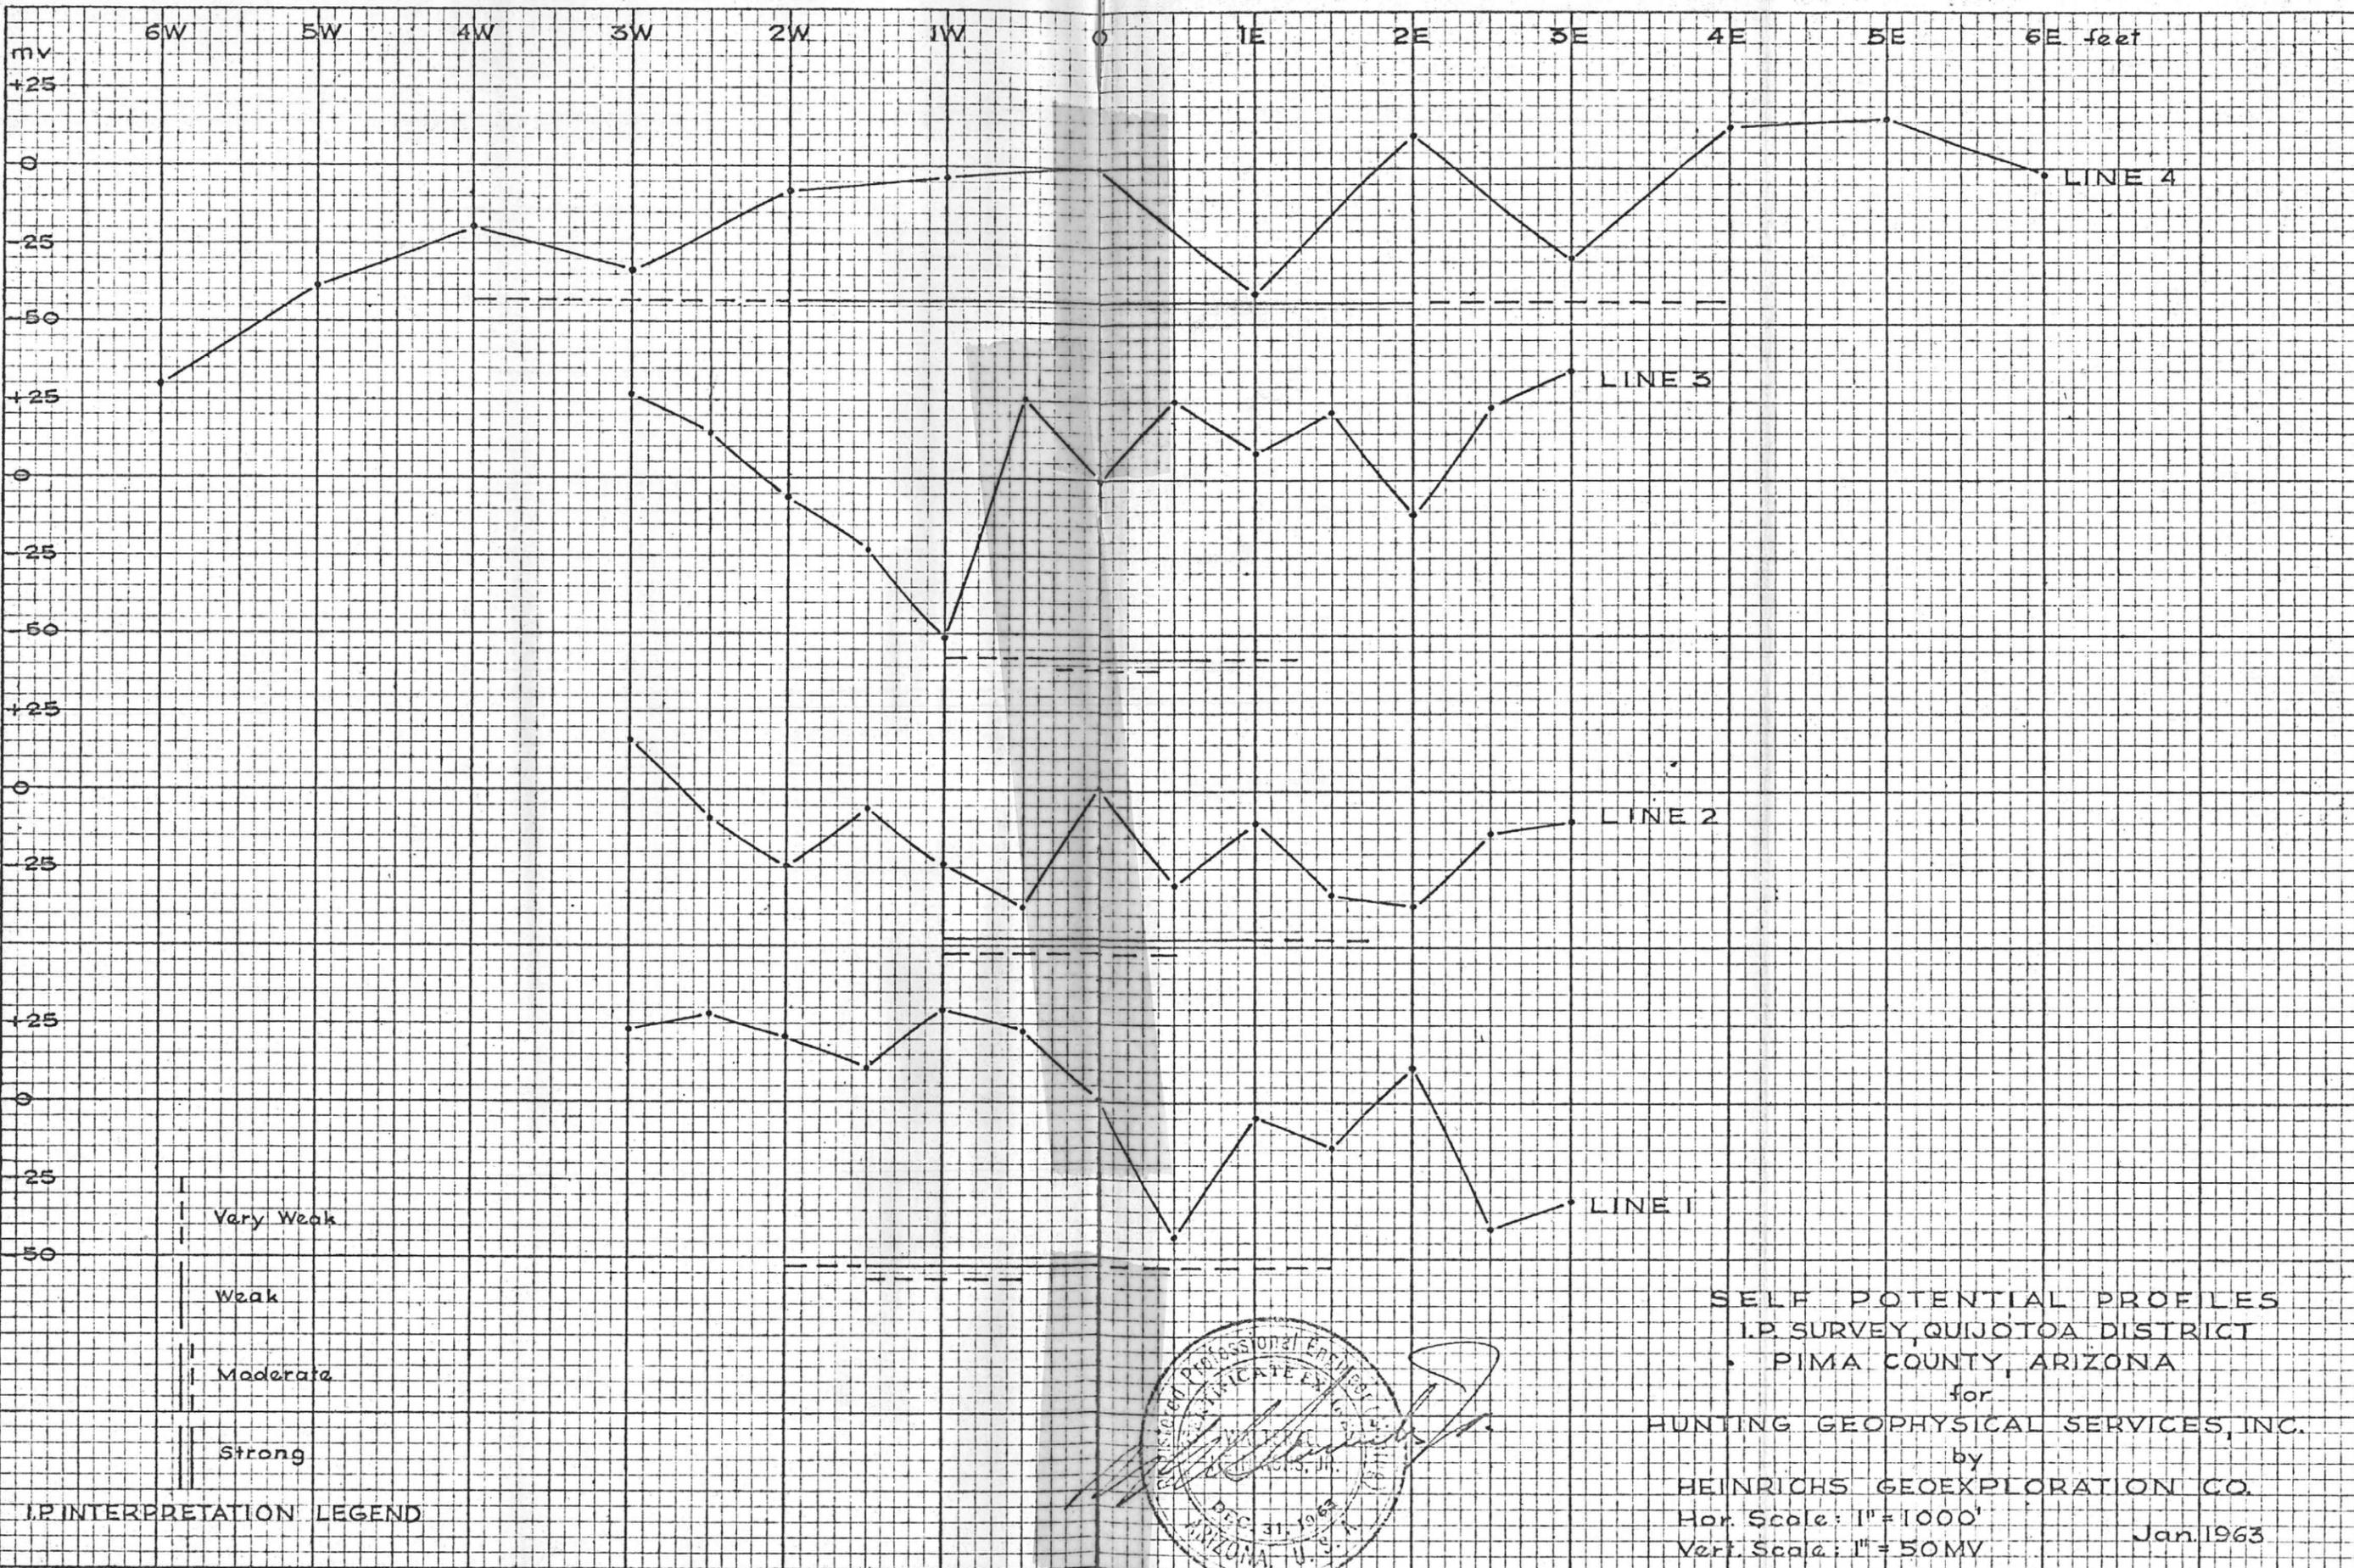

KE 10 X 10 TO THE INCH
 KEUFFEL & ESSER CO.
 359-5DLG
 MADE IN U.S.A.

| | | | |
 Very Weak
 | | | | |
 Weak
 | | | | |
 Moderate
 | | | | |
 Strong


I.P. INTERPRETATION LEGEND



SELF POTENTIAL PROFILES
 I.P. SURVEY, QUIJOTOA DISTRICT
 PIMA COUNTY, ARIZONA
 for
 HUNTING GEOPHYSICAL SERVICES, INC.
 by
 HEINRICHS GEOEXPLORATION CO.
 Hor. Scale: 1" = 1000'
 Vert. Scale: 1" = 50 MV
 Jan. 1963

Separation or Depth Point

Apparent Resistivity
(Ohm feet)
Superscript numbers
indicate Percent Frequency Effect

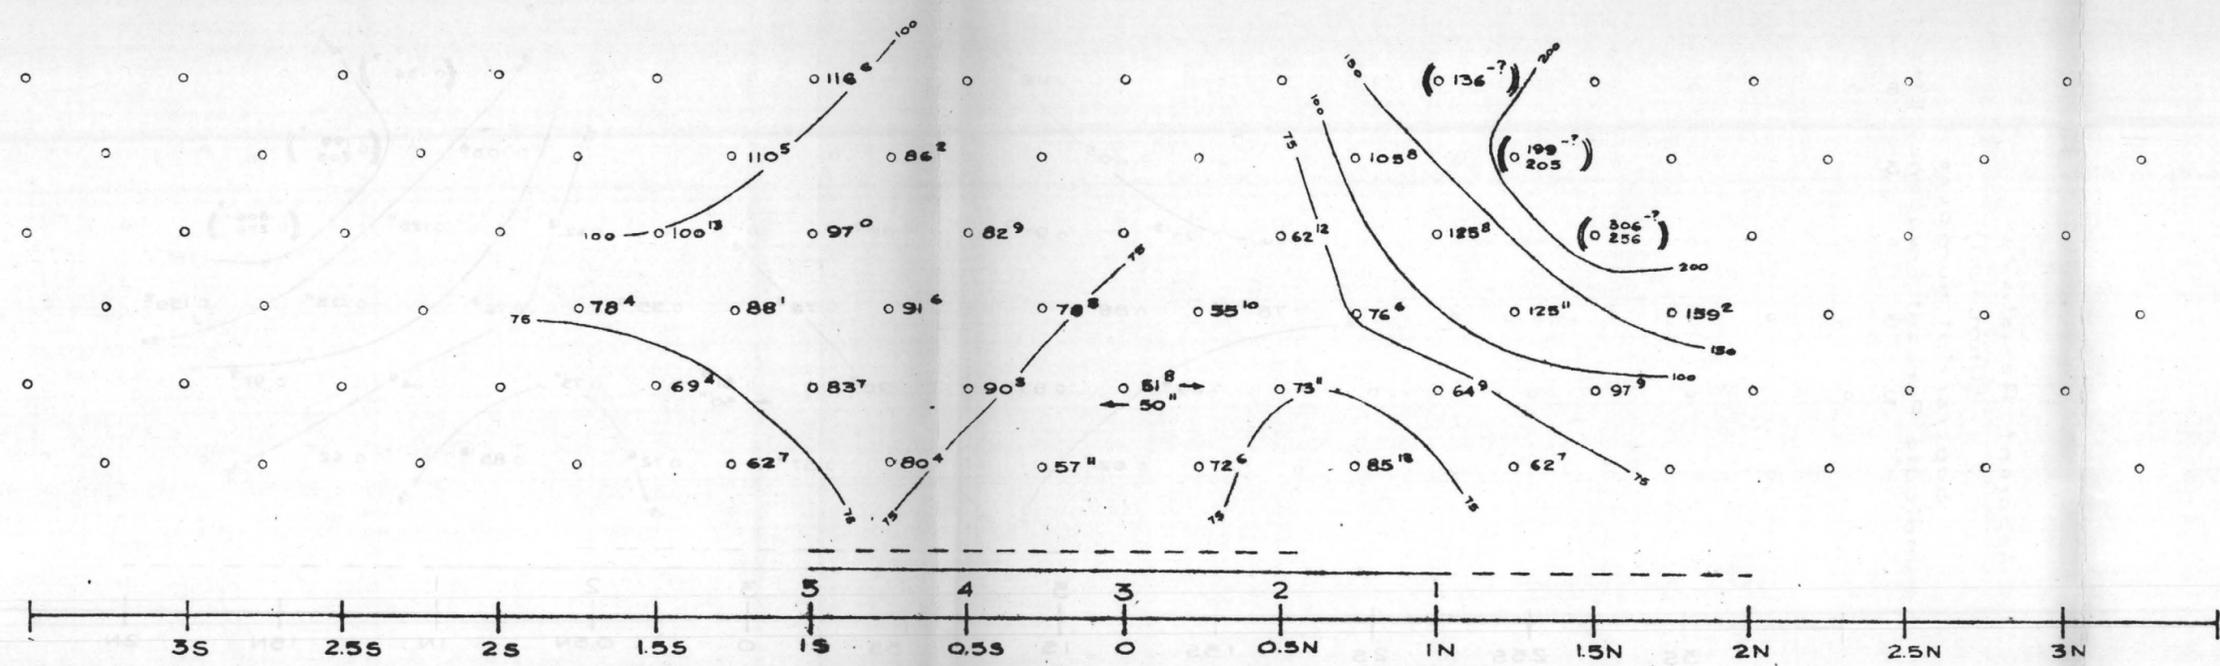


LEGEND

- Electrode &/or Pot Location & End of Line
- Station
- No Anomaly
- Very Weak
- Weak
- Moderate
- Strong

$\frac{\rho_{DC}}{2\pi}$

Contour interval: Logarithmic
() indicates questionable data

Metallic Conduction Factor
(Apparent)

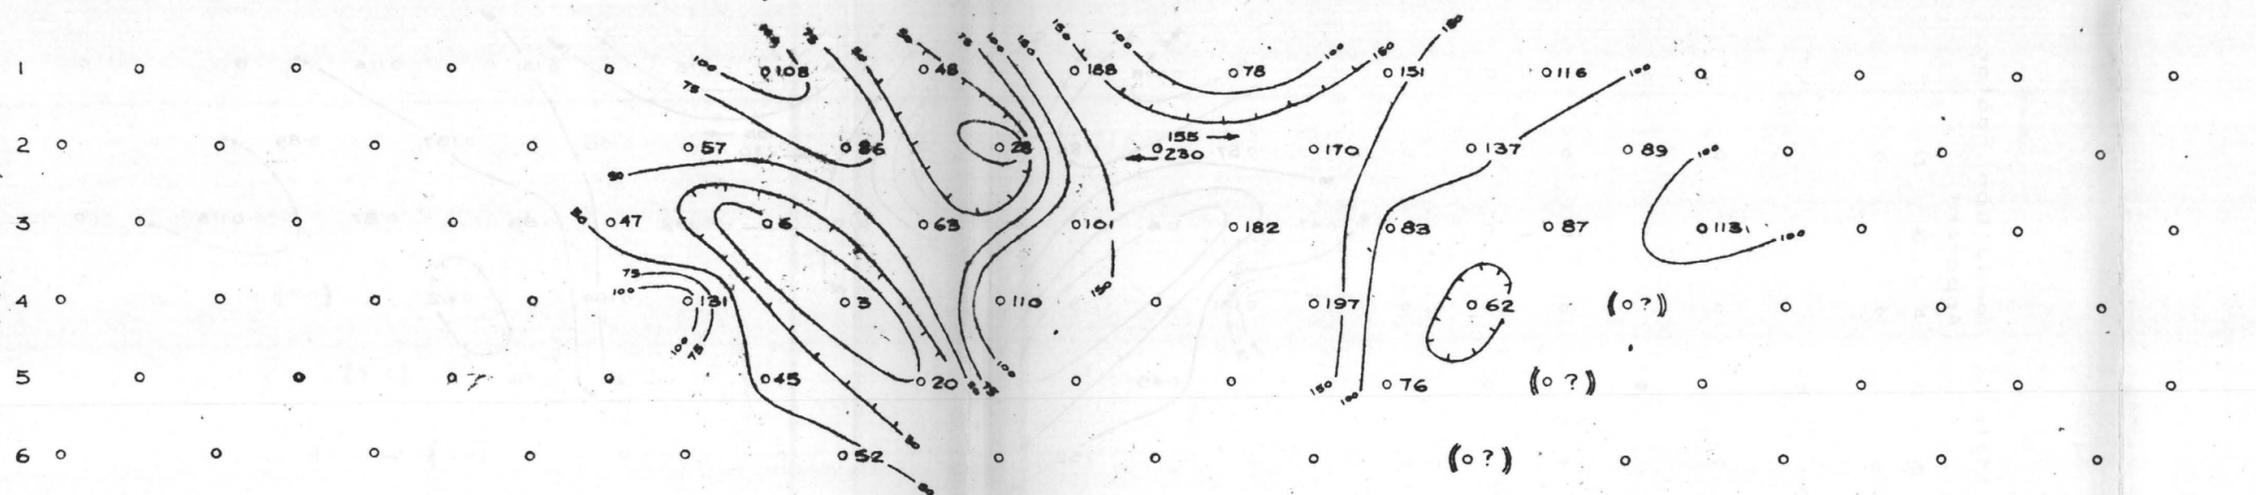

M.C.F.

QUIJTOA DISTRICT
PIMA COUNTY, ARIZONA

SECTIONAL DATA SHEET
for
HUNTING GEOPHYSICAL SERVICES INC.

LINE No. 2


INDUCED POLARIZATION SURVEY
HEINRICH'S GEOEXPLORATION CO.

Scale: 1" = 500'
Date: Jan. 1963




Separation or Depth Point

Apparent Resistivity
(Ohm feet)
Superscript numbers
Indicate Percent Frequency Effect

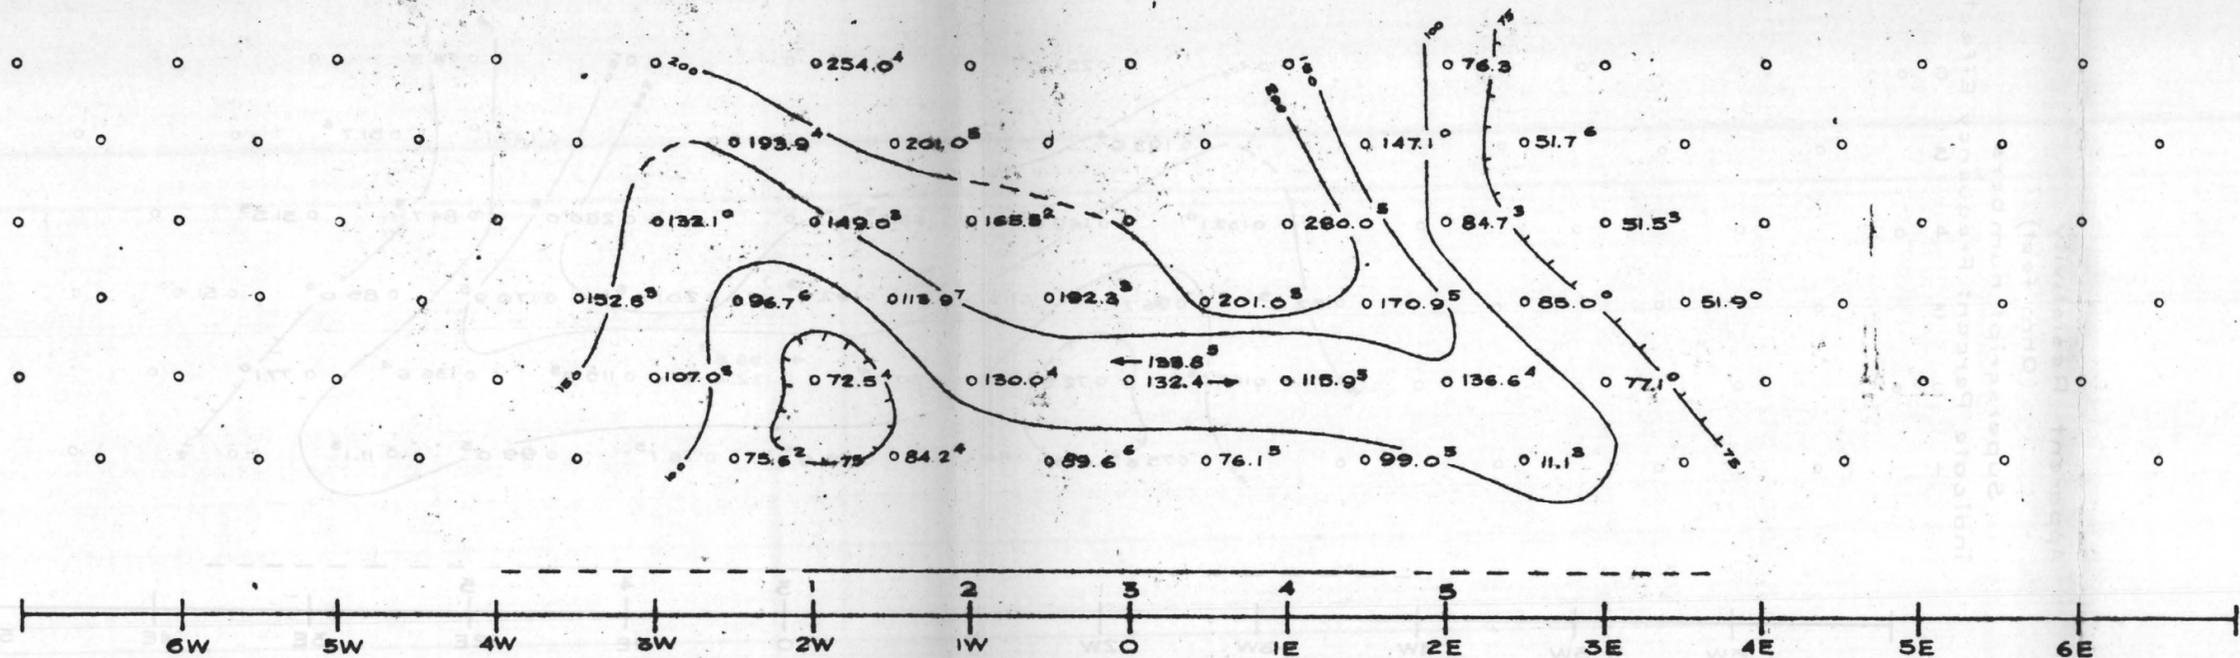

Metallic Conduction Factor
(Apparent)

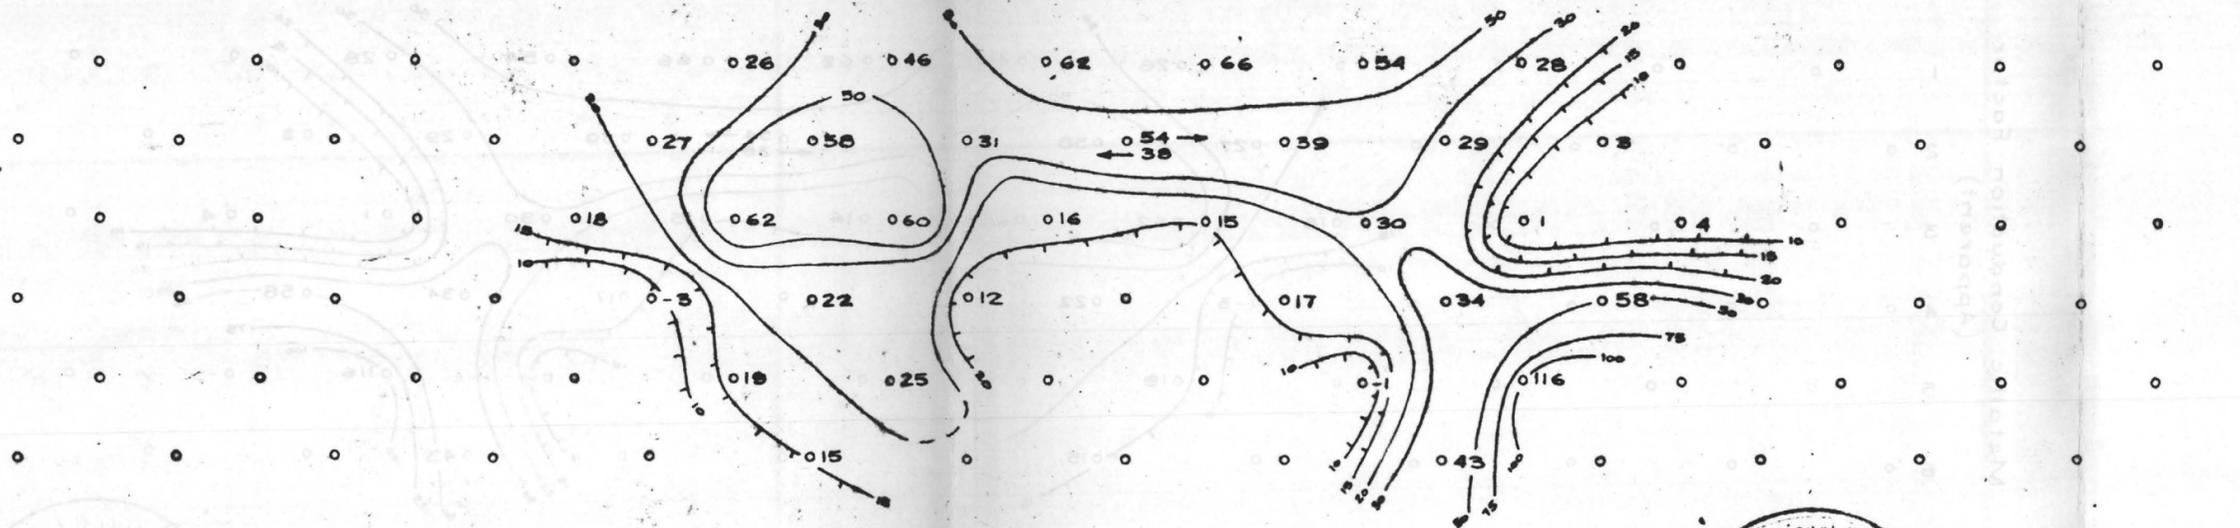

LEGEND

- Electrode #/or Pot. Location
End of Line
- Station
- No Anomaly
- Very Weak
- Weak
- Moderate
- Strong

$\rho_{oc}/2\pi$

Contour interval: Logarithmic
() indicates questionable data



M.C.F.
QUIJTOA DISTRICT
PIMA COUNTY, ARIZONA
SECTIONAL DATA SHEET
for
HUNTING GEOPHYSICAL SERVICES INC.

LINE No. 4


INDUCED POLARIZATION SURVEY
HEINRICHS GEOEXPLORATION CO.
Scale: 1" = 1000'
Date: Jan. 1963



Separation or Depth Point

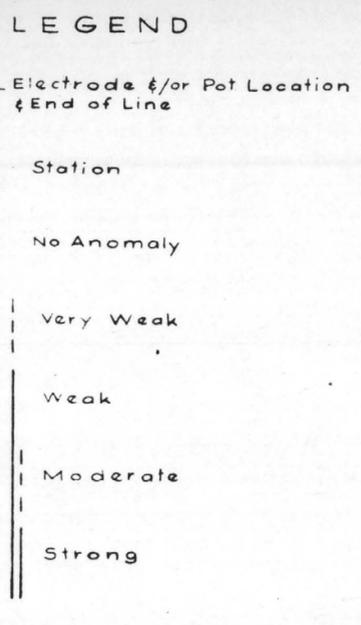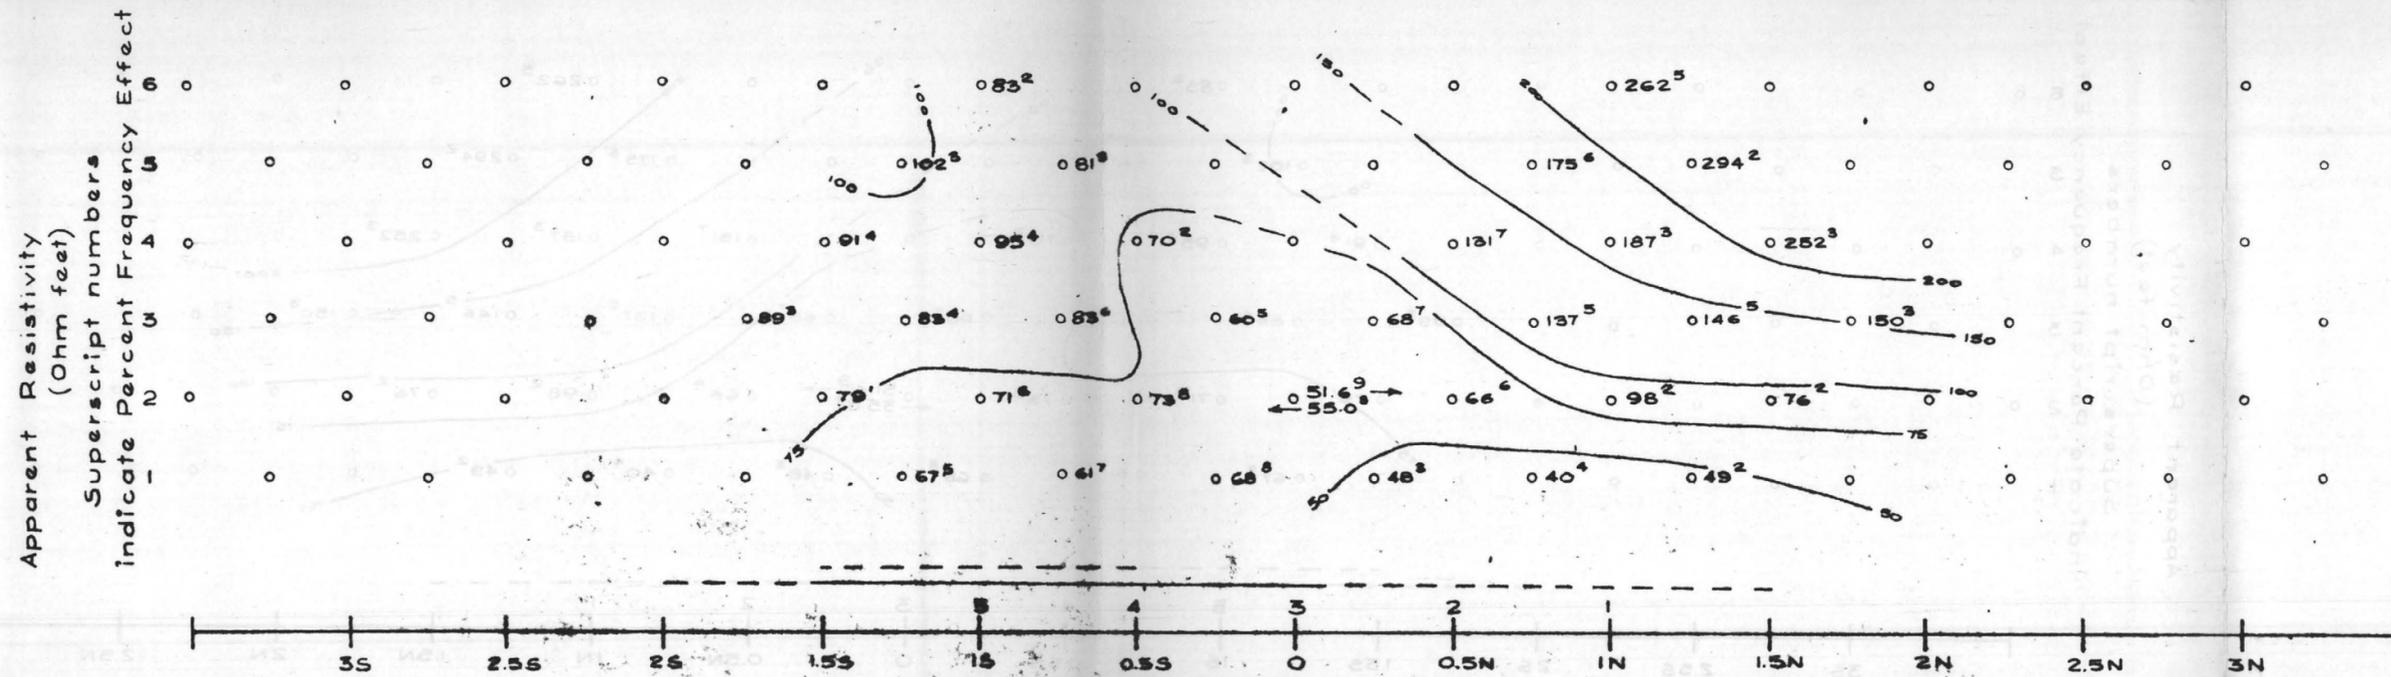

Contour interval: Logarithmic
() indicates questionable data

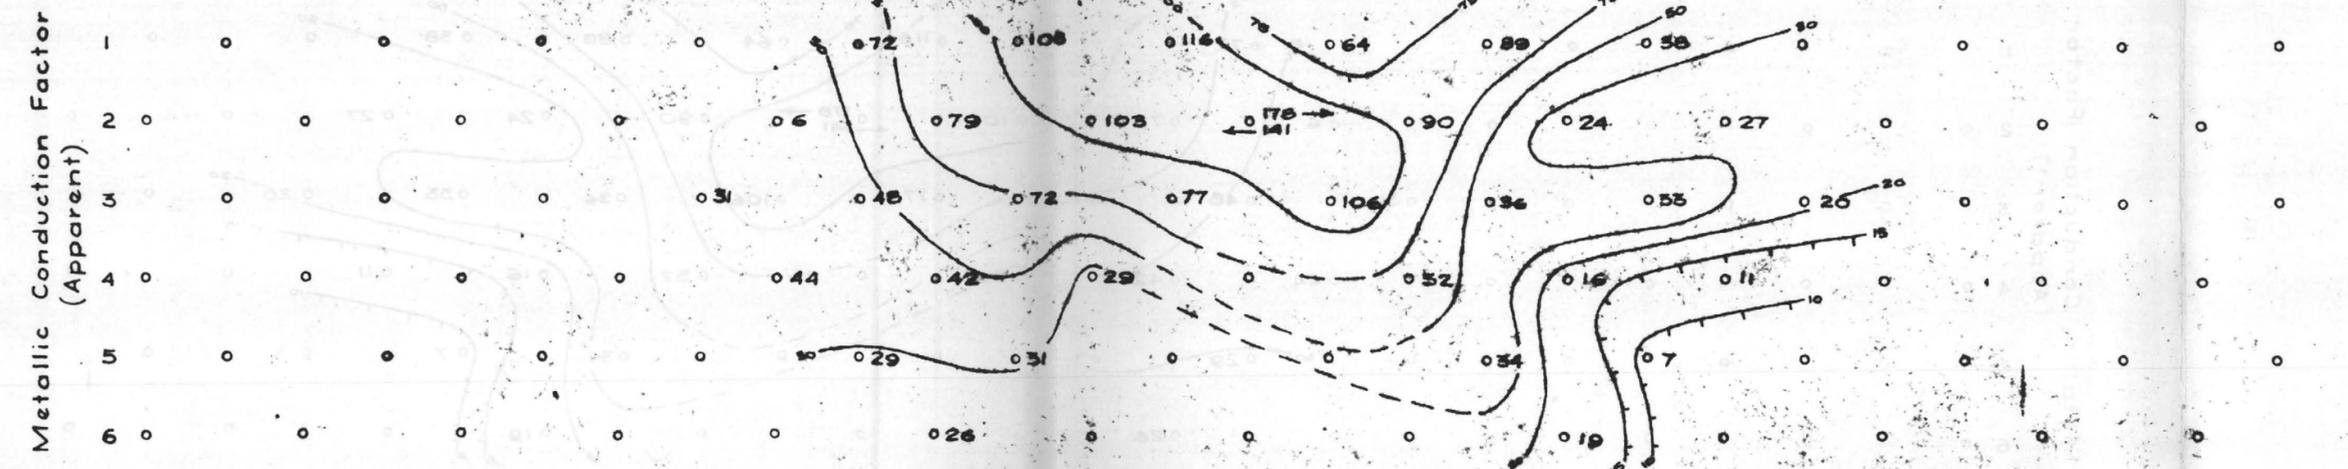

M.C.F.

QUIJTOA DISTRICT
PIMA COUNTY, ARIZONA


SECTIONAL DATA SHEET
for
HUNTING GEOPHYSICAL SERVICES INC.

LINE No. 1


INDUCED POLARIZATION SURVEY
HEINRICHS GEOEXPLORATION CO.

Scale: 1" = 500'
Date: Jan. 1963



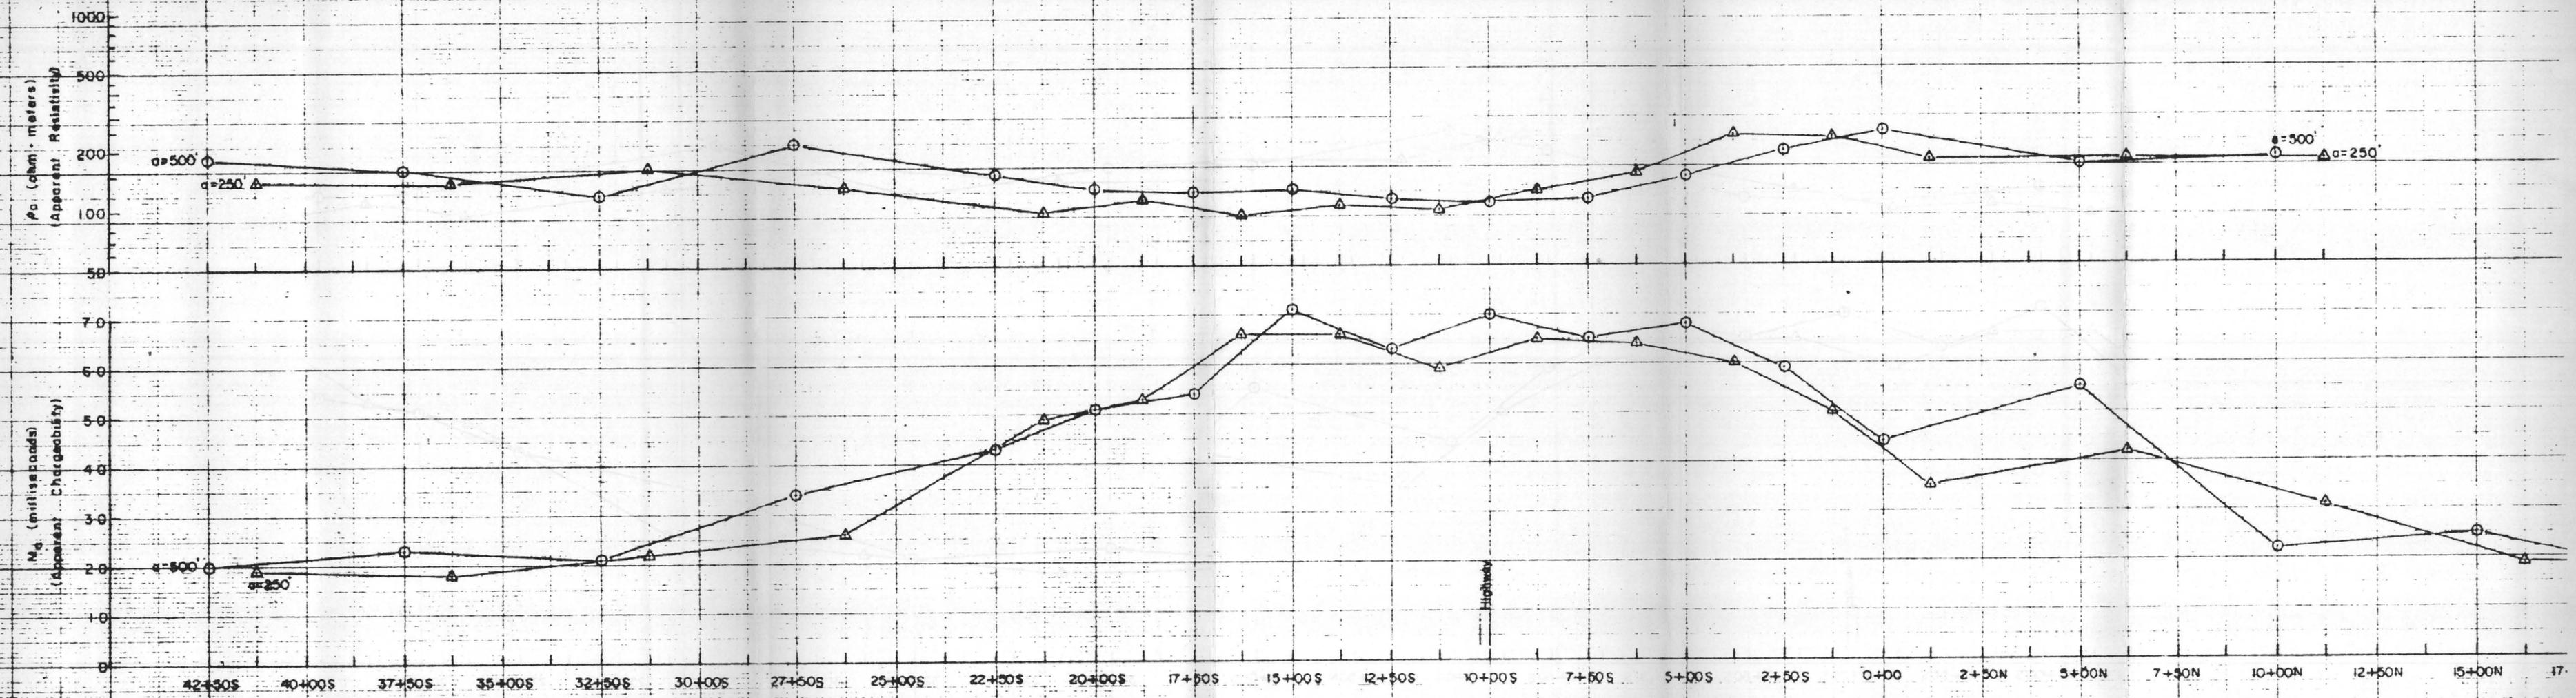

h < 100

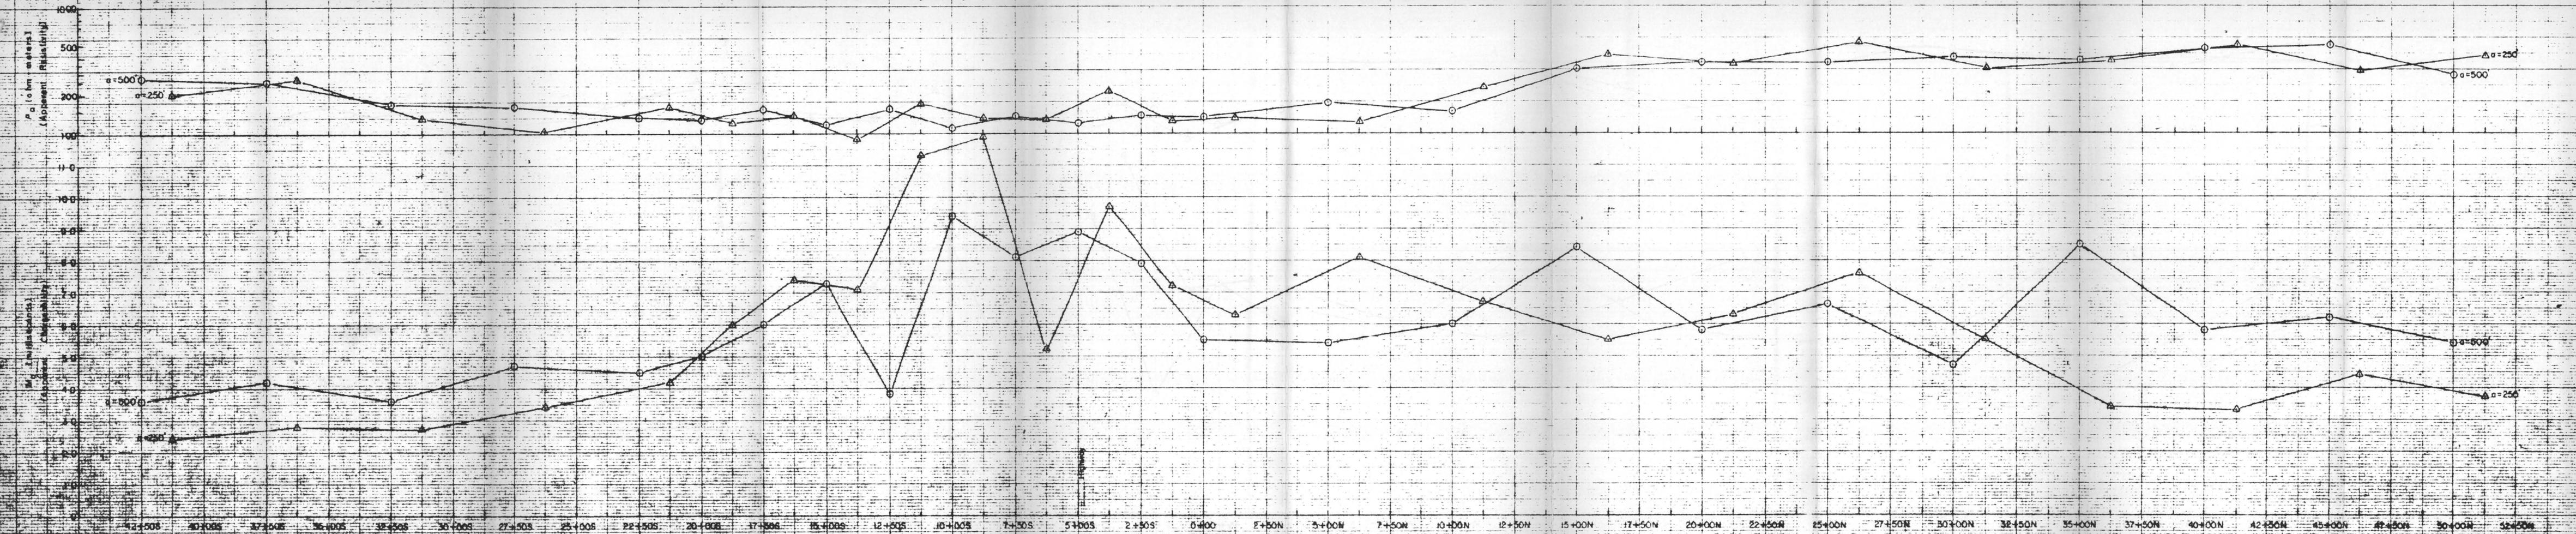

Possible side effects, or due to change in country rock causing a higher background