



CONTACT INFORMATION

Mining Records Curator
Arizona Geological Survey
1520 West Adams St.
Phoenix, AZ 85007
602-771-1601
<http://www.azgs.az.gov>
inquiries@azgs.az.gov

The following file is part of the

Arizona Department of Mines and Mineral Resources Mining Collection

ACCESS STATEMENT

These digitized collections are accessible for purposes of education and research. We have indicated what we know about copyright and rights of privacy, publicity, or trademark. Due to the nature of archival collections, we are not always able to identify this information. We are eager to hear from any rights owners, so that we may obtain accurate information. Upon request, we will remove material from public view while we address a rights issue.

CONSTRAINTS STATEMENT

The Arizona Geological Survey does not claim to control all rights for all materials in its collection. These rights include, but are not limited to: copyright, privacy rights, and cultural protection rights. The User hereby assumes all responsibility for obtaining any rights to use the material in excess of "fair use."

The Survey makes no intellectual property claims to the products created by individual authors in the manuscript collections, except when the author deeded those rights to the Survey or when those authors were employed by the State of Arizona and created intellectual products as a function of their official duties. The Survey does maintain property rights to the physical and digital representations of the works.

QUALITY STATEMENT

The Arizona Geological Survey is not responsible for the accuracy of the records, information, or opinions that may be contained in the files. The Survey collects, catalogs, and archives data on mineral properties regardless of its views of the veracity or accuracy of those data.

10/14/88

ARIZONA DEPARTMENT OF MINES AND MINERAL RESOURCES FILE DATA

PRIMARY NAME: RAMBLER LODGE

ALTERNATE NAMES:

MOHAVE COUNTY MILS NUMBER: 780

LOCATION: TOWNSHIP 23 N RANGE 18 W SECTION 2 QUARTER NE
LATITUDE: N 35DEG 25MIN 13SEC LONGITUDE: W 114DEG 10MIN 17SEC
TOPO MAP NAME: CHLORIDE - 7.5 MIN


CURRENT STATUS: EXP PROSPECT

COMMODITY:


GOLD LODGE
SILVER

BIBLIOGRAPHY:

ADMMR RAMBLER LODGE FILE

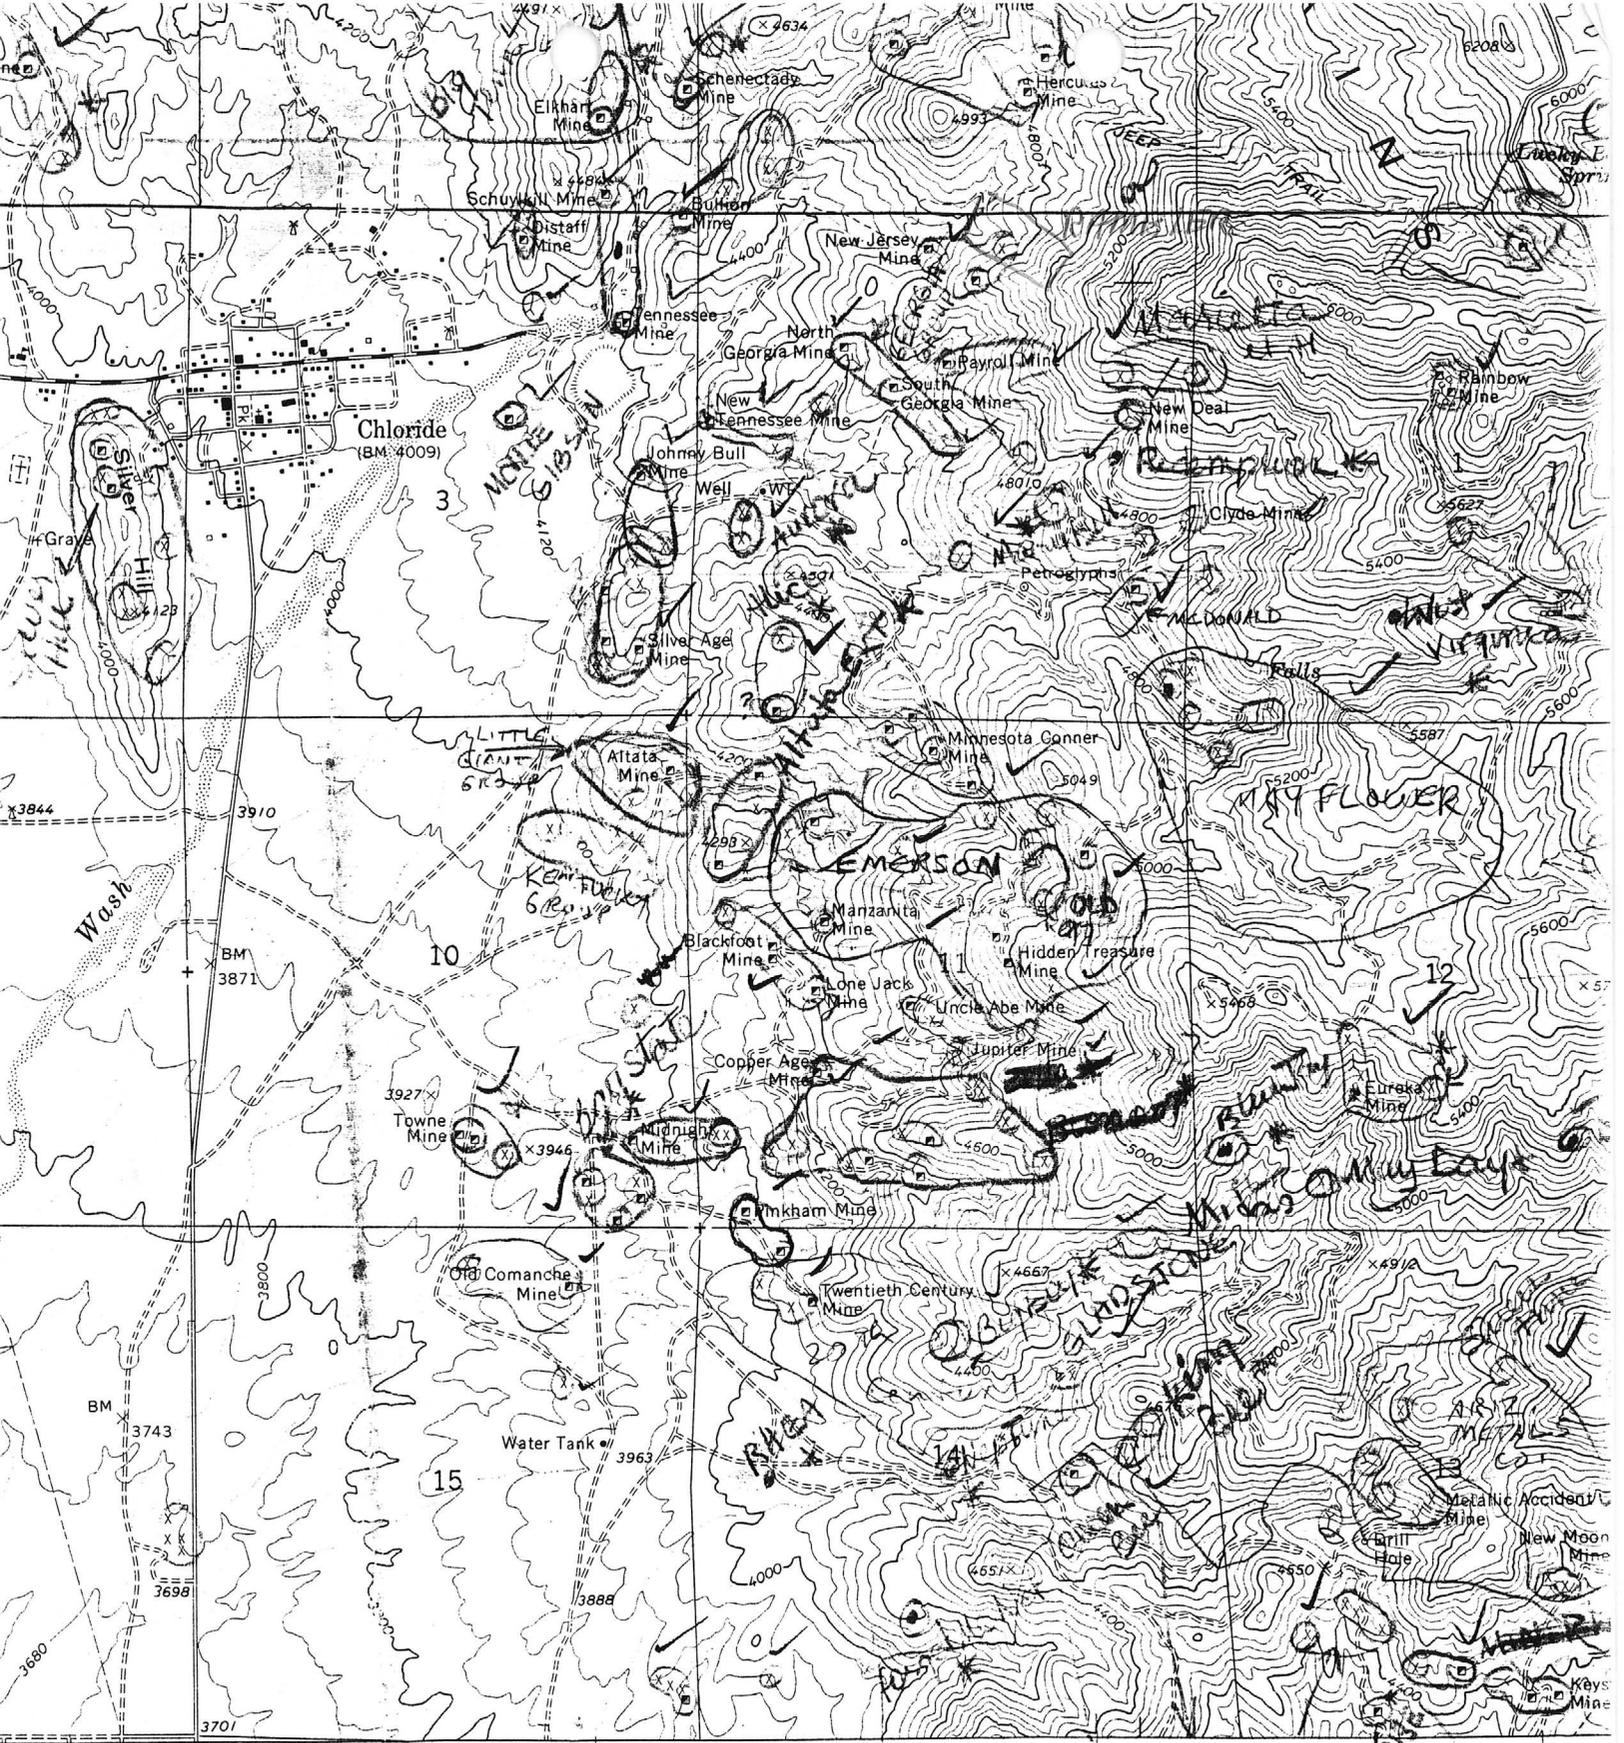

(CERBAT)
3154 1 SW
SCALE 1:24 000

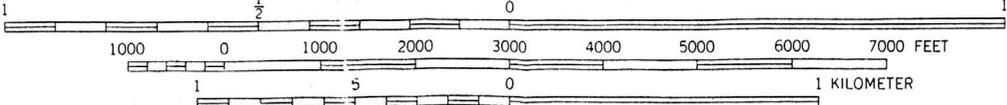

CONTOUR INTERVAL 40 FEET
DATUM IS MEAN SEA LEVEL



QUADRANGLE LOCATION

*Beverly
Monte Cristo
Tingulito
Morm. S.*

To: Ken

10/8/58

From: Fred Rothermal

Here is info on the Rambler
Mine near Chloride, Ariz in the Wallapai
Mining District. My brother and I
own the patented claim. It is about
2000 feet east of the Tennessee-Schuykill
Mine. The Dept can keep the info
for its mine files.

FH

RAMBLER MINE

WALLAPAI MINING DISTRICT

CHLORIDE, ARIZ.

RAMBLER CLAIM: Patented, 13.835 acres in Sec. 2, T23N, R18W
G. & S.R.B.L. & M.

PRODUCTION:	<u>Tons</u>	<u>Oz. Au</u>	<u>Oz. Ag</u>	Value/ton
1941	113	50	20	
1942	73	20	5	
	<u>186</u>	<u>70</u>	<u>25</u>	

(U.S. Bureau of Mines, Individual Mines Record Card)

MINE DEVELOPMENT:

Approximately 300' of drifting on vein
Approximately 60' of winze on vein
Other miscellaneous surface pits

GEOLOGY:

The Rambler mine consists of a single vein striking northwest and dipping steeply northeast. The vein cuts the pre-Cambrian complex of the Cerbat mountains, which at this point consists of granite, granite gneiss, and biotite gneiss, making for strong walls for open stoping.

Mineralization of the Rambler vein is principally quartz, with iron oxides, free gold, lead carbonate, lead sulfate, and sericitized granite, in walls somewhat altered by sericitization.

The vein is strong, and has not been followed to the end. This persistent structure very likely continues for several hundred feet. Mineralization on this vein is typical of that found in the shallow workings in the district, where ore persists in depth and maintains itself on strike and dip. This is typical of the mesothermal class of hydrothermal veins.

Deeper development would be expected to show an increase in lead-zinc values in the sulfide zone within 200 feet of the surface. Below that depth, ore should be fairly uniform in grade, with minable shoots principally located by structural controls.

To the northwest, the vein has not been traced, but exploration under the overburden on the slope should find this easily. Deeper development would be best accomplished by drifting on the vein at a lower elevation, which would aid in mine access as well.

200g

RAMBLER: (continued)

To the southeast, the vein can be followed on the surface for at least two hundred feet beyond the last workings in the mine. This persistence on strike is more notable than that of many of the good producers in the district, some of which have produced hundreds of thousands of tons.

The mine has not been adequately explored to determine its potential. The present price of gold (\$165) makes the property an attractive prospect with a very good chance of success as a small producer. At the same time the mine, if properly explored, may be found to contain minable shoots of high grade gold ore, with sulfide lead-zinc ore at depth also containing gold. Silver on this property appears to be of negligible value.

ORE RESERVES:

The Rambler mine dump, which represents material from drifting on the vein and winzing beneath the ore shoot, was sampled in 1970. This contains an estimated 3000 tons of material running 0.25 oz. Au/ton. in samples from the surface to 1' depth.

Within the mine, 90' of the vein is represented within an ore shoot, trailing into lower grade material on the ends. Typically, additional drifting would produce widening and additional ore shoots. This 90' develops the vein to a depth of 80' below the surface, and assuming ore to continue 40' above the drift and 20' below, 3' wide, the probable ore would be 1200 tons of 0.25 oz. Au.

No samples have been taken in the winze, which lacks ladders at this time.

CONCLUSIONS:

The Rambler stands a good chance of succeeding as a small producer at present gold prices, and also carries the speculative possibility of high grade bodies not yet found, plus minable lead-zinc ores at depth.



Dump ore

Hercules +

Badger -

	Au	Ag	Pb %	
Hercules Dump Ore File	0.63 oz/ton	1.2 oz/ton	1.5	+ 3/4"
	0.28	2.1	2.1	- 3/4"
Hercules west dump	0.11	4.93	-0.1	
	0.19	2.20	2.65	Bulk sample, 100#
	tr	1.04	1.80	
Hercules East Dump		21.5178	35.14	Av. 0.10Au 2.7Ag 1.5 Pb
	.08	6.34	bulk sample	\$12.75/ton
	.06	2.08		
	.06	5.09		
	<u>.111</u>	<u>4.07</u>	Av. .075Au	4.3 Ag \$10.00/

3000 T

3000

Badger dump	Au	Ag	Pb	Value
surface samples,	0.04	14.74	av. 0.06Au 13.5Ag	\$25/ton
" 2 "	0.06	11.26		\$ 85
" "	0.07	14.57		
Dump face where cut	0.45	9.73	2.4 Pb	\$40/ton


2000 T.

Rambler Dump	0.184Au	3.11 Ag.	\$12/ton
--------------	---------	----------	----------

2000 T.

4 40 000

48.32

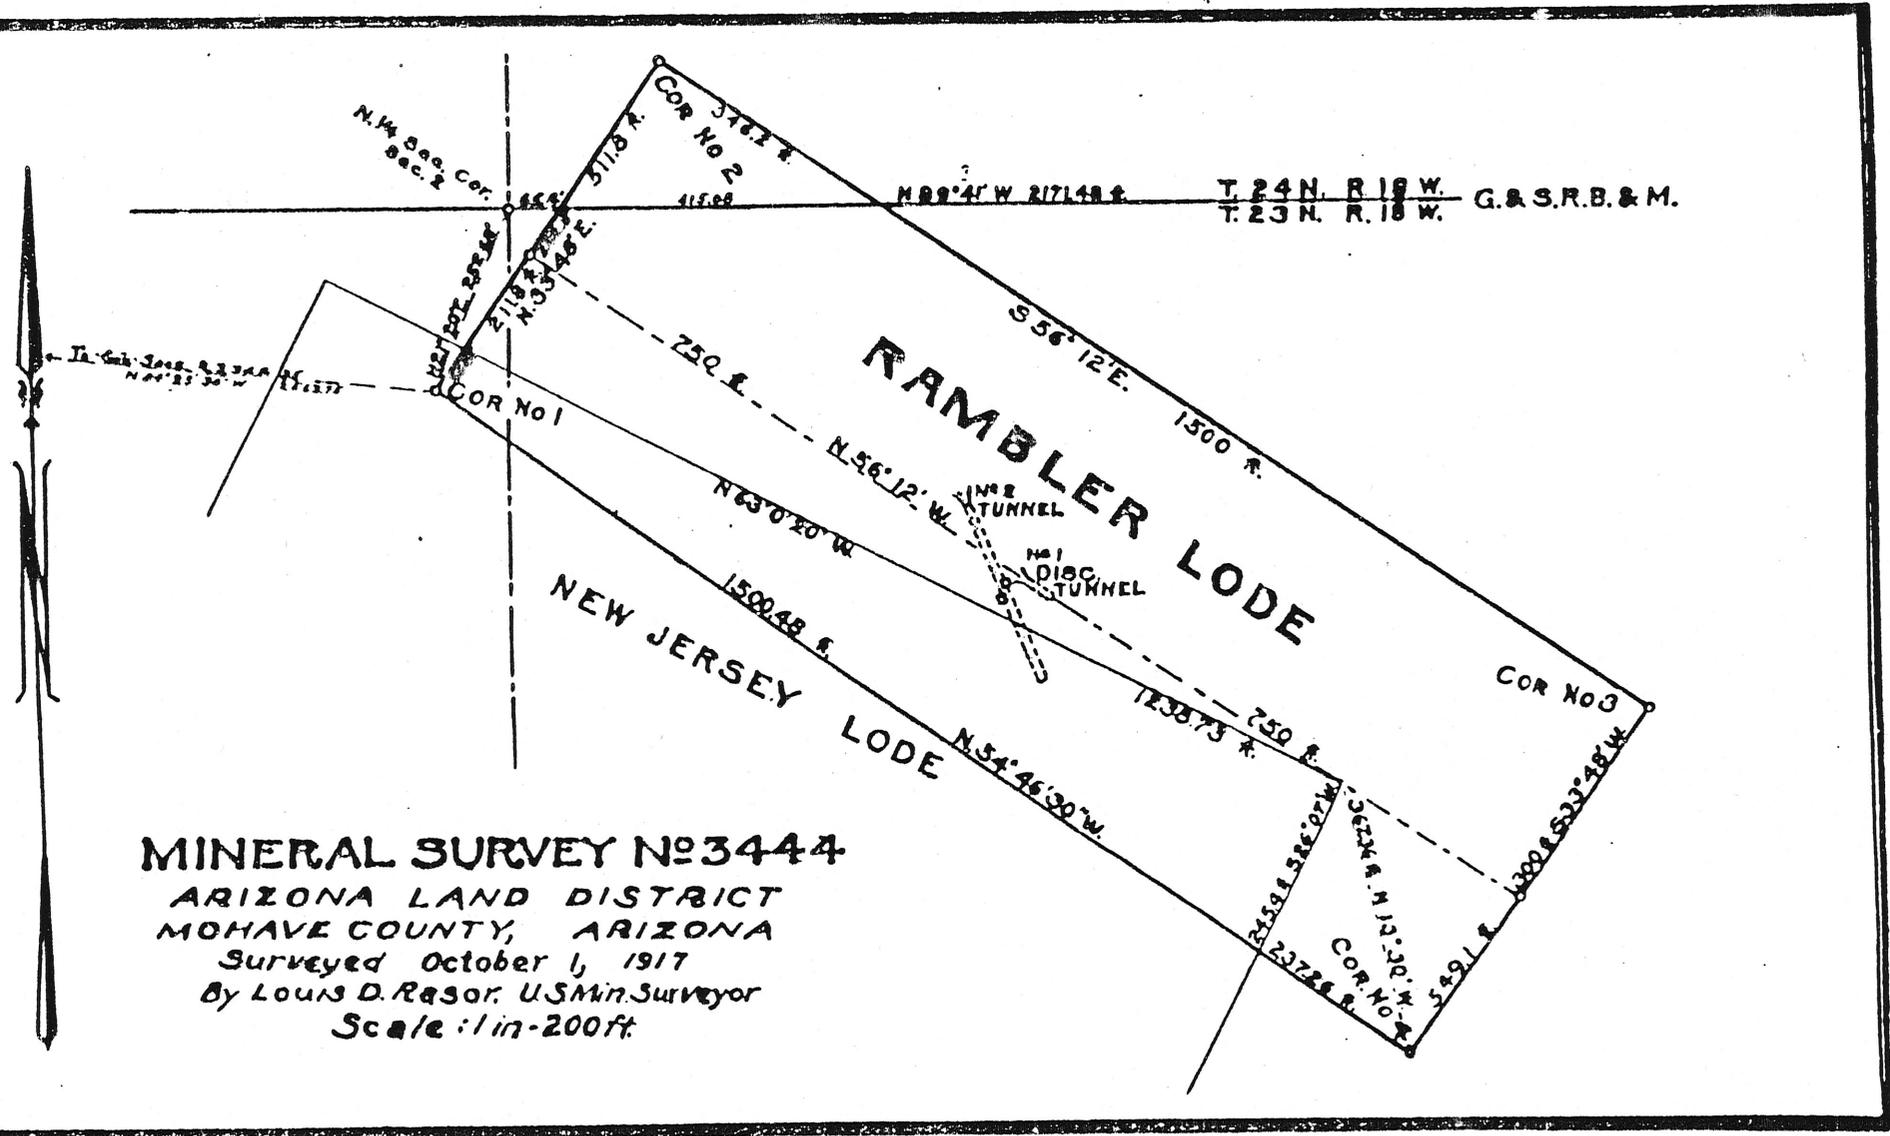

MINERAL SURVEY No 3444
 ARIZONA LAND DISTRICT
 MOHAVE COUNTY, ARIZONA
 Surveyed October 1, 1917
 by Louis D. Rasor, U.S. Min. Surveyor
 Scale: 1 in = 200 ft.

N. 1/4 Sec. 2, Cor. 2
 Sec. 2

M 22° 41' W 2171.48 ft.

T. 24 N. R. 18 W. G. & S. R. B. & M.
 T. 23 N. R. 18 W.

Ta. Sub. Sec. 2, 3, 4, 5
 N 44° 25' 30" W

COR No 1

RAMBLER LODE

NEW JERSEY LODE

COR No 3

COR No 2

No 2 TUNNEL

No 1 DISC TUNNEL

511.8 ft.
 211.8 ft.
 N. 37° 46' E.

376.1 ft.
 COR No 2

415.68

S 56° 12' E.

1500 ft.

N 63° 20' W

1500 ft.

N 54° 46' 30" W

1533.73 ft.

250 ft.

S 54° 46' 30" W

1500 ft.


S 56° 12' E.

1500 ft.

N 12° 30' W

549.1 ft.

2372.8 ft.

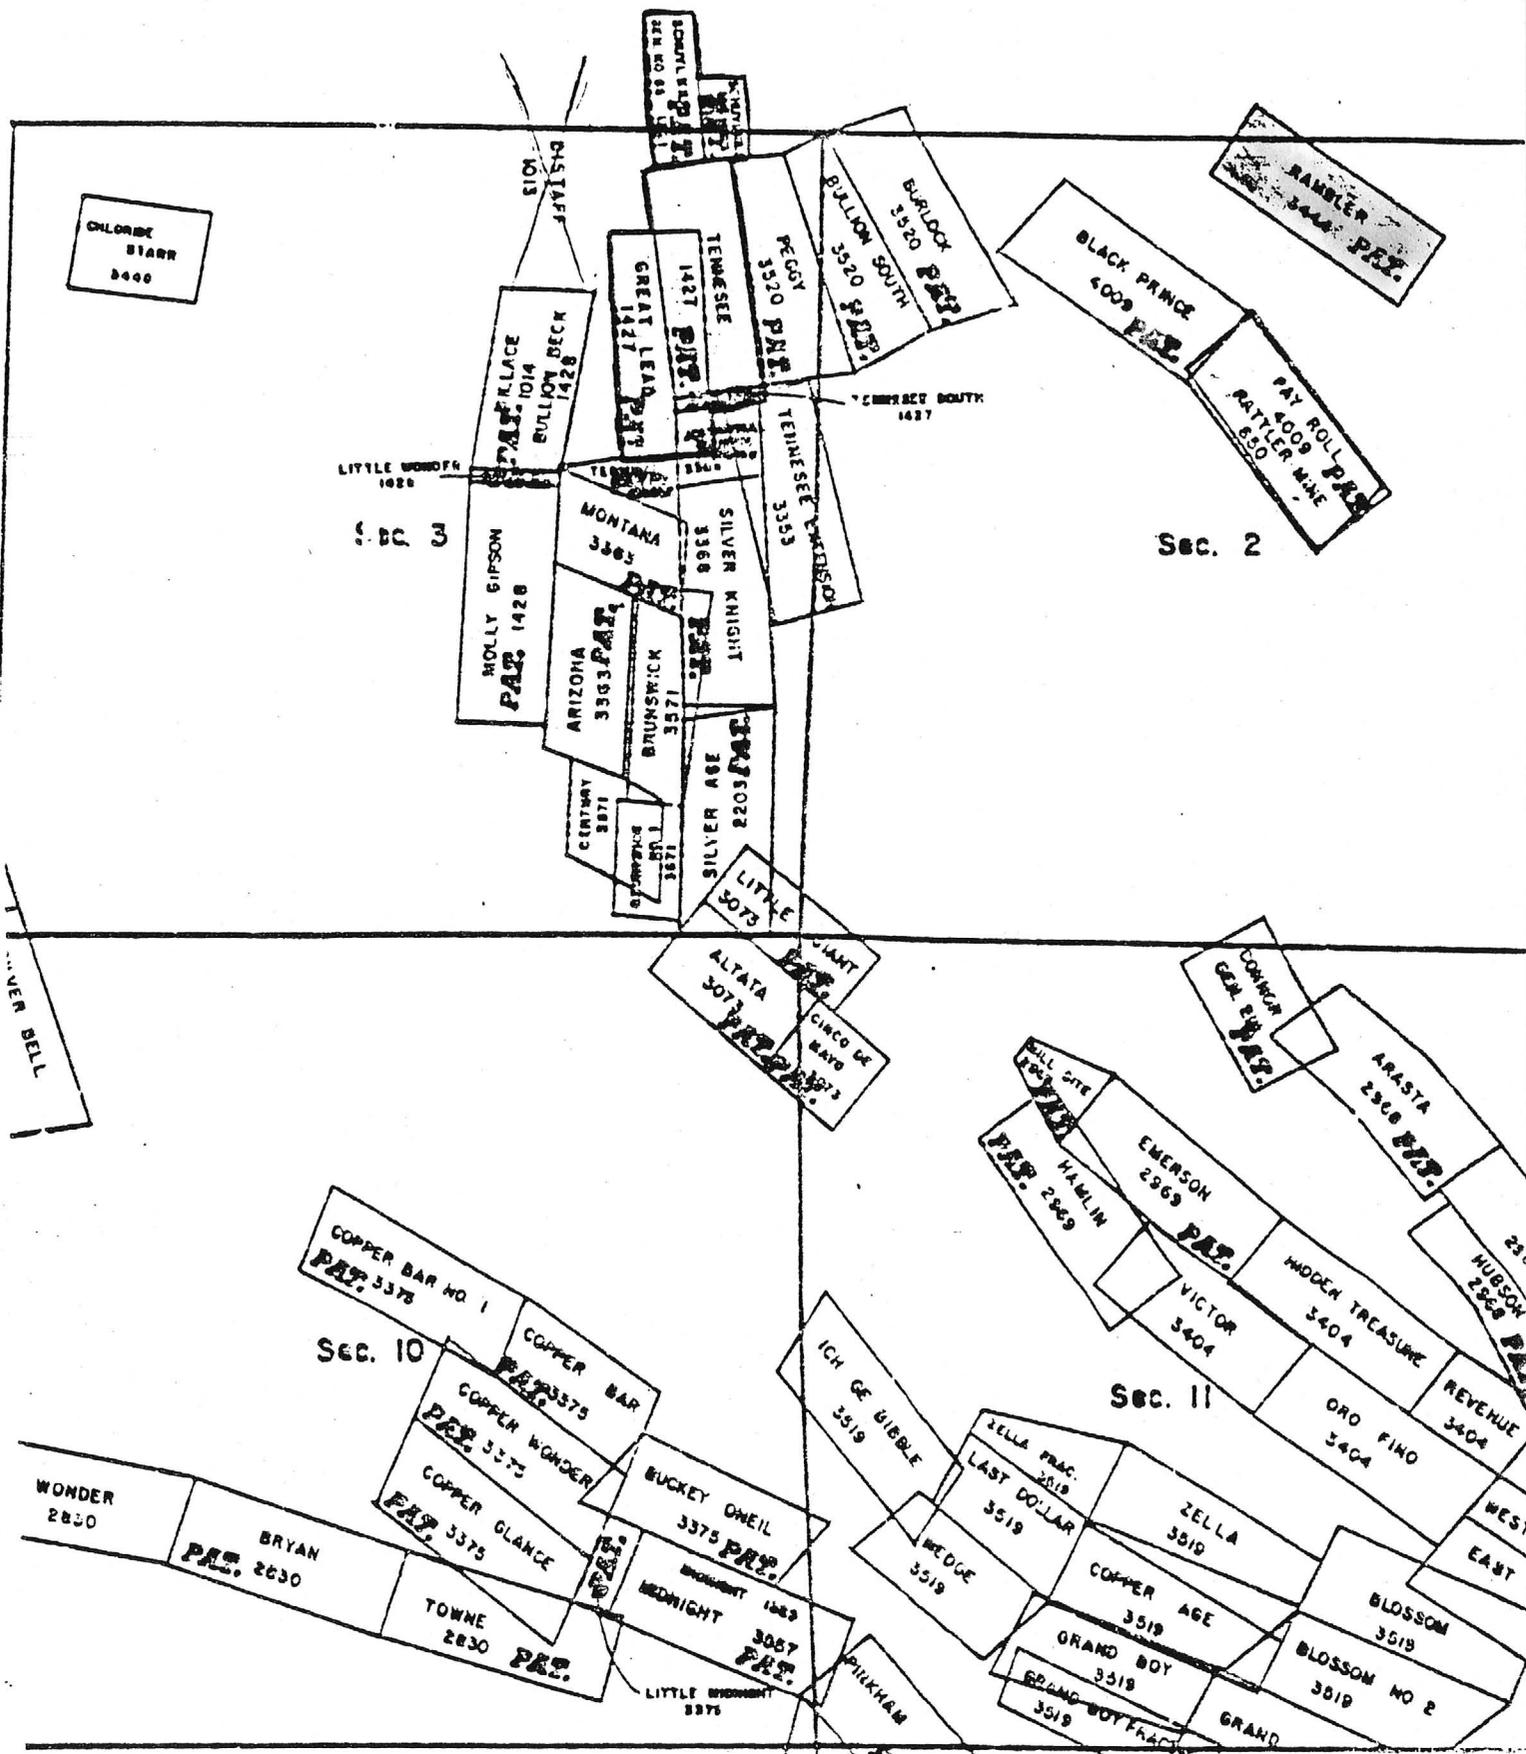

CHLOE BEARR
3400

RANBLER
3444 PAT.

BLACK PRINCE
4009 PAT.

PAY ROLL
4009 PAT.
PATTY MILL
4050

Sec. 2

LITTLE WONDRA
1026

SEC. 3

WILLIAMS PLACE
1014 PAT.
BULLION BECK
1428

MONTANA
3363

ARIZONA
3363 PAT.

CENTWAY
1871

GREAT LEAD
1427 PAT.

SILVER KNIGHT
3368

BRUNSWICK
1755

LITTLE
1281

ALTATA
3073 PAT.

BUCKEY ONEIL
3375 PAT.

MIDNIGHT
3057 PAT.

LITTLE WONDRA
3375

PECOYA
3520 PAT.

TEENIESEE
3359

BULLION SOUTH
3520 PAT.

SILVER BELL

SEC. 10

COPPER BAR NO 1
PAT. 3378

COPPER BAR
PAT. 3375

COPPER WONDRA
PAT. 3375

COPPER GLANCE
PAT. 3375

COPPER GLANCE
PAT. 3375

COPPER GLANCE
PAT. 3375

BRYAN
PAT. 2030

TOWNE
2830

BUCKEY ONEIL
3375 PAT.

BUCKEY ONEIL
3375 PAT.

BUCKEY ONEIL
3375 PAT.

ICH GE GIBBLE
3519

WEDGE
3519

WEDGE
3519

WEDGE
3519

HAMLIN
PAT. 2869

EMERSON
2969

EMERSON
2969

EMERSON
2969

EMERSON
2969

EMERSON
2969

CONNER
PAT. 3348

ARASTA
2368 PAT.

HUBSON
2868 PAT.

MODER TREASURE
3404

MODER TREASURE
3404

MODER TREASURE
3404

MODER TREASURE
3404

REVENUE
3404

REVENUE
3404

REVENUE
3404

REVENUE
3404

ORO FINO
3404

ORO FINO
3404

ORO FINO
3404

SEC. 11

LAST DOLLAR
3519

LAST DOLLAR
3519

LAST DOLLAR
3519

ZELLA
3519

ZELLA
3519

ZELLA
3519

COPPER AGE
3519

COPPER AGE
3519

BLOSSOM
3519

BLOSSOM
3519

WEST
EAST

GRAND BOY
3519

BLOSSOM NO 2
3519

BLOSSOM NO 2
3519

BLOSSOM NO 2
3519

BLOSSOM NO 2
3519

A L H

4-223

MINERAL SURVEY No. 3444

Arizona

Land District.

FIELD NOTES

OF THE SURVEY OF THE MINING CLAIM OF

Arizona Real Estate Mining Company

KNOWN AS THE

Fambler Mine

Yavapai

Mining District,

McHale

County, Arizona

35

24 N.

18 W. Unappd. B.

Section 2, Township 23 N., Range 18 E., S. 1.

E. 2 1/2.

Surveyed under instructions dated September 24, 1917.

by Louis A. Baker,

U. S. Mineral Surveyor.

Claim located See location notice, 19

Survey commenced September 18, 1917.

Survey completed October 1, 1917.

Address of claimant A. T. Dunbar, President, 33 Fremont St., San Francisco, Cal.

DATES OF AMENDED LOCATIONS.

September 13, 1917.

308-03-002

SURVEY NO. 3444.

RAVELLER LODGE

Beginning at Cor. No. 1

A pine post, 4 ft. long, 4 ins. square, set 18 ins. in the ground, with mound of stones, scribed R. 1-3444, whence

The 1/4 Cor. between Sec. 2, T. 23 N., R. 18 W., and Sec. 35, T. 24 N., R. 18 W., bears N. 21° 20' E. 252.68 ft.
The Cor. of Secs. 2, 35 & 36, T. 23 & 24 N., R. 18 W., bears N. 24° 29' 30" W. 2541.75 ft.

A cross (+) and BR-R. 1-3444, chiseled on face of granite outcrop 24x36 ins. 24 ins. above ground, bears N. 50° 44' W. 9.8 ft.

No other bearing objects available.

Feet

Thence N. 55° 48' E.

55.71 Intersect north side line New Jersey Lode, unsurveyed, at N. 63° 00' 20" W. 1238.73 ft. from the N. E. Cor.

211.8

To the T. & C. A pine post, 4 ft. long, 4 ins. square, set 18 ins. in the ground, with mound of stones, scribed T. & C. 3444.

282.8

Intersect line between Secs. 2 and 35 at S. 89° 41' E. 65.4 ft. from the 1/4 Cor. and N. 89° 41' W. 2586.56 ft. from the Cor. of Secs. 1, 2, 35 and 36.

511.8

Cor. No. 2. A cross (X) at corner point, and R. 2-3444, chiseled on face of granite cliff 6x10 ft. 7 ft. above ground, with mound of stones, along side.

A cross (+) and BR-R. 2-3444, chiseled on face of granite outcrop 5x7 ft. 5 ft. above ground, bears N. 37° 52' W. 16.4 ft.

No other bearing objects available.

Thence S. 56° 12' E.

346.2

Intersect line between Secs. 2 and 35 at N. 89° 41' W. 2171.48 ft. from the Cor. of Secs. 1, 2, 35 and 36, and S. 89° 41' E. 489.48 ft. from the 1/4 Cor.

1500.

Cor. No. 3.

SUNAVY NO. 3444.

ieet

RAMELKA LODGE--Continued.

A pine post 4 ft. long, 4 ins. square, set 12 ins. in ground, on bedrock, with mound of stone, scribed R. 3-3444.

A cross (+) and E.R.-R. 3-3444, chiseled on face of granite outcrop, 5x7 ft., 4 ft. above ground, bears S. 78° 01' W. 4.3 ft.

No other bearing objects available.

Thence S. 33° 48' W.

300. To F.E.C.

A cross (+) at center point and F.E.C., R.-3444, chiseled on face of granite outcrop 3x4 ft., 2 ft. above ground, with mound of stone along side.

549.1 Cor. No. 4.

A pine post 4 ft. long, 4 ins. square, set 12 ins. the ground, with mound of stone, scribed R.-3444. thence

The N.E. Cor. New Jersey lode: unsurveyed, bears N. 13° 30' E., 367.36 ft.

A cross (+) and E.R.-R-4-3444, chiseled on face of granite outcrop 3x3 ft., 2 ft. above ground, bears N. 55° 12' W. 8. ft.

No other bearing objects available.

Thence N. 54° 46' 30" W.

237.26 Intersect east end line of New Jersey lode, unsurveyed, at S. 26° 07' W. 245.4 ft. from the N.E. Cor.

1500.48 Cor. No. 1, the place of beginning.

Variation at all corners 15° 40' E.

LODE LINE.

As near as can be determined from present develop-
ments the vein of this location extends from the dis-
covery point:

S. 58°12' E., 750 ft. and N. 56°12' W., 750 ft.

AREA.

Total area Rambler lode

Acres.
18.283 X

Area in conflict with

New Jersey lode, unprov, 4.431.

The survey of this location is identical with the
Location as staked upon the ground.

LOCATION.

This survey is located in Sec. 2, T. 23 N., R. 18
W., surveyed, and Sec. 35, T. 24 N., R. 18 W., S. & S.
R. E. & M., unapproved survey.

EXPENDITURE OF FIVE HUNDRED DOLLARS.

I certify that the value of the labor and improve-
ments made upon, or for the benefit of this location, is
Thirty-Five Hundred and Seventy Dollars, and that said
improvements consist of:

No. 1. The discovery cut, the mouth of which being
the discovery point, is on the center line, 750 ft.,
from a point on line 1-2, N. 33°48' E., 211.8 ft., from
Cor. No. 1, 4 ft. wide, 10 ft. face, running S. 56°12'
E., 15 ft., thence a tunnel 4 x 6 ft., running S. 56°
12' E., 30 ft. to a point where tunnel is caved shut.

Value of cut and tunnel, \$400.00.

No. 2. A cut, the mouth of which, bears from Cor.
No. 2, S. 34°20' E., 575 ft., 4 ft. wide, 10 ft. face,
running S. 23°30' E., 30 ft., thence a tunnel 4 x 6 ft.,
running S. 23°30' E., 115 ft. to a shaft 4 x 6 ft., 40

ft. deep, 135 ft. to a raise 4 x 6 ft., 15 ft. high, 255 ft. to face.

Value \$3170.00.

 INSTRUMENT.

This survey was made with a C. L. Berger & Sons Transit, No. 3164. The courses were deflected from the true Meridian as determined by observation on polaris as follows:

Sept. 29, 1917, I set instrument at Cor. No. 1, and at 6 hours, 38 minutes, Pacific Standard time, observed polaris in eastern elongation and marked the line thus determined by a stake 300 ft. from the corner,

Latitude of station 35°20', N.

Azimuth of polaris N. 1°23' E.

Deflect 32°25' to the right to Cor. No. 2.

Course of line 1-2, N. 33°48' E.

The distances were measured with 100 ft. and 500 ft. steel tapes.

 REPORT.

The lode line of this location was run directly upon the ground, and the several corners established by means of offsets from the lode line. All tie lines were run directly upon the ground.

The $\frac{1}{4}$ Cor. in the north boundary of Sec. 2, T. 23 N., R. 18 W., S. & S. R. E. & M. is a $\frac{1}{2}$ inch iron post, marked $\frac{1}{4}$ S. 2.

The N. E. Cor. Sec. 2 is a 3 inch post marked S 1, S 2, S 35 and S. 36, T 23 N., R 18 W and T. 24 N, R 18 W., G & S R B & M.

The north boundary of the N.E. $\frac{1}{4}$ Sec. 2 was found to be N. 29°41' W., 2651.96 ft., instead of N. 29° 52' W., 2640 ft., as approved.

A list
 United States
 boundaries

known as
 and show

 XXXI

 Page

the bound

 known as

represent

direction

and corners

tions fu

FINAL OATHS FOR SURVEYS.

LIST OF NAMES.

A list of the names of the individuals employed by Louis D. Russell,
United States Mineral Surveyor, to assist in running, measuring, and marking the lines, corners, and
boundaries described in the foregoing field notes of the survey of the mining claim of
Arizona Eastern Mine Company,
known as the Hamblar lode
and showing the respective capacities in which they acted.

C. A. Douglas Chairman
~~XXXXXXXXXXXXXXXXXXXXXXXXXXXX~~
~~XXXXXXXXXXXXXXXXXXXXXXXXXXXX~~
~~XXXXXXXXXXXXXXXXXXXXXXXXXXXX~~ ; Foreman

FINAL OATHS OF ASSISTANTS.

~~XXX~~ I. C. A. Douglas,
~~XXXX~~ do solemnly swear that ~~we~~ ^I assisted Louis D.
Russell United States Mineral Surveyor, in marking the corners and surveying
the boundaries of the mining claim of Arizona Eastern Mine Company,
known as the Hamblar lode
represented in the foregoing field notes as having been surveyed by said mineral surveyor and under his
direction; and that said survey has been in all respects, to the best of ~~our~~ ^{my} knowledge and belief, faithfully
and correctly executed, and the corner and boundary monuments established according to law and the instruc-
tions furnished by the United States Surveyor-General for Arizona.

C. A. Douglas
~~XXXXXXXXXXXXXXXXXXXXXXXXXXXX~~
~~XXXXXXXXXXXXXXXXXXXXXXXXXXXX~~
~~XXXXXXXXXXXXXXXXXXXXXXXXXXXX~~

Subscribed and sworn to by the above-named persons before me this 20th
day of October 19 20

J. M. Russell
Notary Public

*My commission
expires Feb. 28th 1920*

high, 255
2.
Sons
from the
polaris
1, and
CO-
300
e CO-
3' E.
and 500 ft.
rectly up-
shed by
lines were
2, T. 23
ron post,
rked S 1,
N, R 18
as found
89°

FINAL OATH OF U. S. MINERAL SURVEYOR.

I, Louis D. Pasor, U. S. Mineral Surveyor, do solemnly swear that, in pursuance of instructions received from the United States Surveyor General for Arizona, dated September 24, 1917, I have, in strict conformity to the laws of the United States, the official regulations and instructions thereunder, and the instructions of said Surveyor General, faithfully and correctly executed the survey of the Mining Claim of Arizona Eastern Mines Company, known as the Rambler lode, situate in Tallapoosa Mining District, DeKalb County, Arizona, in Section 35, Township No. 23 N., Range No. 18 W., and designated as Survey No. 3444, as represented in the foregoing field notes, which accurately show the boundaries of said mining claim as distinctly marked by monuments on the ground, and described in the attached copy of the location certificate, which was received by me from the Surveyor General with said instructions, and that all the corners of said survey have been established and perpetuated in strict accordance with the law, official regulations and instructions thereunder; and I do further solemnly swear that the foregoing are the true and original field notes of said survey and my report therein, and that the labor expended and improvements made upon said mining claim by claimant or its grantors are as therein fully stated, and that the character, extent, location, and itemized value thereof are specified therein with particularity and full detail, and that no portion of said labor or improvements so credited to this claim has been included in the estimate of expenditures upon any other claim.

Louis D. Pasor
U. S. Mineral Surveyor.

Subscribed and sworn to by the said Louis D. Pasor
U. S. Mineral Surveyor, before me J. M. Russell
Notary Public this 26th
day of Oct, 1917

J. M. Russell
Notary Public

My commission expires
Feb. 28th 1920.

MINING CLAIMS

.....LODE CLAIM.

KNOW ALL MEN BY THESE PRESENTS: That the Arizona Western Mines Company, a corporation does hereby make and file, this his amended and additional certificate of location upon the Rambler lode mining claim, claiming and locating, by right of original discovery and this amended and additional location-certificate, three hundred feet in width on each side of the center of said lode at the surface, and all lodes, veins and ledges within the lines of said claim, with all their dips, variations, spurs and angles, claiming and locating 1500 feet, linear and horizontal measurement on said lode, said lode running S. 56 degrees, 12 minutes E. 1500 feet from the westerly center end monument thereof. Said claim is more particularly described in the field-notes hereinafter set forth, to-wit:

Beginning at the S. W. Cor. No. 1, a post 4"x4"-4' long set in a mound of stone marked "S.W. Cor. No.1"; thence N. 33 degrees 48 minutes E. 211.8 feet to a post 4"x4"-4' long set in a mound of stone marked "W. C.E.", thence E. 33 degrees 48 minutes E. 300 feet to Cor. No. 2, a post 4"x4"-4' long set in a mound of stone marked "N.W. Cor. No.2"; thence S. 56 degrees 12 minutes E. 1500 feet to Cor. No. 3, a post 4"x4"-4' long set in a mound of stone marked "N.E. Cor. No.3"; thence S. 33 degrees 48 minutes W. 300 feet to a post 4"x4"-4' long set in a mound of stone marked "E. C.E."; thence S. 33 degrees, 48 minutes W. 249.1 feet to Cor. No. 4, to a post 4"x4"-4' long set in a mound of stone marked "S.E. Cor. No.4", thence N. 54° 46' W., 1500.5 feet to Cor. No. 1, the place of beginning. The point of discovery is on the lode line 750 Ft. from line 1-2. From Cor. No. 1, the $\frac{1}{2}$ Cor. in the north line of Sec. 2, T. 23 N., R. 18 W., G. & S. R. B. & M. bears N. 21°20' E. 252.68 ft.

Said lode mining claim is situated upon Sec. 2, T. 23 N. R. 18 W. G. & S. R. B. & M. in the Wallapai Mining District, in the County of Mohave, in the State of Arizona.

This is the same lode and claim of which the original notice or certificate of location was recorded December 1904, in book P. at page 767, mining records in the office of the county recorder of said Mohave County.

-2-

THE NAME of said lode; claim is the Rambler.

THIS AMENDED and additional location is made and filed without waiver of any previous right or rights acquired, made and secured under said former location, for the purpose of correcting any error or errors in said prior location, descriptions, or record, and make more specific the boundaries and descriptions of said claim, and the purpose of acquiring and holding any overlapping, abandoned, forfeited claim or vacant ground.

DATE of this amended location and of this certificate is this 13th day of September A.D. 1917.

Arizona Western Mines Company

Locator.

A. T. Dunbar.

Filed and recorded at request of A. T. Dunbar September 14th A.D. 1917 at 30 minutes past 9 o'clock A.M. in Book S.S. of Mines, PagesRecords of Mohave County, Arizona.

H. L. Underwood,
County Recorder.
By Justin Tracer,
Deputy Recorder.

THE NAME of said lode claim is the Rambler.

THIS AMENDED and additional location is made and filed without waiver of any previous right or rights acquired, made and secured under said former location, for the purpose of correcting any error or errors in said prior location, descriptions, or record, and make more specific the boundaries and descriptions of said claim, and the purpose of acquiring and holding any overlapping, abandoned, forfeited claim or vacant ground.

DATE of this amended location and of this certificate is this 13th day of September A.D. 1917.

Arizona Western Mines Company
Locator.

A. T. Dunbar.

Filed and recorded at request of A. T. Dunbar September 14th A.D. 1917 at 30 minutes past 9 o'clock A.M. in Book S.S. of Mines, PagesRecords of Mohave County, Arizona.

H. L. Underwood,
County Recorder.
By Justin Fraser,
Deputy Recorder.

STATE OF ARIZONA }
County of Mohave } ss.

I, H. L. Underwood, Recorder of Mohave County, State of Arizona, do hereby certify that I have compared the foregoing copy .of Amended Location Notice.. of the Rambler Lode Mining Claim, and of the endorsement thereon with the original records of the same on file in this office, and that the same are correct transcripts therefrom and of the whole of said original records.



WITNESS my hand and the seal of said office this ...15th... day of ...September....., 191..7.

H. L. Underwood
Recorder of Mohave County, Arizona.

U. S. SURVEYOR-GENERAL'S FINAL CERTIFICATE ON FIELD NOTES.

Department of the Interior,

OFFICE OF U. S. SURVEYOR-GENERAL,

Phoenix, Arizona.

April 19, 1918.

I, U. S. Surveyor-General for District of Arizona

do hereby certify that the foregoing transcript of the Field Notes, return and approval of the survey of the mining claim of

ARIZONA WESTERN MINES COMPANY

known as the RAMBLER LODE

situate in WALLAPAI

Mining District, MOHAVE County, ARIZONA

in Section 35, Township No. 24 N., Range No. 18 W. unapp'd., and and 2, " " 23 N., " " 18 W. designated as Survey No. 3444, has been correctly copied from the originals on file in

this office; that said Field Notes furnish such an accurate description of said mining claim as will, if incorporated into a patent, serve fully to identify the premises, and that such reference is made therein to natural objects or permanent monuments as will perpetuate and fix the locus thereof.

And I further certify that five hundred dollars' worth of labor has been expended or improvements made upon said mining claim by claimant or its grantors, and that said improvements consist of 2 cut and tunnels, 1 shaft and 1 raise, total value \$3570.

[Empty lines for additional details]

and that no portion of said labor or improvements has been included in the estimate of expenditures upon any other claim.

I further certify that the plat thereof, filed in the U. S. Land Office at Phoenix,

ARIZONA is correct and in conformity with the foregoing Field Notes.

Frank P. Trott

United States Surveyor-General for ARIZONA

4-887.

SURVEYOR-GENERAL'S CERTIFICATE OF APPROVAL OF FIELD NOTES AND SURVEY OF MINING CLAIM.

Department of the Interior,

OFFICE OF U. S. SURVEYOR-GENERAL,

Phoenix, Arizona.

April 19, 1918.

I, U. S. Surveyor-General for District of Arizona

do hereby certify that the foregoing and hereto attached Field Notes and Return of the Survey of the Mining Claim of

ARIZONA WESTERN MINES COMPANY

known as the

RAMBLER LODGE

situate in WALLAPAI mining district,

MOHAVE County, ARIZONA

in Section 35, Township No. 24 N., Range No. 18 W., unapp'd., and " 2 " " 23 N., " " 18 W., designated as Survey No. 3444

executed by Louis D. RASOR, United States Mineral

Surveyor, September 18-October 1, 1917, under my instructions dated

September 24, 1917, have been critically examined and the necessary cor-


rections and explanations made, and the said Field Notes and Return, and the Survey they describe,

are hereby approved. A true copy of the copy of the location certificate filed by the applicant for

survey is included in the field notes.

[Handwritten signature]

U. S. Surveyor-General for Arizona.

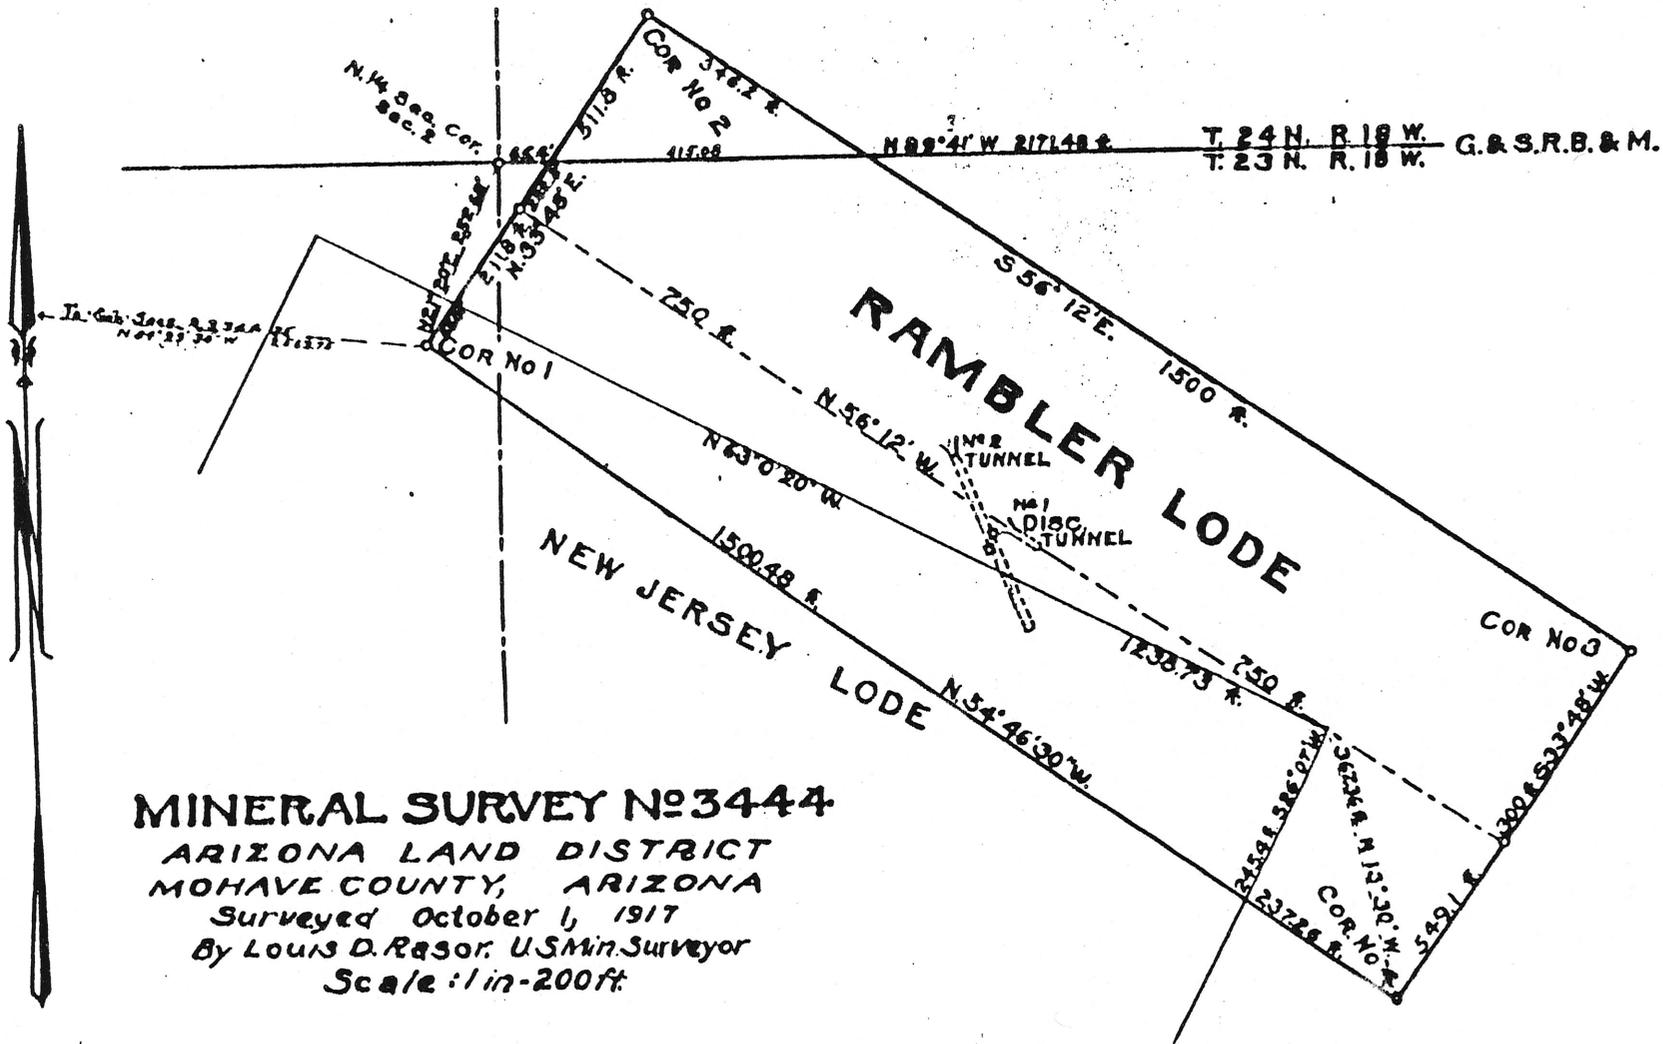

MINERAL SURVEY NO 3444

ARIZONA LAND DISTRICT
 MOHAVE COUNTY, ARIZONA

Surveyed October 1, 1917

By Louis D. Razor, U.S. Min. Surveyor

Scale: 1 in = 200 ft.

RAMBLER

Prescott Courier: At Columbia several new ore chutes have been opened up in the past few months. T. E. Cowden has exposed a two-foot vein of good milling ore in his Rambler mine. C. T. Champie has been driving a drift on his Golconda mine which will tap the main ore chute at a depth of 20 feet. He states that he has 18 inches of good ore in the face of the drift, with the vein steadily increasing size. He also states that he has encountered a 12-inch streak of \$100 ore in the old Sink to Rise mine, which claim has produced several thousand dollars in high grade ore, most of which was shipped to El Paso for treatment.

Intermountain Exploration Company

O. Box 473

Telephone 293-1098

Boulder City, Nevada 89005

June 12, 1976

Donald R. Aldrige
Supervisor, District 1
P.O. Box 390
Kingman, Ariz., 86401

*I believe
there are
anyone mine
mentioned*

Dear Mr. Aldridge:

Thank you for your letter of June 7th.

We own the Juno mine, and lease the Hercules-Badger group. Just recently we dug deep trenches and sampled our mine dumps with the idea of leaching these.

We estimate that the Juno mine, three claims, contains 75,000 tons of material that will run over 0.03 Au and over 2.0 oz. Ag/ton. This material also contains some lead but under 1%.

At the Hercules-Badger group, approximately 50,000 tons contain over 0.05 oz. Au and over 3 oz. Ag/ton and over 2% Pb.

Doe, Inc. also owns the Rambler, which has a dump containing 3000 tons of 0.10 oz. Au/ton. This should be trenched and sampled.

In another partnership between myself and Tom King of Prescott, Ariz., we hold a large number of gold claims at Cyclopic. At this place we have two tailings dumps that assay over 0.10 oz. Au/ton that should be sampled. These together total about 125,000 tons.

Please let me know if anything develops.

Yours truly,

Richard V. Wyman
Richard V. Wyman, President

